



RGBW FLEXRAYZ NEON


FlexRayz Neon from AgiLight offers a versatile approach to border tube that eliminates light gaps. A side-bending LED neon that provides an excellent solution for linear façade lighting in curved or straight runs, RGBW FlexRayz lets you tune your light to any of 16 million custom colors. Rated IP67 for use in damp and wet locations. FlexRayz products are designed to bend; use Aluminum Mounting Channel for straight run applications.

Applications:

- Borders and edges in signs and facades
- Neon replacements
- Cove and Accent lighting

Features:

- Available in pre-assembled 2 ft (0.61 m) or 8 ft (2.44 m) lengths or sold in full reels of 16.4 ft (5 m)
- Full reels can be cut and finished with an end cap; new power feeds cannot be introduced in the field
- 5.5 W/ft (18.04 W/m), 24 VDC
- RGB+6500K (4000K, 5000K upon request)
- 3.28 in. (83.3 mm) cut lengths
- 110x250° beam angle
- Use Aluminum Mounting Channel for straight runs
- Use S-type Track or Aluminum Mounting Clips for curves
- UV protected; saltwater, solvent & flame resistant
- IP67 ; IK08 impact protection
- Consistent brightness with constant current design
- Minimum bend radius of 1 in. (25 mm)

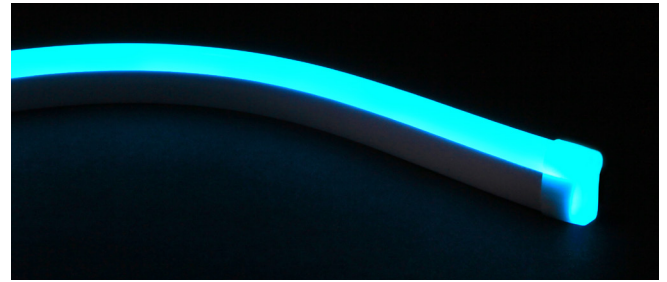

UL CE RoHS LM-80 IP67

ORDERING GUIDE


Part Number	Length	Color	Lumens				
			All LEDs On	Red	Green	Blue	White
LB-FRN-RGBW65-2-A	2 ft / 0.61 m	RGB+6500K	55 lm/ft (180.4 lm/m)	7 lm/ft (23 lm/m)	19 lm/ft (62.3 lm/m)	3 lm/ft (9.8 lm/m)	25 lm/ft (82 lm/m)
LB-FRN-RGBW65-8-A	8 ft / 2.44 m						
LB-FRN-RGBW65-16-A	16 ft 4 in. / 5 m						
LB-FRN-RGBW50-2-A*	2 ft / 0.61 m	RGB+5000K	55 lm/ft (180.4 lm/m)	7 lm/ft (23 lm/m)	19 lm/ft (62.3 lm/m)	3 lm/ft (9.8 lm/m)	25 lm/ft (82 lm/m)
LB-FRN-RGBW50-8-A*	8 ft / 2.44 m						
LB-FRN-RGBW50-16-A*	16 ft 4 in. / 5 m						
LB-FRN-RGBW40-2-A*	2 ft / 0.61 m	RGB+4000K	55 lm/ft (180.4 lm/m)	7 lm/ft (23 lm/m)	19 lm/ft (62.3 lm/m)	3 lm/ft (9.8 lm/m)	25 lm/ft (82 lm/m)
LB-FRN-RGBW40-8-A*	8 ft / 2.44 m						
LB-FRN-RGBW40-16-A*	16 ft 4 in. / 5 m						

* Special order only

SPECIFICATIONS

Input Voltage	24 VDC
Power Consumption	5.5 W/ft (18.04 W/m)
Color	RGB+6500K (special orders for RGB+5000K and RGB+4000K)
Cuttable Length	3.28 in. (83.3 mm)
Max. Length	16.4 ft (5 m)
Available Lengths	2 ft (0.61 m) 8 ft (2.44 m) 16.4 ft (5 m)
Min. Bending Radius	1 in. (25 mm)
Ingress Protection	IP67
Impact Protection Rating	IK08
Lifetime (L70 reported)	50,000 hours @ 60 °C
Warranty	5-year limited warranty

LUMINOUS INTENSITY DISTRIBUTION




Average Beam Angle (50%): 182.2°

Unit: cd

— C0/180, 247.8°


— C90/270, 116.5°

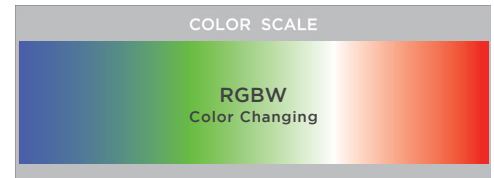



DIMENSIONS

	FlexRayz Neon	Front Bottom Feed End Cap	Closing End Cap (part #: LB-FRN-CAP)
Length	2 ft (0.61 m), 8 ft (2.44 m), and 16.4 ft (5 m)	0.94 in. (24 mm)	0.94 in. (24 mm)
Width	0.55 in. (14 mm)	0.55 in. (14 mm)	0.55 in. (14 mm)
Height	1.06 in. (27 mm)	1.54 in. (39 mm)	1.06 in. (27 mm)

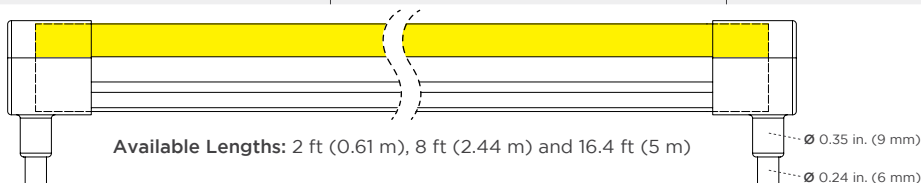

RGBW FlexRayz Neon if cut						
Standard Length (ft)	Actual Light Length		Actual Length with End Caps		Channel Cut Length	
	(ft)	(m)	(ft)	(m)	(ft)	(m)
Single End Feed						
2	1.91	0.58	1.99	0.61	1.76	0.54
8	7.93	2.42	8	2.44	7.77	2.37
16	15.85	4.83	15.93	4.85	15.7	4.79
Double End Feed						
2	1.91	0.58	2.07	0.63	1.76	0.54
8	7.93	2.42	8.08	2.46	7.77	2.37
16	15.85	4.83	16	4.88	15.7	4.79
Minimum Bending Radius			Bending Direction			

ACCESSORIES

	Closing End Cap	Aluminum Mounting Clip for mounting in curved sections only	S-type Track for mounting in curved sections	Aluminum Channel for mounting in straight sections	0.5 in. Standoff for mounting above facade surface
Part No.	LB-FRN-CAP	LB-FRN-CLIPMNT	LB-FRN-CRVMNT	LB-FRN-CHMNT-2	LB-FRN-STDOFF
Length	0.63 in. (16 mm)	0.98 in. (25 mm)	19.7 in. (500 mm)	78.7 in. (2000 mm)	0.38 in. (9.5 mm)
Width	0.67 in. (17 mm)	0.6 in. (15.3 mm)	0.6 in. (15.3 mm)	0.48 in. (12.3 mm)	0.38 in. (9.5 mm)
Height	1.24 in. (31.5 mm)	0.83 in. (21 mm)	0.83 in. (21 mm)	0.67 in. (17 mm)	0.5 in. (12.7 mm)

TO ATTACH END CAPS: When sealing FlexRayz Neon end caps, use a neutral cure (non-acetoxo) silicone adhesive that is non-corrosive and safe for LEDs and electronic circuitry. **DO NOT** use acetoxo (acid-cure) silicone to seal end caps. Acetoxo silicone releases acetic acid that can damage LEDs and electronic components.



POWER SUPPLY LOADING

Product	Power Supply (W)	Max. # of ft/m in a continuous run	Total # of ft/m per power supply NOT in a continuous run
RGBW FlexRayz Neon	60	9.8 / 3	9.8 / 3
	100	16.4 / 5	16.4 / 5
	300	3 outputs: 16.4 / 5 per output	49.1 / 15 (3 outputs: 16.4 / 5 per output)

AVAILABLE POWER SUPPLIES



**30W 24V
POWER SUPPLY**
Part #: PS24-30W-GN
Article #: 28000516A



**100W 24V
POWER SUPPLY**
Part #: PS24-100W-GN
Article #: 28000513A



**60W 24V
POWER SUPPLY**
Part #: PS24-60W-GN
Article #: 28000512A



**300W 24V
POWER SUPPLY**
Part #: PS24-300W-3-GN
Article #: 28000514A

AVAILABLE CONTROLS



**GLASS TOUCH
WALL CONTROLLERS**
Part #: AWCRGBWWBK



**5 ZONE
WALL CONTROLLER**
Part #: DMXCTRL



**10 ZONE
WALL CONTROLLER**
Part #: DMXCTRLD



**5 CHANNEL
DMX DECODER**
Part #: DMXINF5



**4 CHANNEL WATERPROOF
DMX INTERFACE**
Part #: DMXINFWLCD4



**4 ZONE RGBW
RF REMOTE**
Part #: RFREMOTERGBW4Z




**4 CHANNEL
RF INTERFACE**
Part #: RFINTERFACE4CH



CONNECTIONS

WIRELESS RF

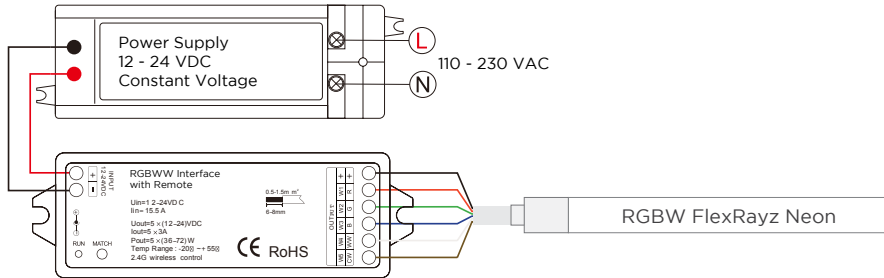

WARNING

- DO NOT Install with power applied to device
- DO NOT expose the device to moisture



RGBWW Interface with Remote
Part #: RFKIT5CH

PROGRAMMING GUIDE

Use the Match key

1. Match:

Quickly press the Interface match key. Within 5 seconds, press the Remote On/Off key

2. Delete:

Press the Interface match key for 5 seconds to delete any matched Remotes.

Power-up

1. To match:

Switch the power off, then on. Within 5 seconds, quickly press the On/Off key on the Remote 3 times. When the light blinks 3 times, the match is confirmed.

2. To delete:

Switch the power off, then on. Within 5 seconds, quickly press the On/Off key on the Remote 5 times. When the light blinks 5 times, the match is deleted.


DMX

FLEXRAYZ NEON WIRE COLORS

- Black (+) Positive
- Red Wire (-) goes to Red Channel
- Green Wire (-) goes to Green Channel
- Blue Wire (-) goes to Blue Channel
- White Wire (-) goes to White Channel



5 Channel DMX Decoder (Part #: DMXINF5)

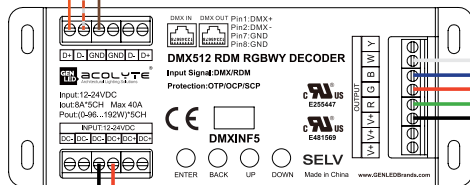

GLOBAL HQ

320 Murray Hill Pkwy
East Rutherford, NJ 07073
U.S.
T: (+1) 212 629 6830
E: Sales-US@GENLEDBrands.com

EUROPEAN HQ

Hogeweyselaan 119
1382 JK Weesp
Netherlands
T: (+31) 346 235 000
E: SalesEurope@GENLEDBrands.com

MEINA HQ

PO Box 371378, #823, Building 4EA
Dubai Airport Free Zone
Dubai, UAE
T: (+971) 4 701 7901
E: SalesMEINA@genledbrands.com

ASIA-PACIFIC HQ

Room 402, Building D
Shensi Tongchuang Science and Technology Park
No. 16 Hongyin Road
Xingqiang Community, Xinhua Street
Guangming District, Shenzhen, China 518107
T: (+86) 755 8529 0710
E: Sales-Pacific@GENLEDBrands.com