



FLEXIBLE BACKLYTE INSTALLATION GUIDE

Tech Support: 212.629.6830



Our US team is in place to answer all of your product questions and help with installations.



U.S. 24-HR TECHNICAL SUPPORT

(+1) 212 629 6830 *301
Tech@GENLEDBrands.com





U.S. PRICING & SALES SUPPORT

(+1) 212 629 6830 *300
Sales-US@GENLEDBrands.com




U.S. CUSTOMER SERVICE

(+1) 212 629 6830 *304
CustomerService@GENLEDBrands.com

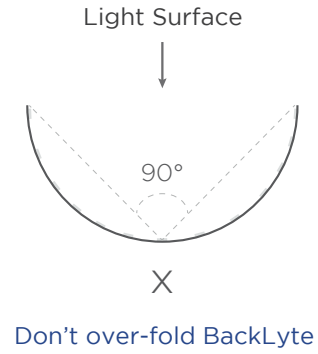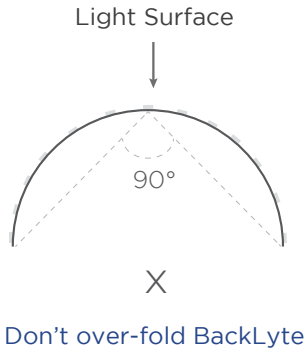


Protection Rating: IP20

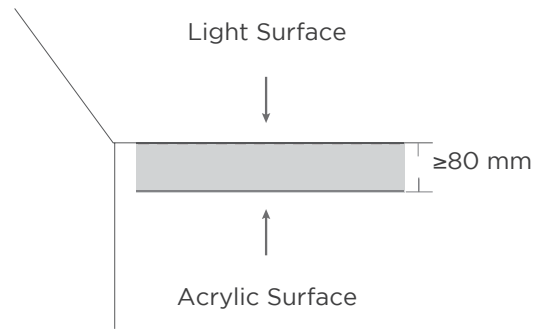


Recommended distance from BackLyte to polycarbonate/acrylic surface ≥80mm




* The Flexible BackLyte can be trimmed into the desired shape along the dotted lines and be powered up with any one of the 4 power input corners. Any of the 4 power input corners (outlined in green) can supply power to the entire sheet of Flexible BackLyte. See examples below:

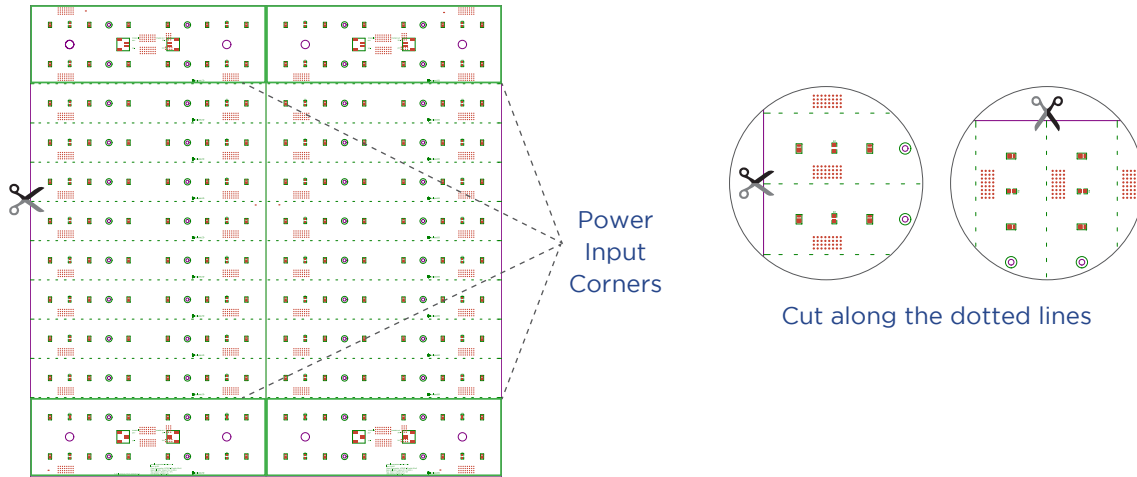


Example 1

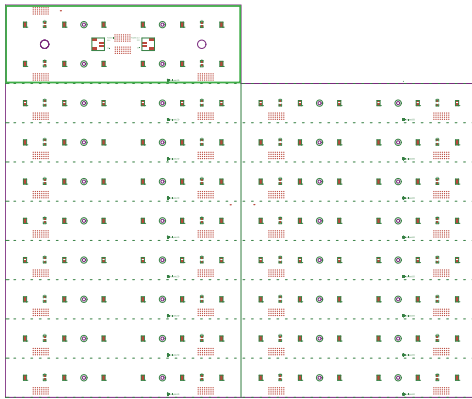


Example 2

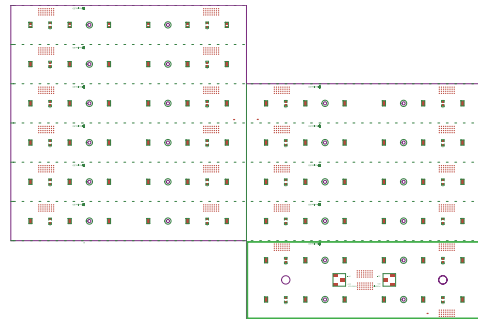

Example 3

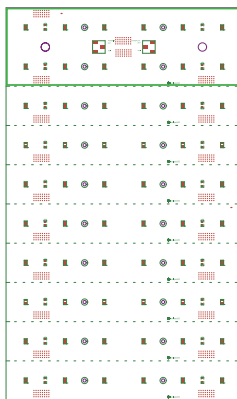


Example 4

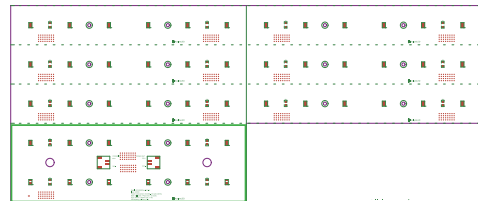





1. Determine installation location.

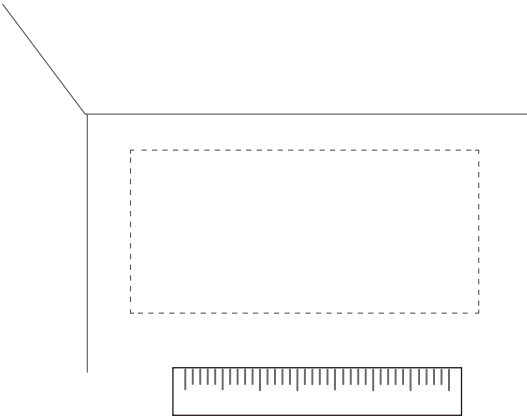

2. Place Flexible BackLyte in desired location. Screw through the screw holes on Flexible BackLyte to secure it in place.

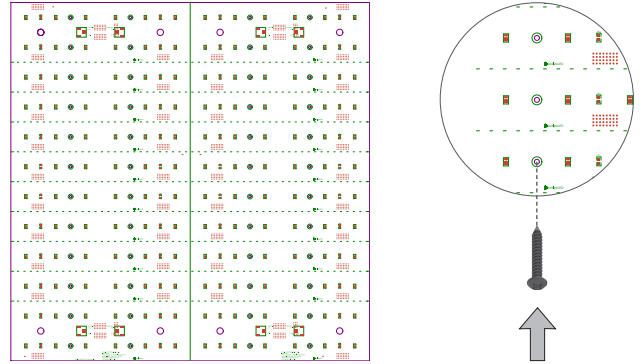


3. Connect power supply to Flexible BackLyte to complete installation.

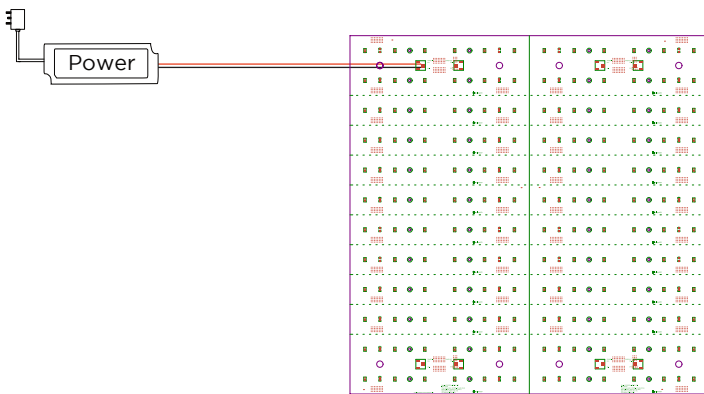





1. Determine installation location.

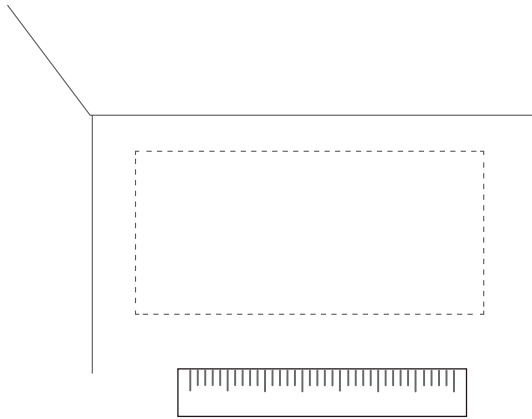

2. Trim Flexible BackLyte along the dotted lines to desired shape.

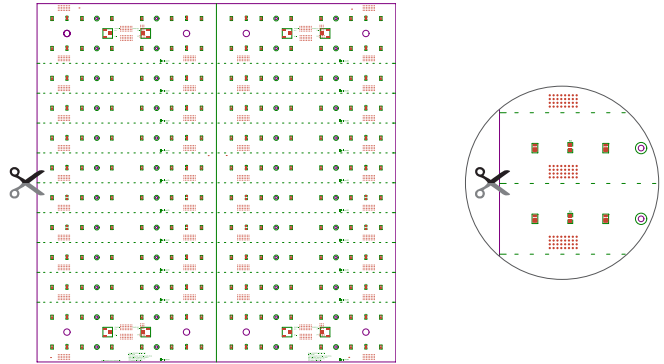

3. Place Flexible BackLyte in desired location. Screw through the screw holes on Flexible BackLyte to secure it in place.

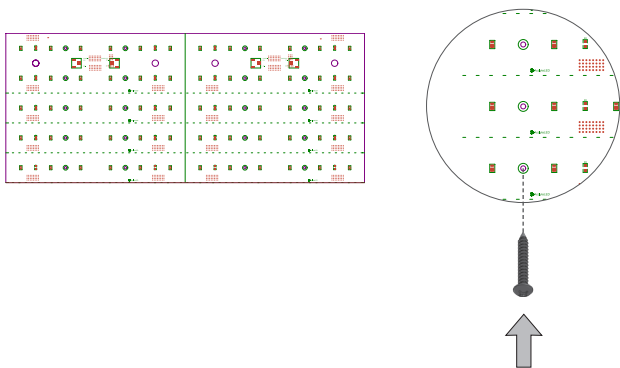

4. Connect power supply to Flexible BackLyte. Maximum number of daisy chained fixtures is 8.

