



RIBBONLYTE INSTALLATION GUIDE

Tech Support: 212.629.6830



Our US team is in place to answer all of your product questions and help with installations.



U.S. 24-HR TECHNICAL SUPPORT

(+1) 212 629 6830 *301
Tech@GENLEDBrands.com



U.S. PRICING & SALES SUPPORT

(+1) 212 629 6830 *300
Sales-US@GENLEDBrands.com



U.S. CUSTOMER SERVICE

(+1) 212 629 6830 *304
CustomerService@GENLEDBrands.com

TECHNICAL SPECIFICATIONS

This product is ETL listed to the following standards:

UL 2108 Issued: 2004/02/27 Ed: 1 Rev: 2014/02/24 Low Voltage Lighting Systems

CSA C22.2#9.0 Issued: 1996/06/01 Ed: 1 (R2011) General Requirements for Luminaires; with Gen. Inst. 1: 1997, Gen Inst. 2: 1998


This product is for indoor or outdoor use and with an option suitable for use in Wet Locations.

All models are suitable for under cabinet, closet and recessed mount.

RibbonLyte models RB followed by 68 are rated IP68 in accordance with IEC 60598-1.



SILICONE MOUNTING PAD INSTALLATION



Rubbing Alcohol
(for metallic surfaces)



Silicone Pad



Screws




RibbonLyte

1




Clean the mounting surface free of dust and debris using a damp cloth. For metallic mounting surfaces, wipe clean with rubbing alcohol.

2

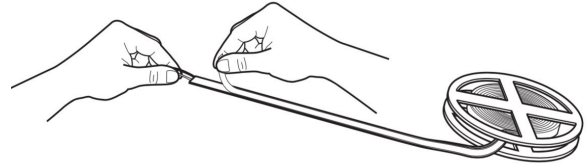


Remove the backing from the adhesive on the RibbonLyte.

3

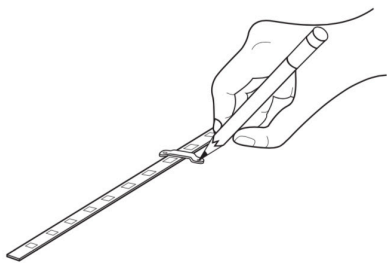


Place a silicone pad over RibbonLyte every 12 inches. Mark surface with a pencil for all pilot holes to be drilled. NEVER cover an LED with a silicone pad.

4

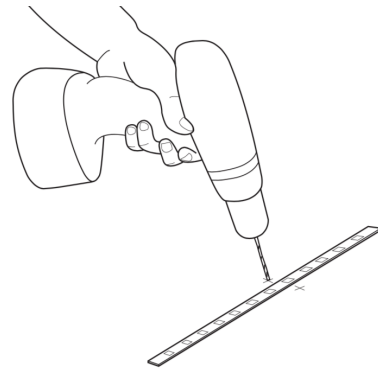


Drill pilot holes at center of each mark.

5

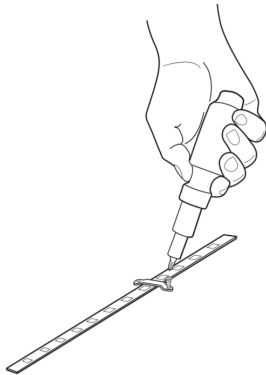

Tighten the screws through the silicone pads until RibbonLyte is tightly secured.

6

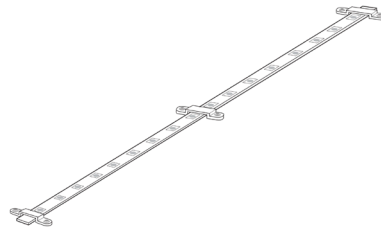

Your RibbonLyte installation is now complete.