


## 4 CHANNEL WATERPROOF DMX INTERFACE

**GENLED Acolyte®**'s Waterproof DMX Interface is used with our DMX controllers to seamlessly operate our color changing Ribbonlyte and fixtures.

- 12 - 36 V input
- 4 Channels
- 5A max per channel output / 20A max
- IP66 Protection, rated for outdoor use
- LCD display for digital programming
- Power In / Out

### Applications:

Commercial	Hospitality	Residential
Entertainment	Museums	Retail
Healthcare	Public Spaces	

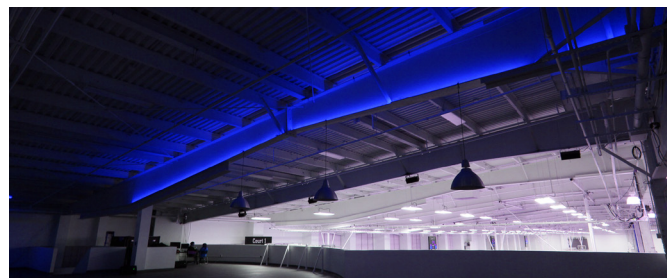

### Dimensions



**Width:** 2.88 in (73 mm)  
**Length:** 7.09 in (180 mm)  
**Depth:** 1.53 in (39 mm)

## ORDERING GUIDE

### STANDARD


#### Category

**DMXINFWLCD4**


**DMXINFWLCD4** - 4 Channel Waterproof DMX Interface

SPECIFICATIONS / DIMENSIONS / FUNCTIONS

FUNCTIONS

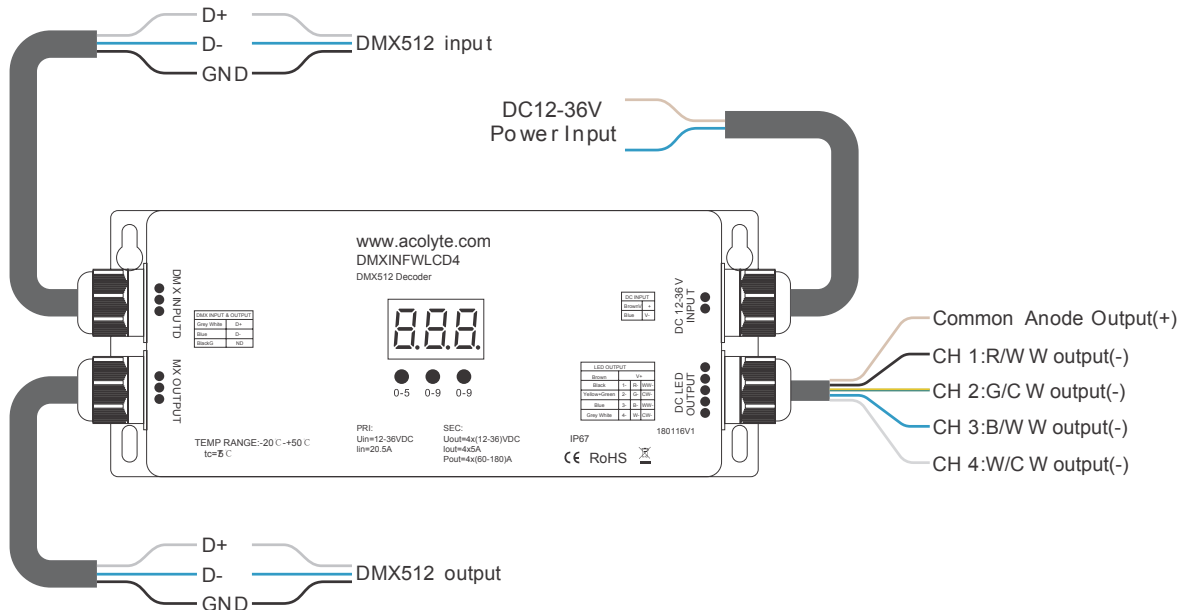

WIRING DIAGRAM

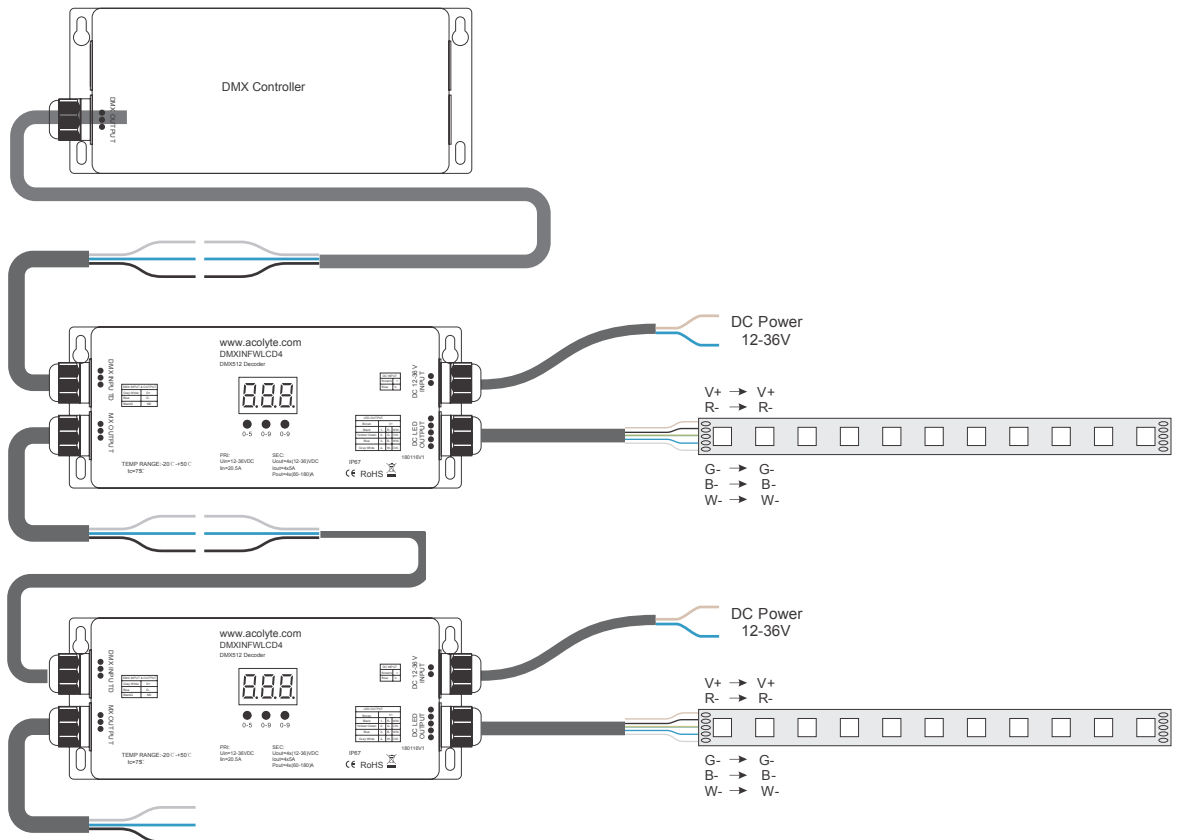

GENLED Acolyte® does not warrant or represent that the information is free from errors or omission. The information may change without notice and GENLED Acolyte® is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

REV.01JUN2020