

Date

Notes

5 CHANNEL DMX INTERFACE

The **GEN**LED Acolyte® 5 Channel DMX Interface is used with our DMX controllers to seamlessly operate our color changing RibbonLyte and fixtures.

- 5 Channel DMX Interface
- 12-24 VDC output
- 8 A max per channel output
- 12 V max power output: 96 W/Channel
- 24 V max power output: 192 W/Channel
- 3 DMX input styles: Terminal Block, 5 Pin XLR, RJ45
- Connect 32 max interfaces on single chain
- Over 32 devices require use of DMX signal isolator/splitter
- DMX terminator required at end of chain



Commercial Hospitality Entertainment Museums Healthcare Public Spaces Residential Retail












5-Day QuickShip Program

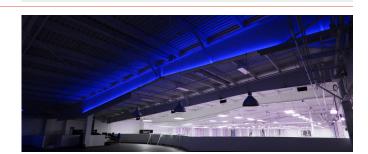

Project



Dimensions





Width: 2.87 in (73 mm) Length: 6.45 in (164 mm) **Depth:** 1.49 in (38 mm)

ORDERING GUIDE

STANDARD

Category

DMXINFLCD5

DMXINFLCD5 - 5 Channel DMX Interface

GENLED Acolyte® does not warrant or represent that the information is free from errors or omission. The information may change without notice and GENLED Acolyte® is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used. REV.01JUN2020