



Date _____ Project _____

Notes _____

NON-DIMMING UL LISTED ELECTRONIC DRIVER

This Constant Voltage Class 2 LED Driver is UL Listed. The UL Listed type enclosure has a built-in junction box on both the input and output. This driver is IP65 rated and is suitable for both indoor and outdoor installations. With universal input voltage ranging from 120 to 277VAC, DRVW2430, DRVW2460, DRVW2496 drivers are designed for commercial, industrial and residential applications.



- UL Listed Enclosure - With Built-In Junction Boxes
- Universal Input Voltage
- IP65 - For Both Indoor and Outdoor Use, UL 8750 Approved
- Class 2, Class P
- Auto-Reset Protection for Short Circuit and Over-Temperature
- Over Load Protection - CC Mode
- 5-year warranty

Applications:


Commercial	Hospitality	Residential
Entertainment	Museums	Retail
Healthcare	Public Spaces	Industrial



IP65



5-Day QuickShip Program

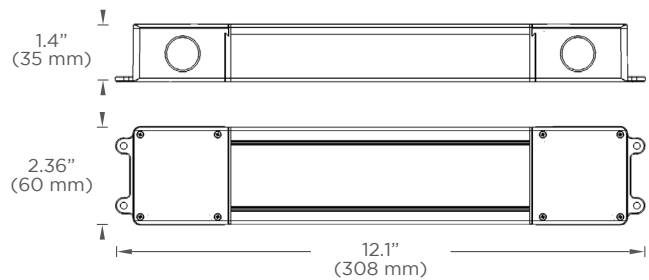

ORDERING GUIDE

Category	Voltage	Wattage
DRVW	24	
DRVW - Waterproof Driver	24 - 24 V	30 - 30W 60 - 60W 96 - 96W

SPECIFICATIONS

	DRVW2430	DRVW2460	DRVW2496
Output Voltage	24V DC	24VDC	24VDC
Max Output Current	1300mA	2600mA	4100mA
Input Voltage Range	120 - 277VAC	120 - 277VAC	120 - 277VAC
Input Frequency	50 / 60Hz	50 / 60Hz	50 / 60Hz
Efficiency	> 81% Max	> 87% Max	> 87% Max
Max Input Current	0.96A	0.96A	0.96A
Expected Life Time	50K Hours (> 65°C) Tc	50K Hours (> 65°C) Tc	50K Hours (> 65°C) Tc
Operating Temperature	-25°C - +40°C	-25°C - +40°C	-25°C - +40°C
Dimensions	12.1 in (308 mm) L x 2.36 in (60 mm) W x 1.4 in (35 mm) H		

MAXIMUM WIRE LENGTH FROM DRIVER TO LED AT FULL LOAD							
Wattages	30 W		60 W		96 W		
	Feet	Meters	Feet	Meters	Feet	Meters	
24 AWG	14	4.27	9	2.74	5.5	1.68	
22 AWG	22	6.71	14	4.27	9	2.74	
20 AWG	35	10.67	23	7.01	14	4.27	
18 AWG	56	17.07	37	11.28	23	7.01	
16 AWG	90	27.44	60	18.29	37	11.28	
14 AWG	142	43.29	95	28.96	59	17.99	
12 AWG	226	68.90	151	46.04	94	28.66	
10 AWG	360	109.76	240	73.17	150	45.73	
8 AWG	574	175.00	381	116.16	239	72.87	

REV.02JUN2020

GENLED Acolyte[®] does not warrant or represent that the information is free from errors or omission. The information may change without notice and GENLED Acolyte[®] is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.