

ARMOR SERIES | NANO EXTERIOR LINEAR FIXTURES

The Nano Linear fixture is the perfect solution for projects that require high output and tight beam control in minimal space. With three premium optic lens options and three standard lengths, the sleek anodized Nano Linear features six brilliant dimmable CCTs (2700K-6000K) that can be tailored for any application. Use Nano Linear to highlight architectural details or navigate small ledges and locations where space is at a premium. Armor Series Nano Linear fixtures come with a three-year warranty.



GEL-FLUSH™ TECHNOLOGY

The Armor Series Nano Linear fixture is manufactured with GelFlush™ Technology. This proprietary innovation uses a special Dow Corning sealant to protect your lighting from the elements. With Acolyte's Armor Series, there's no leaking and no condensation -- just clear, unobstructed beams of light!



ORDERING GUIDE

Category	CRI	Length	Color Temperature		FWHM Beam Angle	Mounting Option
NANO						
NANO - Armor Nano	80 - 80+ CRI	0.2 - 182 mm / 7.2 in. (3 W)	27 - 2700K	40 - 4000K	25X35 - 25x35°	SI - Snap-In
	90 - 90+ CRI	0.5 - 500 mm / 19.7 in. (9 W)	30 - 3000K	50 - 5000K	30 - 30x30°	TS - Tilttable Stand
		1.0 - 1000 mm / 39.4 in. (18 W)	35 - 3500K	60 - 6000K	55 - 55x55°	

OPTIONAL ACCESSORIES:

1.) Armor Series Mounting Arms:

Small: ARMORMNT0609
Large: ARMORMNT1422

2.) Symmetric Louver:

NANOLOUV182 (182 mm)
NANOLOUV500 (500 mm)
NANOLOUV1000 (1000 mm)

3.) 2 Pin Male to Female Jumper Cable:

NANOJUMPMF1000 (1000 mm)
NANOJUMPMF2000 (2000 mm)

4.) 2 Pin Female Cable to Bare Wire:

NANOCBLFB300 (300 mm)
NANOCBLFB500 (500 mm)
NANOCBLFB1000 (1000 mm)
NANOCBLFB2000 (2000 mm)

DRIVERS:

NON-DIMMING ELECTRONIC DRIVERS



30W, 60W, 96W Non-Dimming Electronic Class 2 Drivers

Part No.:
• DRVW2430 (30 W)
• DRVW2460 (60 W)
• DRVW2496 (96 W)



240W, 320W Non-Dimming Electronic Drivers

Part No.:
• DRVW24240 (240 W)
• DRVW24320 (320 W)



60W, 96W Non-Dimming Compact Drivers

Part No.:
• DRV2460C (60 W)
• DRV2496C (96 W)



0-10V/ELV/MLV 3-IN-1

60W, 96W, 288W 0-10V/ELV/MLV 3-in-1 Dimmable Drivers

Part No.:
• DRVW2460TRI010 (60 W)
• DRVW2496TRI010 (96 W)
• DRVW24288TRI010 (288 W)

ATHENA WIRELESS COMPATIBLE



94W Athena Wireless Compatible Drivers

Part No.:
• DRVW2494ATH1CH (1 channel)
• DRVW2494ATH2CH (2 channel)

CASAMBI COMPATIBLE DRIVERS



100W & 200W Casambi Compatible 4 Channel Drivers

Part No.:
• DRVW24100CAS4CH (100 W)
• DRVW24200CAS4CH (200 W)

DIMMABLE DALI-2 DRIVERS



96W Dimmable DALI-2 DT6 D4I & DT8 D4I Drivers

Part No.:
• DRVW2496DALI1CH (1 channel)
• DRVW2496DALI2CH (2 channel)


DIMMABLE DALI-2 DRIVERS




75W, 150W, 240W DALI-2 Dimmable Drivers

Part No.:
• DRVW2475DALI1CH (75 W, 1 channel)
• DRVW24150DALI1CH (150 W, 1 channel)
• DRVW24240DALI1CH (240 W, 1 channel)
• DRV24150DALI2CH (150 W, 2 channels)
• DRV24150DALI4CH (150 W, 4 channels)

AVAILABLE COLOR TEMPERATURES



AVAILABLE BEAM ANGLES



SPECIFICATIONS

Operating Voltage	24 VDC								
Length	7.2 in. / 182 mm			19.7 in. / 500 mm			39.4 in. / 1000 mm		
Power Consumption	3 W			9 W			18 W		
LEDs per Fixture	6 LEDs			15 LEDs			30 LEDs		
Amperage	0.125 A			0.375 A			0.75 A		
Color Temperature	2700K, 3000K, 3500k, 4000K, 5000K, 6000K								
LED Beam Angle	30x30°	55x55°	25x35°	30x30°	55x55°	25x35°	30x30°	55x55°	25x35°
Lumen Output / Foot	355	359	352	355	359	352	355	359	352
Total Lumens	212	214	210	582.3	588.7	577.1	1164.6	1177.4	1154.2
Max. Run Length	Up to 14 fixtures			Up to 6 fixtures			Up to 4 fixtures		
Weight	0.77 lb / 0.35kg			1.65 lb / 0.75kg			3.3 lb / 1.5kg		
CRI	80+ or 90+								
LED Binning (SDCM)	3-step (80 CRI) or 2-step (90 CRI)								
Dimming Options	0-10 V, ELV/MLV, DALI								
Binning Tolerance	+/-100K								
Ambient Temperature	-40 — 122 °F (-40 — 50 °C)								
Housing / Lens	Housing: Extruded Aluminium / Lens: Clear UV Protected PMMA Cover: Tempered Glass End Caps: Extruded Aluminium / Brackets: Extruded Aluminium Housing, bracket, end cap material – 6063 high density aluminum alloy								
Connector	2 pin power connector								
Cable Length	11.81 in. / 300 mm								
Protection Rating	IP66								
Impact Rating	IK08								
Mounting Options	Snap-In Clip, Tilttable Stand (140° adjustable), Mounting Arms (available in 2 different sizes)								
Lifetime (L70 reported)	50,000 hours								
Certifications	CE, ETL / Luminaires – UL 1598, 3rd Ed., issued September 17, 2008, Rev. October 17, 2012 / Luminaires – CSA C22.2 No.250.0-08, 3rd Ed., issued September 17, 2008, Rev. October 17, 2012 (R2013)								
Fixture Color Finish	Anodized silver								


* ALL LUMEN DATA IS FROM 2700K 80 CRI FIXTURES

DIMENSIONS


7.2 in. / 182 mm:



19.7 in. / 500 mm:

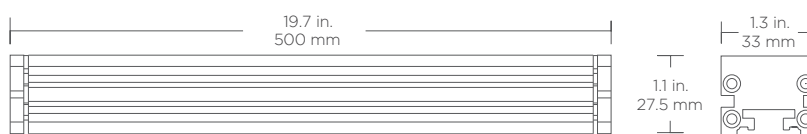

39.4 in. / 1000 mm:

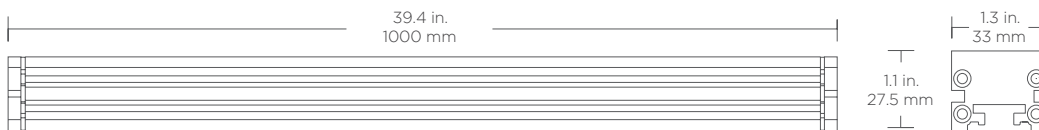



Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

MOUNTING HARDWARE / ACCESSORIES

MOUNTING HARDWARE


Snap-in Clip

For narrow installations where mounting clips need to be installed first

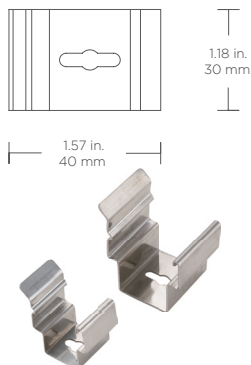


Tilttable Stand

For adjustable mounting angles




R 0.09 in. (2.29 mm) Thru



Mounting Arms

Small Mounting Arm Part Number: ARMORMNT0609
Large Mounting Arm Part Number: ARMORMNT1422

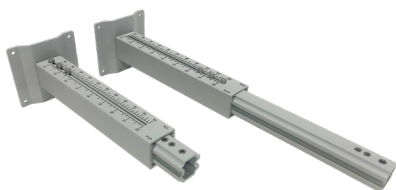


Armor Series Mounting Arm

Adjustable mounts (in 2 sizes) help set desired angle and distance from lighting surface


Adjustable Length Between Wall to Fixture

Small Mounting Arm: 6-9 in. (152-229 mm)
Large Mounting Arm: 14-22 in. (356-559 mm)

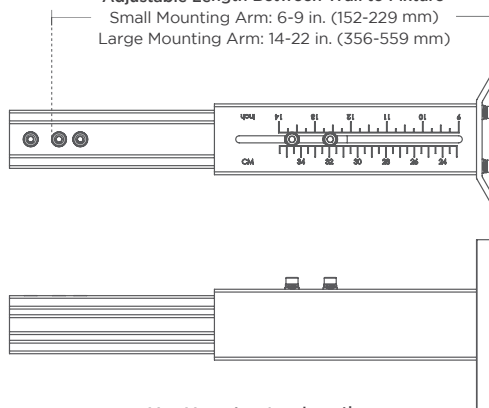

Max Mounting Arm Length

Small Mounting Arm: 10 in. (254 mm)
Large Mounting Arm: 23 in. (585 mm)

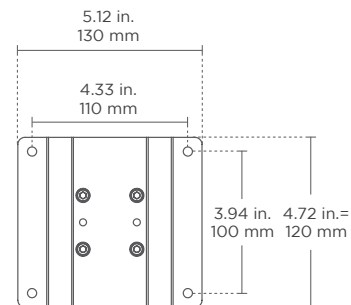


ACCESSORIES

Louver

Part Number: NANOLOUV

For glare reduction
Note: This will affect beam angle

NANOLOUV182 (182 mm)
NANOLOUV500 (500 mm)
NANOLOUV1000 (1000 mm)



Side View

Not recommended for exterior applications

2 Pin Female Cable To Bare Wire

Part Number: NANOCBLFB

To bare wire for incoming power

NANOCBLFB300 (300 mm)
NANOCBLFB500 (500 mm)
NANOCBLFB1000 (1000 mm)
NANOCBLFB2000 (2000 mm)



2 Pin Male To Female Jumper Cable

Part Number: NANOJUMPMF

To connect 2 pin male connector to 2 pin female connector

NANOJUMPMF1000 (1000 mm)
NANOJUMPMF2000 (2000 mm)




INCLUDED IN BOX




Fixture with 19.7 in. / 500mm input/output cables
+ 2 pin connectors

CONNECTION


NON-DIMMING FOR CASE 1:

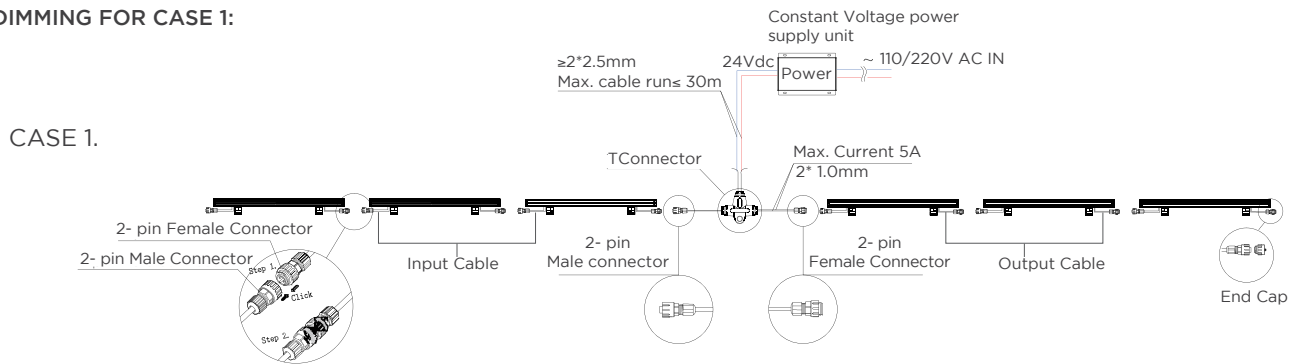


CASE 2.

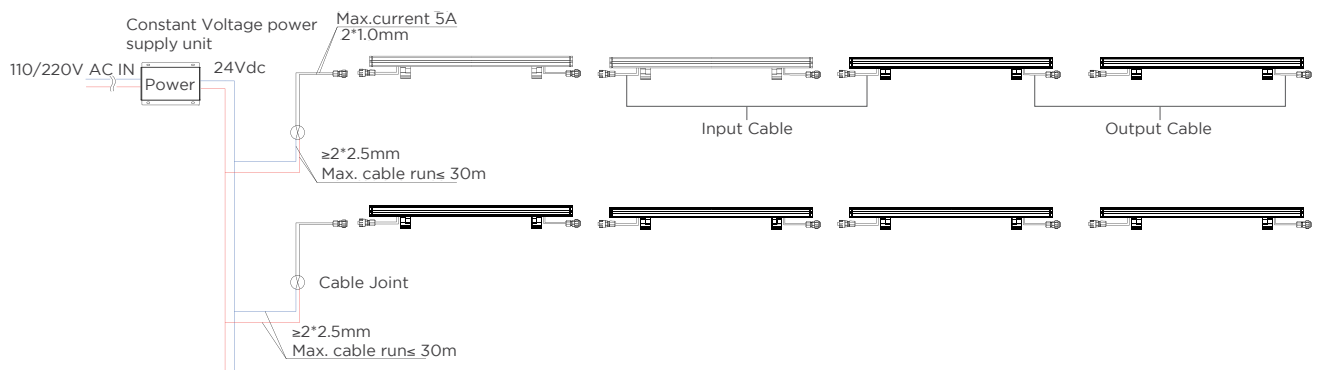

0-10V DIMMING:

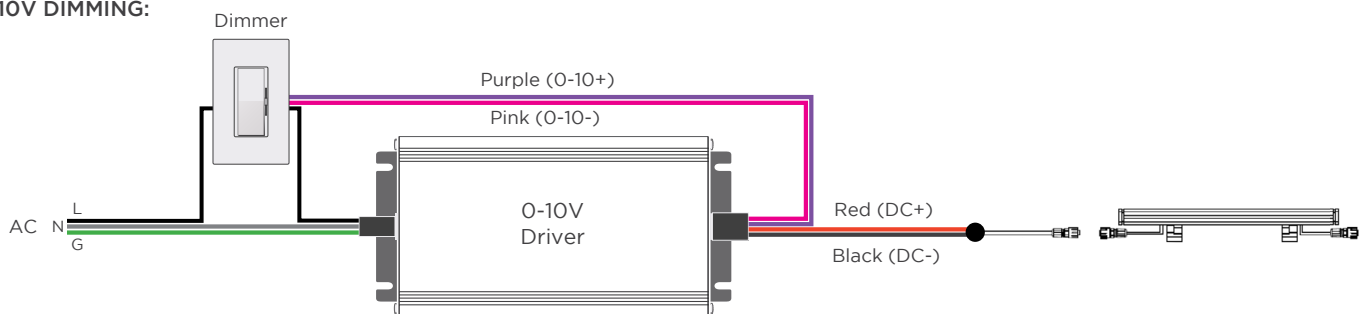


ELV/MLV DIMMING:

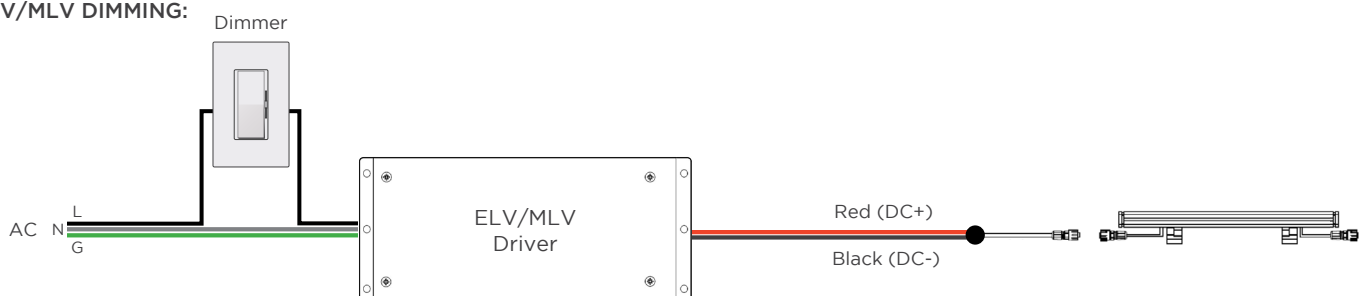


CONNECTION

DALI DIMMING:

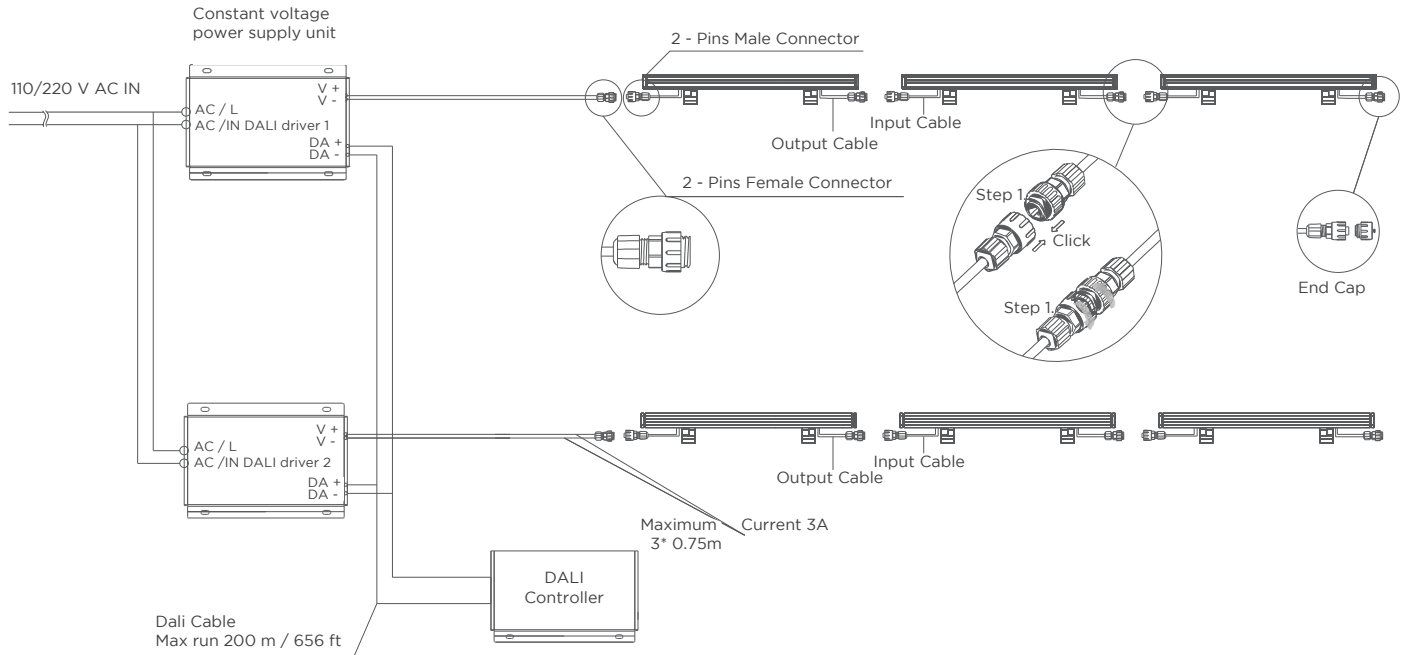

CONNECTORS:

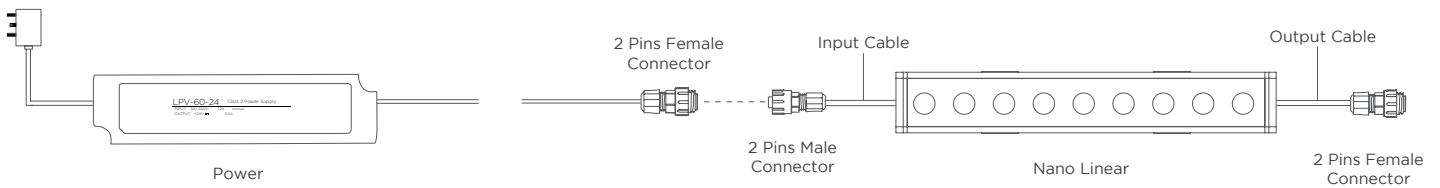

REV.14SEP2026

GLOBAL HQ

320 Murray Hill Pkwy
East Rutherford, NJ 07073
U.S.
T: (+1) 212 629 6830
E: Sales-US@GENLEDBrands.com

EUROPEAN HQ

Hogeweyselaan 119
1382 JK Weesp
Netherlands
T: (+31) 346 235 000
E: SalesEurope@GENLEDBrands.com

MEINA HQ

PO Box 371378, #823, Building 4EA
Dubai Airport Free Zone
Dubai, UAE
T: (+971) 4 701 7901
E: SalesMEINA@genledbrands.com

ASIA-PACIFIC HQ

Room 402, Building D
ShenShi Tongchuang Science and Technology Park
No. 16 Hongyin Road
Xingqiang Community, Xinhua Street
Guangming District, Shenzhen, China 518107
T: (+86) 755 8529 0710
E: Sales-Pacific@GENLEDBrands.com