

AS10 CHANNEL FIXTURE

AS10 Channel is a surface mounted aluminum extrusion that offers clear or milky lens options. With a beam angle of 110 degrees, AS10 Channel fits RibbonLyte strips with a maximum width up to 0.39 in. (10 mm).

- Available for field assembly or factory assembly
- 0.47 in. (12 mm) wide by 0.47 in. (12 mm) deep
- Beam angle 110°
- Wattage Range from 0.75 W/ft (2.46 W/m) to 4.4 W/ft (14.4 W/m)
- Static White delivered lumen range from 47 lm/ft (155 lm/m) up to 585 lm/ft (1920 lm/m)
- Clear or Milky Lens
- Continuous run length for Milky Lens is up to 66 ft (20 m)




RoHS

Declare.



HOUSING FINISHES



*Additional fee applies

LENS FINISHES




Clear Lens
93% Light Transmission



Milky Lens
75% Light Transmission
Continuous run length up to 66 ft (20 m)

AVAILABLE COLORS & COLOR TEMPERATURES





DIMENSIONS

AS10 Channel	Mounting Clip (included accessory)
Width: 0.47 in. (12 mm) Height: 0.47 in. (12 mm) Internal Width: 0.39 in. (10 mm) Internal Height: 0.31 in. (8 mm)	Material: stainless steel Side View Width: 0.52 in. (13.1 mm) Length: 0.63 in. (16 mm) Top View Assembled View Option 1: 0.57 in. (14.4 mm) Option 2: 0.51 in. (13 mm) Width: 0.52 in. (13.1 mm) Height (option 1): 0.57 in. (14.4 mm) Height (option 2): 0.51 in. (13 mm) Note: 1. Magnetic mounting option available (see page 2) 2. Exterior channel applications should be securely attached to the mounting surface with appropriate screws and/or liquid nails. Acolyte strongly recommends field assembly for exterior applications. Use mounting clips for interior applications only.

SPECIFICATIONS

Beam Angle	110°
Lens Type	Clear Lens, Milky Lens (continuous run length for Milky Lens is up to 66 ft / 20 m)
Length	Channel is sold by the foot and cut to your exact desired length. Required amount of mounting clips included.
Operating Voltage	24 V
Dimming	MLV / 0-10 Volt / ELV / DALI / CASAMBI
Operating Temperature	-40 — 158 °F (-40 — 70 °C)
Colors	1800K, 2000K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 6000K, Red, Amber, Green, Blue, VW (1800K, 2000K, 2200K only available in IP20)
CRI	90+ CRI (for Static White LEDs only)
Lamp Life	L70 at 50,000 hours
MacAdam ellipse (SDCM)	1-Step Binning (for Static White LEDs only)
Certifications	UL Listed UL 2108 Issued: 2004/02/27 Ed: 1 Rev: 2014/02/24 Low Voltage Lighting Systems CSA C22.2#9.0 Issued: 1996/06/01 Ed: 1 (R2011) General Requirements for Luminaires; with Gen. Inst. 1: 1997, Gen Inst. 2: 1998. ROHS compliant

ACCESSORIES (SEE PART NUMBERS AT STEP 4 ON PAGE 3)

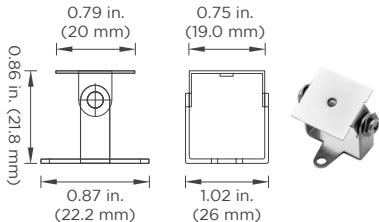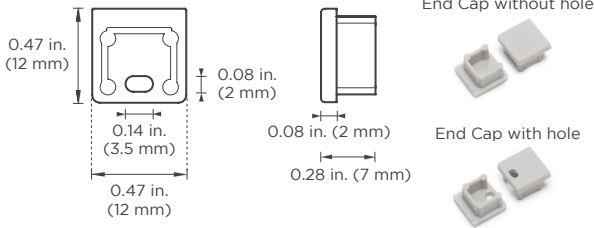Tilttable Stand	End Caps
 Assembled Height with Channel (Option 1): 1.43 in. (36.2 mm) Assembled Height with Channel (Option 2): 1.37 in. (34.8 mm)	Material: ABS  End Cap without hole End Cap with hole

Magnetic Mount (Part #: CHMAG0.5)	
	Side View  0.125 in. (3.175 mm) 0.5 in. (12.7 mm) Top View  Ø 0.2 in. (5.08 mm) Assembled View  0.69 in. (17.6 mm)
Features: - High-energy neodymium magnets come attached to mounting clips with countersink hex nuts - Create easy-mount magnetic channels with minimal surface gaps; no tools or drilling necessary - Magnets rated for 8 lbs. of pull force with static load Applications: - Industrial lighting retrofits for troffers and other metal fixtures - Metal retail shelf lighting - Temporary light fixture installations	

ORDERING GUIDE

STEP 1 Complete Channel Part Number

CHANNEL	LENS	HOUSING COLOR
CHAS10		
CHAS10 - AS10 Channel	C - Clear Lens M - Milky Lens* * Continuous run length for Milky Lens is up to 66 ft (20 m)	SV - Silver WH - White** BK - Black** ** Additional fee applies Consult factory for custom colors

STEP 2 Complete RibbonLyte Part Number

CATEGORY	CRI	RIBBON TYPE & IP RATING
RB		
RB - RibbonLyte	0 - Static Color, Color Changing 90 - 90+ CRI Static White	SWS220 - Static White Series 2 IP20 VWS220 - VW Series 2 IP20 SWS265 - Static White Series 2 IP65 VWS265 - VW Series 2 IP65 SCS220 - Static Color Series 2 IP20 LINEA20 - Linea RibbonLyte IP20 SCS265 - Static Color Series 2 IP65 XACTA20 - Xacta RibbonLyte IP20


NOTE: To ensure waterproofing standards are met, IP65 RibbonLyte can NOT be cut in the field.

WATTAGE	COLOR
0.75 - 0.75 W/ft (2.46 W/m - Static White, Static Color)	18 - 1800K R - Red
1.0 - 1.0 W/ft (3.3 W/m - Variable White)	20 - 2000K A - Amber
1.5 - 1.5 W/ft (4.9 W/m - Static White, Static Color, Variable White)	22 - 2200K G - Green
2.2 - 2.2 W/ft (7.2 W/m - Static White, Static Color)	24 - 2400K B - Blue
2.4 - 2.4 W/ft (8 W/m - Static White Linea)	27 - 2700K VW - Variable White 2000K-6500K
3.0 - 3.0 W/ft (9.8 W/m - Static White, Static Color, Variable White)	30 - 3000K VW1833 - Variable White 1800K-3300K (IP20)
4.4 - 4.4 W/ft (14.4 W/m - Static White, Static Color)	35 - 3500K Z - Undecided (For quotes only. Must be chosen before final order.)
4.5 - 4.5 W/ft (14.8 W/m - Static White, Variable White)	40 - 4000K
6.0 - 6.0 W/ft (19.7 W/m - Variable White)	60 - 6000K

CONNECTION OPTIONS (See diagrams on the right)

Custom Length (ft.)

- | | |
|------------------------------------|-------------------------------------|
| 1 - End Feed Bare Wire Connection | 4 - End Feed with IP67 Male Coupler |
| 2 - Back Feed Bare Wire Connection | 5 - Soldered Daisy Chain |
| 3 - Side Feed Bare Wire Connection | 6 - Daisy Chain With IP67 Couplers |

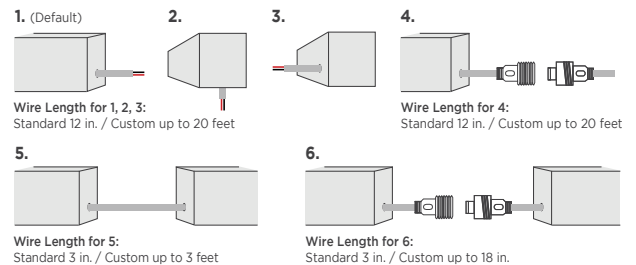

STEP 3 Complete Assembly Option & Length


ASSEMBLY OPTION	LENGTH (Standard factory assembled length up to 6 ft 6.7 in. / 2 m)
FI - Field Assembly	
FA - Factory Assembly*** (not recommended for exterior applications)	

*** Factory assembled runs exceeding 6 ft 6.7 in. (2 m) will be split into multiple daisy chained fixtures.

STEP 4 Add Accessories

ACCESSORIES
TILTSTANDST - Tilttable Stand
CHMAG0.5 - Magnetic Mount

DO NOT BUTT END CAPS AGAINST EACH OTHER WHEN CREATING LONGER FIXTURES
Acolyte STRONGLY SUGGESTS field assembly (without using interior end caps) for direct-view fixtures of more than 6 ft 6.7 in. (2 m) in length. Field assembly without interior end caps will eliminate gaps or dead spots that can be caused by butting interior end caps against each other.

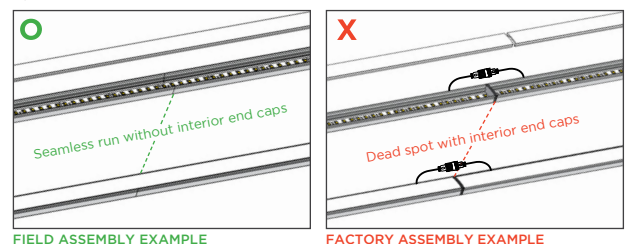

RIBBONLYTE SPECIFICATIONS & COMPATIBILITY

Available Wattages	Incremental Length	LED Pitch	Colors & CCTs	Delivered Lumens with Clear Lens		Delivered Lumens with Milky Lens		Max Length	Compatible with Channel			
				lm/ft	lm/m	lm/ft	lm/m		IP20	IP65	IP68	IP69
0.75 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	1800K	59	192	47	155	IP20: 49 ft (15 m) IP65: 32.8 ft (10 m)	✓	✓		
			2000K	69	227	56	183					
			2200K	76	249	61	201					
			2400K	79	259	64	209					
			2700K	86	281	69	227					
			3000K	86	281	69	227					
			3500K	91	297	73	240					
			4000K	93	307	75	247					
			6000K	91	300	74	242					
1.5 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	1800K	117	384	95	310	IP20: 49 ft (15 m) IP65: 32.8 ft (10 m)	✓	✓		
			2000K	137	449	110	362					
			2200K	152	499	123	402					
			2400K	158	517	127	417					
			2700K	172	563	138	454					
			3000K	172	563	138	454					
			3500K	180	590	145	476					
			4000K	187	613	151	495					
			6000K	183	600	147	484					
2.2 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	1800K	169.8	557	136.96	449	IP20: 42 ft (12.8 m) IP65: 32.8 ft (10 m)	✓	✓		
			2000K	196.4	644	158.4	520					
			2200K	216.9	712	174.9	574					
			2400K	227.1	745	183.15	601					
			2700K	245.5	806	198	650					
			3000K	249.6	819	201.3	660					
			3500K	259.8	852	209.55	687					
			4000K	272.1	893	219.45	720					
			6000K	261.9	859	211.2	693					
3.0 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	1800K	234	769	189	620	IP20: 36 ft (11 m) IP65: 32.8 ft (10 m)	✓	✓		
			2000K	273	897	221	723					
			2200K	301	989	243	797					
			2400K	306	1005	247	811					
			2700K	343	1125	277	907					
			3000K	363	1190	293	960					
			3500K	371	1217	299	982					
			4000K	371	1217	299	982					
			6000K	357	1172	288	945					
4.4 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	1800K	331	1087	267	877	28 ft 4 in. (8.64 m)	✓	✓		
			2000K	389	1275	314	1029					
			2200K	430	1410	347	1137					
			2400K	446	1463	360	1180					
			2700K	499	1638	403	1321					
			3000K	528	1732	426	1397					
			3500K	540	1772	436	1429					
			4000K	540	1772	436	1429					
			6000K	516	1692	416	1364					
0.75 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	29	94	23	76	IP20: 49 ft (15 m) IP65: 32.8 ft (10 m)	✓	✓		
			Green	122	400	98	323					
			Blue	13.3	43	10.69	35					
			Amber	24	78	19	63					
1.5 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	59	192	47	155	IP20: 49 ft (15 m) IP65: 32.8 ft (10 m)	✓	✓		
			Green	223	732	180	591					
			Blue	25	82	20	66					
			Amber	47	156	38	125					

RIBBONLYTE SPECIFICATIONS & COMPATIBILITY

Available Wattages	Cutttable Length	LED Pitch	Colors & CCTs	Delivered Lumens with Clear Lens		Delivered Lumens with Milky Lens		Max Length	IP20	Compatible with Channel		
				lm/ft	lm/m	lm/ft	lm/m			IP65	IP68	IP69
2.2 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	86	282	69	277	IP20: 42 ft (12.8 m) IP65: 32.8 ft (10 m)	✓	✓		
			Green	297	973	239	785					
			Blue	37	121	30	97					
			Amber	70	228	56	184					
3.0 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	112	366	90	295	32.8 ft (10 m)	✓	✓		
			Green	354	1162	286	937					
			Blue	70	229	56	185					
			Amber	81	265	65	214					
4.4 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	155	510	125	411	29 ft (8.8 m)	✓	✓		
			Green	479	1571	386	1267					
			Blue	98	322	79	260					
			Amber	102	336	83	271					
2.4 Static White Linea	1.97 in. (50 mm)	146 LEDs/ft (480 LEDs/m)	2700K	149.7	491	120.8	396	21.3 ft (6.5 m)	✓	n/a	n/a	n/a
			3000K	158.1	519.9	127.5	419.3					
			3500K	185.1	608.2	149.3	490.5					
			4000K	185.1	608.2	149.3	490.5					
3.0 Static White Linea	1.97 in. (50 mm)	146 LEDs/ft (480 LEDs/m)	2700K	184.1	604.5	148.5	487.5	21.3 ft (6.5 m)	✓	n/a	n/a	n/a
			3000K	203.7	668.7	164.3	539.3					
			3500K	217.6	714.2	175.5	576					
			4000K	231.6	759.8	186.8	612.8					
4.3 Static White Linea	1.97 in. (50 mm)	146 LEDs/ft (480 LEDs/m)	2700K	300.4	983.9	242.3	793.5	24.6 ft (7.5 m)		n/a	n/a	n/a
			3000K	311.6	1023	251.3	825					
			3500K	344.1	1128	277.5	910.5					
			4000K	344.1	1128	277.5	910.5					
6.1 Variable White Linea	1.09 in. (27.78 mm)	175 LEDs/ft (576 LEDs/m)	2700K 6500K	539.4	1769.8	435	1427	16.4 ft (5 m)		n/a	n/a	n/a
1.5 Static White Xacta	0.2 in. (5 mm)	61 LEDs/ft (200 LEDs/m)	1800K	110.2	361.6	83.9	275.1	32.74 ft (9.98 m)	✓	n/a	n/a	n/a
			2000K	130.1	426.8	99	324.7					
			2200K	142.7	468.3	108.6	356.3					
			2400K	148.2	486.1	112.7	369.8					
			2700K	168	551.3	127.9	419.4					
			3000K	175.3	575	133.4	437.5					
			3500K	180.7	592.8	137.5	451					
			4000K	177.1	580.9	134.7	442					
			6000K	173.5	569	132	433					
3.0 Static White Xacta	0.2 in. (5 mm)	61 LEDs/ft (200 LEDs/m)	1800K	196.3	643.9	149.3	489.9	23.62 ft (7.2 m)	✓	n/a	n/a	n/a
			2000K	231.6	760	176.2	578.3					
			2200K	254.2	833.9	193.4	634.5					
			2400K	263.8	865.6	200.7	658.6					
			2700K	299.2	981.7	227.7	747					
			3000K	312.1	1023.9	237.4	779.1					
			3500K	321.7	1055.6	244.8	803.2					
			4000K	315.3	1034.5	239.9	787.1					
			6000K	308.9	1013.4	235	771.1					
4.5 Static White Xacta	0.2 in. (5 mm)	61 LEDs/ft (200 LEDs/m)	1800K	299.6	983	228	747.9	19.03 ft (5.8 m)	✓	n/a	n/a	n/a
			2000K	353.7	1160.3	269.1	882.8					
			2200K	388	1273.1	295.2	968.6					
			2400K	402.8	1321.4	306.5	1005.4					
			2700K	456.8	1498.7	347.6	1140.3					
			3000K	476.5	1563.1	362.5	1189.3					
			3500K	491.2	1611.5	373.7	1226.1					
			4000K	481.4	1579.2	366.3	1201.6					
			6000K	471.5	1547	358.8	1177.1					
1.5 Variable White Xacta	0.2 in. (5 mm)	122 LEDs/ft (400 LEDs/m)	2400K 6000K	189.1	620.4	143.9	472	32.15 ft (9.8 m)	✓	n/a	n/a	n/a
3.0 Variable White Xacta	0.2 in. (5 mm)	122 LEDs/ft (400 LEDs/m)	2400K 6000K	371.1	1217.7	282.4	926.5	22.31 ft (6.8 m)	✓	n/a	n/a	n/a
4.5 Variable White Xacta	0.2 in. (5 mm)	122 LEDs/ft (400 LEDs/m)	2400K 6000K	524.2	1719.8	398.9	1308.5	19.03 ft (5.8 m)	✓	n/a	n/a	n/a
1.0 Variable White Series 2	1.97 in. (50 mm)	42 LEDs/ft (140 LEDs/m)	2000K 6500K	79	259	64	209	32.8 ft (10 m)	✓	✓		
3.0 Variable White Series 2	1.97 in. (50 mm)	42 LEDs/ft (140 LEDs/m)	2000K 6500K	223	732	180	591	32.8 ft (10 m)	✓	✓		
6.0 Variable White Series 2	1.97 in. (50 mm)	42 LEDs/ft (140 LEDs/m)	2000K 6500K	419	1373	337.5	1107	19 ft 8 in. (6 m)	✓	✓		

DIODE VISIBILITY CHART (Data below applies to installations with Milky lens only)

 No Visible Diode = N Note: Linea RibbonLyte has no visible diode		 With Visible Diode = Y	
Static White and Static Color Series 2		Static White and Variable White Xacta	
0.75/1.5/2.2/3.0/4.4		1.5/3.0/4.5	
IP20/IP65		IP20/IP65	
N		N	
Variable White Series 2		Variable White Series 2	
1.0/3.0/6.0		1.0/3.0/6.0	
IP20/IP65		IP20/IP65	
N		N	

AVAILABLE DRIVERS / CONTROLLERS AND DIMMING OPTIONS / WIRE GAUGE CHART

0-10V/ELV/MLV 3-IN-1	ELV	0-10V VW/WD	COMPACT
			
60W, 96W, 288W 0-10V/ELV/MLV 3-in-1 Dimmable Drivers Part No.: • DRVW2460TRI010 (60 W) • DRVW2496TRI010 (96 W) • DRVW24288TRI010 (288 W) 24 VDC 120-277 VAC IP65, dry/damp/wet locations UL Listed	60W Dimmable Driver Part No.: • DRVW2460ELV 24 VDC 100-130 VAC Fits in single-gang switch boxes IP20, dry locations UL Recognized	0-10V Dimmable 90W VW/WD Driver Part No.: • DRVRFWDVW2490120 24 VDC 100-277 VAC IP23, dry/damp locations UL Listed	60W, 96W Non-Dimming Compact Drivers Part No.: • DRV2460C (60 W) • DRV2496C (96 W) 24 VDC 120-277 VAC IP20, dry locations UL Class P

ATHENA WIRELESS COMPATIBLE	CASAMBI COMPATIBLE DRIVERS	DIMMABLE DALI-2 DRIVERS	DIMMABLE DALI-2 DRIVERS
			
94W Athena Wireless Compatible Drivers Part No.: • DRVW2494ATH1CH (1 channel) • DRVW2494ATH2CH (2 channel) 24 VDC 100-277 VAC Dry locations UL Listed	100W & 200W Casambi Compatible 4 Channel Drivers Part No.: • DRVW24100CAS4CH (100 W) • DRVW24200CAS4CH (200 W) 24 VDC 100-277 VAC IP66, dry/damp/wet locations UL Listed, CE, RoHS, Bluetooth, CASAMBI	96W DIMMABLE DALI-2 DT6 D4I & DALI-2 DT8 D4I DRIVERS Part No.: • DRVW2496DALI1CH (1 channel) • DRVW2496DALI2CH (2 channel) 24-26 VDC 120-277 VAC IP67, dry/damp/wet locations UL Listed	75W, 150W, 240W DALI-2 Dimmable Drivers Part No.: • DRVW2475DALI1CH (75 W, 1 channel) • DRVW24150DALI1CH (150 W, 1 channel) • DRVW24240DALI1CH (240 W, 1 channel) • DRV24150DALI2CH (150 W, 2 channels) • DRV24150DALI4CH (150 W, 4 channels) 24 VDC 120-277 VAC IP67, damp/wet locations (1-channel drivers only) IP20, dry location (2-channel & 4-channel drivers only) CE, RoHS, SELV

DMX CONTROLLERS, VARIABLE WHITE DIMMER, WARM DIM DIMMER - FOR COLOR CHANGING FIXTURES


				
GLASS TOUCH WALL CONTROLLERS Part No.: • AWCRCBWWBK • AWCVWBK	1 ZONE WALL CONTROLLER Part No.: DMXCTRLG	5 ZONE WALL CONTROLLER Part No.: DMXCTRL	10 ZONE WALL CONTROLLER Part No.: DMXCTRLD	6 UNIVERSE DMX CONTROLLER Part No.: DMXCTRLDR6U
				
VARIABLE WHITE DIMMER Part No.: • RFDIMVWWH (White) • RFDIMVWBK (Black)	WARM DIM DIMMER Part No.: • RFDIMVDWH (White) • RFDIMVDBK (Black)	4 CHANNEL WATERPROOF DMX INTERFACE Part No.: DMXINFWLC4D	5 CHANNEL DMX DECODER Part No.: DMXINF5	DMX OPTO SPLITTER Part No.: DMXOS8

DRIVER AND RIBBONLYTE AT FULL LOAD


Wattages	30		60		96		150		200		240		300		320	
Wire Gauge	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
24 AWG / 0.25 mm ²	14	4.27	9	2.74	5.5	1.68	3.75	1.14	2.75	0.84	2.25	0.69	1.75	0.53	1.75	0.53
22 AWG / 0.34 mm ²	22	6.71	14	4.27	9	2.74	5.75	1.75	4.5	1.37	3.5	1.07	2.75	0.84	2.75	0.84
20 AWG / 0.5 mm ²	35	10.67	23	7.01	14	4.27	9	2.74	7	2.13	5.75	1.75	4.5	1.37	4.25	1.30
18 AWG / 0.75 mm ²	56	17.07	37	11.28	23	7.01	15	4.57	11	3.35	9	2.74	7.5	2.29	7	2.13
16 AWG / 1.5 mm ²	90	27.44	60	18.29	37	11.28	24	7.32	18	5.49	15	4.57	12	3.66	11	3.35
14 AWG / 2.5 mm ²	142	43.29	95	28.96	59	17.99	38	11.59	28	8.54	23	7.01	19	5.79	17	5.18
12 AWG / 4 mm ²	226	68.90	151	46.04	94	28.66	60	18.29	45	13.72	37	11.28	30	9.15	28	8.54
10 AWG / 6 mm ²	360	109.76	240	73.17	150	45.73	96	29.27	72	21.95	60	18.29	48	14.63	45	13.72
8 AWG / 10 mm ²	574	175.00	381	116.16	239	72.87	153	46.65	115	35.06	95	28.96	76	23.17	71	21.65

WIRING DIAGRAMS - STATIC WHITE / STATIC COLOR / RGBW / RGBA / RGBWW


0-10 V

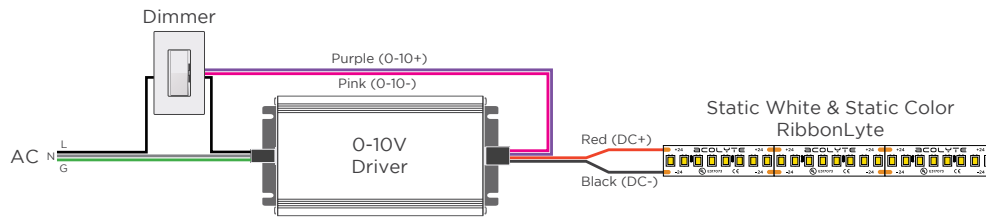


MLV / ELV

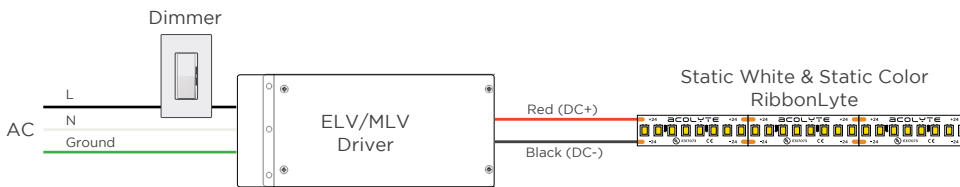


DMX WIRING WITH STATIC WHITE & STATIC COLOR RIBBONLYTE

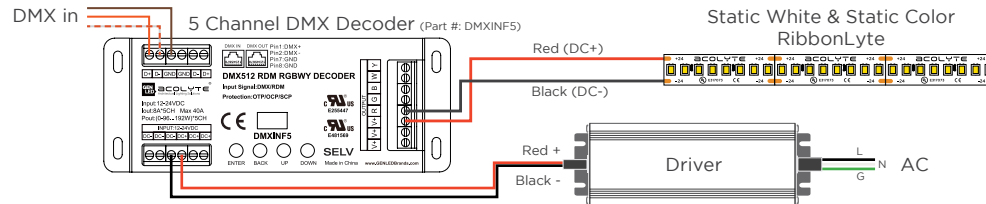


DALI-2 WIRING WITH STATIC WHITE & STATIC COLOR RIBBONLYTE

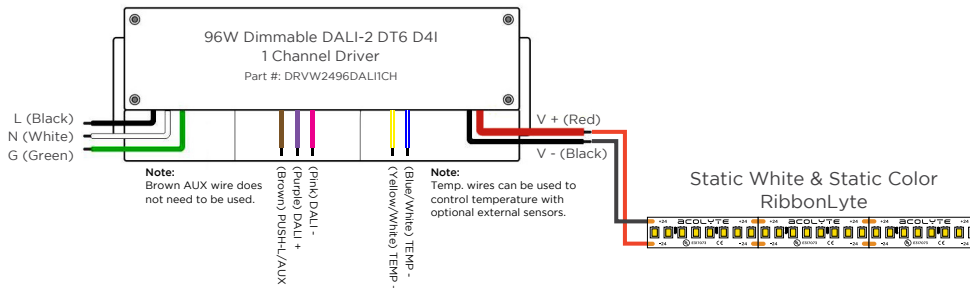

STATIC WHITE & STATIC COLOR RIBBONLYTE WIRING WITH ATHENA WIRELESS COMPATIBLE DRIVER

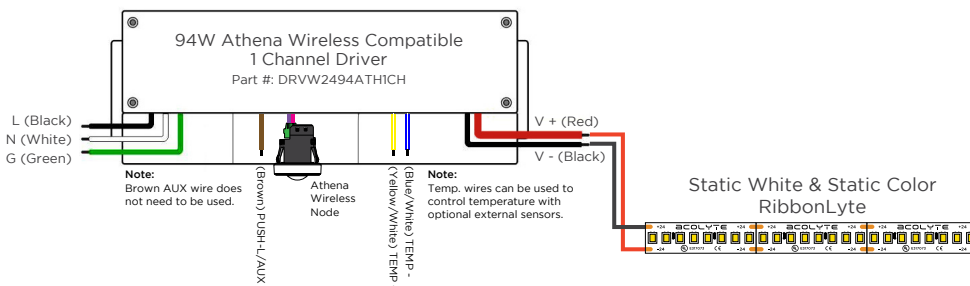

DMX WITH RGBWW 5-IN-1 RIBBONLYTE

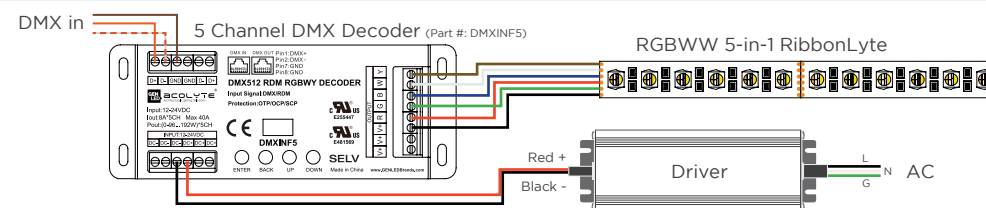

WIRE COLORS PER RIBBONLYTE COLOR

STATIC WHITE + STATIC COLOR

Red Wire (+) Positive
Black Wire (-) Negative

RGBW + RGBA


Red Wire (+) Positive
Green Wire (-) goes to Green Channel
Red Wire (-) goes to Red Channel
Blue Wire (-) goes to Blue Channel
White Wire (-) goes to White Channel

RGBWW

Black (+) Positive
Green Wire (-) goes to Green Channel
Red Wire (-) goes to Red Channel
Blue Wire (-) goes to Blue Channel
White Wire (-) goes to White Channel 1
Brown Wire (-) goes to White Channel 2

WIRING DIAGRAMS - VARIABLE WHITE

2-CHANNEL VARIABLE WHITE DIMMING

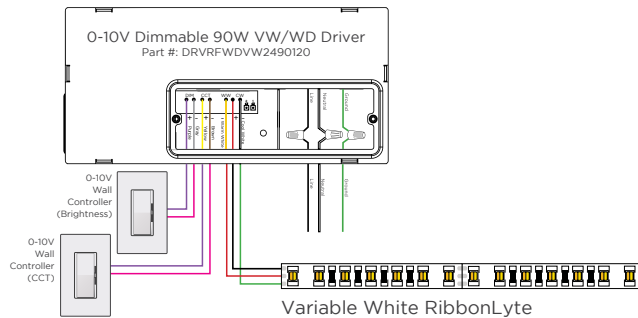


WIRE COLORS PER RIBBONLYTE COLOR


VARIABLE WHITE

Black Wire (+) Positive
Red Wire (-) goes to Warm White Channel
Green Wire (-) goes to Cool White Channel


DMX WIRING WITH VARIABLE WHITE RIBBONLYTE

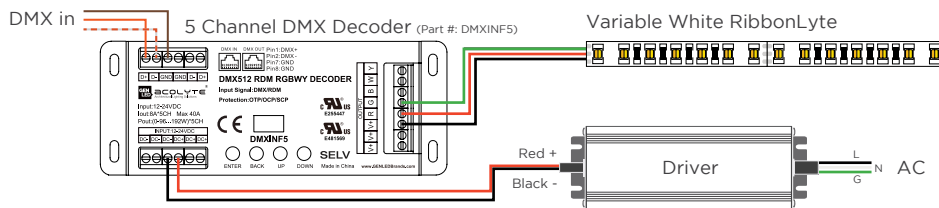

DALI-2 WIRING WITH VARIABLE WHITE RIBBONLYTE

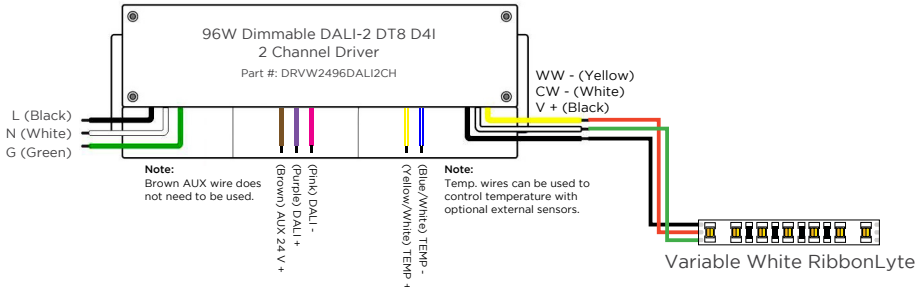

VARIABLE WHITE RIBBONLYTE WIRING WITH ATHENA WIRELESS COMPATIBLE DRIVER

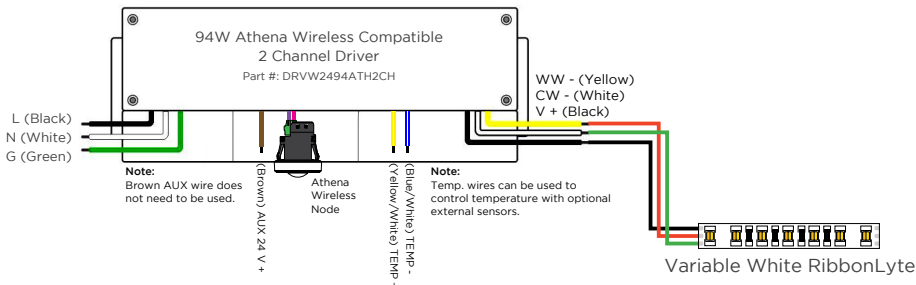

REV.25JUN2026

GLOBAL HQ

320 Murray Hill Pkwy
East Rutherford, NJ 07073
U.S.
T: (+1) 212 629 6830
E: Sales-US@GENLEDBrands.com

EUROPEAN HQ

Hogeweyselaan 119
1382 JK Weesp
Netherlands
T: (+31) 346 235 000
E: SalesEurope@GENLEDBrands.com

MEINA HQ

PO Box 371378, #823, Building 4EA
Dubai Airport Free Zone
Dubai, UAE
T: (+971) 4 701 7901
E: SalesMEINA@genlebrands.com

ASIA-PACIFIC HQ

Room 402, Building D
Shenxi Tongchuang Science and Technology Park
No. 16 Hongyin Road
Xingqiang Community, Xinhua Street
Guangming District, Shenzhen, China 518107
T: (+86) 755 8529 0710
E: Sales-Pacific@GENLEDBrands.com