


AS16 CHANNEL FIXTURE

The new AS16 is a surface mounted channel with an economical profile that comes with clear, milky and black lens options. With a beam angle of 110 degrees, the AS16 fits LED strips with a maximum width of up to .63 in. (16 mm).

- Available for field assembly or factory assembly
- 0.74 in. (18.8 mm) wide by 0.73 in. (18.6 mm) deep
- Beam Angle 110°
- Wattage Range from 0.75 W/ft (2.46 W/m) to 8.8 W/ft (28.86 W/m)
- Static White delivered lumen range from 44 lm/ft (145 lm/m) up to 737 lm/ft (2417 lm/m)
- Clear Lens, Milky Lens or Black Lens

HOUSING FINISHES



*Additional fee applies

LENS FINISHES



**Our black lens offers great diffusion and helps hide fixtures that aren't in use.

AVAILABLE COLORS & COLOR TEMPERATURES





DIMENSIONS


AS16 Channel	Mounting Clip (included accessory)
Width: 0.74 in. (18.8 mm) Height: 0.73 in. (18.6 mm) Internal Width: 0.65 in. (16.4 mm) Internal Height: 0.63 in. (16 mm)	Material: stainless steel Side View Width: 0.79 in. (20 mm) Length: 0.98 in. (25 mm) Top View Assembled View Option 1: 0.86 in. (21.8 mm) Option 2: 0.77 in. (19.6 mm) Width: 0.79 in. (20 mm) Height (option 1): 0.86 in. (21.8 mm) Height (option 2): 0.77 in. (19.6 mm) Note: 1. Magnetic mounting option available (see page 2) 2. Exterior channel applications should be securely attached to the mounting surface with appropriate screws and/or liquid nails. Acolyte strongly recommends field assembly for exterior applications. Use mounting clips for interior applications only.

SPECIFICATIONS

Beam Angle	110°
Lens Type	Clear Lens, Milky Lens, Black Lens
Length	Channel is sold by the foot and cut to your exact desired length. Required amount of mounting clips included.
Operating Voltage	24 V
Dimming	MLV / 0-10 Volt / ELV / DALI / DMX / CASAMBI
Operating Temperature	-40 — 158 °F (-40 — 70 °C)
Colors	1800K, 2000K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 6000K, Red, Amber, Green, Blue, RGBA, RGBW, RGBWW, VW, Warm Dim (1800K, 2000K, 2200K, Pixel RGB only available in IP20)
CRI	90+ CRI (for Static White LEDs only)
Lamp Life	L70 at 50,000 hours
MacAdam ellipse (SDCM)	1-Step Binning (for Static White LEDs only)
Certifications	UL Listed UL 2108 Issued: 2004/02/27 Ed: 1 Rev: 2014/02/24 Low Voltage Lighting Systems CSA C22.2#9.0 Issued: 1996/06/01 Ed: 1 (R2011) General Requirements for Luminaries; with Gen. Inst. 1: 1997, Gen Inst. 2: 1998. ROHS compliant

ACCESSORIES (SEE PART NUMBERS AT STEP 4 ON PAGE 3)

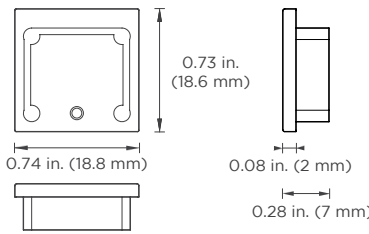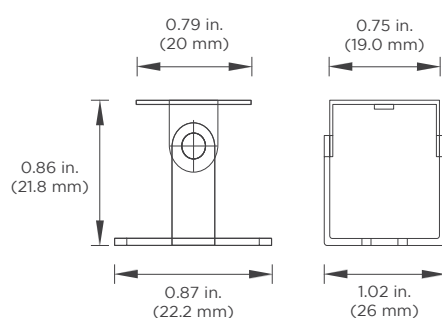End Caps	Tilttable Stand (Part #: TILTSTANDST)
Material: ABS 	 Assembled Height with Channel (Option 1): 1.72 in. (43.6 mm) Assembled Height with Channel (Option 2): 1.63 in. (41.4 mm)

Magnetic Mount (Part #: CHMAG0.5)				
	Side View  0.125 in. (3.175 mm) 0.5 in. (12.7 mm)	Top View  Ø 0.2 in. (5.08 mm)	Assembled View  0.98 in. (25 mm)	Features: - High-energy neodymium magnets come attached to mounting clips with countersink hex nuts - Create easy-mount magnetic channels with minimal surface gaps; no tools or drilling necessary - Magnets rated for 8 lbs. of pull force with static load Applications: - Industrial lighting retrofits for troffers and other metal fixtures - Metal retail shelf lighting - Temporary light fixture installations

ORDERING GUIDE

STEP 1 Complete Channel Part Number

CHANNEL	LENS	HOUSING COLOR
CHAS16		
CHAS16 - AS16 Channel	C - Clear Lens BK - Black Lens M - Milky Lens	SV - Silver WH - White* BK - Black* ** Additional fee applies Consult factory for custom colors

STEP 2 Complete RibbonLyte Part Number

CATEGORY	CRI	RIBBON TYPE & IP RATING
RB		
RB - RibbonLyte	0 - Static Color, Color Changing 90 - 90+ CRI Static White	SWS220 - Static White Series 2 IP20 LINEA20 - Linea RibbonLyte IP20 VWS220 - VW Series 2 IP20 SWS265 - Static White Series 2 IP65 RGBWS220 - RGBW Series 2 IP20 VWS265 - VW Series 2 IP65 SWS268 - Static White Series 2 IP68 RGBWS265 - RGBW Series 2 IP65 VWS268 - VW Series 2 IP68 SWS269 - Static White Series 2 IP69 RGBWW20 - RGBWW 5-in-1 IP20 VWS269 - VW Series 2 IP69 SCS220 - Static Color Series 2 IP20 WD20 - Warm Dim IP20 XACTA20 - Xacta RibbonLyte IP20 SCS265 - Static Color Series 2 IP65 WD65 - Warm Dim IP65 RGBADD - Pixel RGB IP20 SCS268 - Static Color Series 2 IP68 WD68 - Warm Dim IP68 SCS269 - Static Color Series 2 IP69 WD69 - Warm Dim IP69

NOTE: To ensure waterproofing standards are met, IP65, IP68 and IP69 RibbonLyte can NOT be cut in the field.

WATTAGE

0.75 - 0.75 W/ft (2.46 W/m - Static White, Static Color)
1.0 - 1.0 W/ft (3.3 W/m - Variable White)
1.5 - 1.5 W/ft (4.9 W/m - Static White, Static Color, Variable White)
2.2 - 2.2 W/ft (7.2 W/m - Static White, Static Color)
2.4 - 2.4 W/ft (8 W/m - Static White Linea)
3.0 - 3.0 W/ft (9.8 W/m - Static White, Static Color, Variable White)
4.3 - 4.3 W/ft (14 W/m - Static White Linea)
4.4 - 4.4 W/ft (14.4 W/m - Static White, Static Color, RGBW, RGBWW, RGBA)
4.5 - 4.5 W/ft (14.8 W/m - Static White, Variable White)
5.0 - 5.0 W/ft (16.4 W/m - Static White, Static Color)
5.2 - 5.2 W/ft (17.1 W/m - Warm Dim)
5.5 - 5.5 W/ft (18.0 W/m - RGBW, RGBA)
6.0 - 6.0 W/ft (19.7 W/m - Static White, Static Color, Variable White)
6.1 - 6.1 W/ft (20 W/m - Variable White Linea, Pixel)
8.8 - 8.8 W/ft (28.9 W/m - RGBW, RGBWW)


COLOR

18 - 1800K **RGB27** - Red, Green, Blue + 2700K
20 - 2000K **RGB30** - Red, Green, Blue + 3000K
22 - 2200K **RGB40** - Red, Green, Blue + 4000K
24 - 2400K **RGB2465** - Red, Green, Blue + 2400K + 6500K
27 - 2700K **RGBA** - Red, Green, Blue + Amber
30 - 3000K **RGBS** - Pixel RGB (SPI)
35 - 3500K **VW** - Variable White 2000K-6500K
40 - 4000K **VW1833** - Variable White 1800K-3300K (IP20)
60 - 6000K **2920** - Warm Dim 2900K-2000K (IP20)
R - Red **1830** - Warm Dim 3000K-1800K (IP20)
A - Amber **2721** - Warm Dim 2700K-2100K (IP65/IP68/IP69)
G - Green **Z** - Undecided (For quotes only. Must be chosen before final order.)
B - Blue

CONNECTION OPTIONS (See diagrams on the right)

- | | |
|------------------------------------|-------------------------------------|
| 1 - End Feed Bare Wire Connection | 4 - End Feed with IP67 Male Coupler |
| 2 - Back Feed Bare Wire Connection | 5 - Soldered Daisy Chain |
| 3 - Side Feed Bare Wire Connection | 6 - Daisy Chain With IP67 Couplers |

Custom Length (ft.)

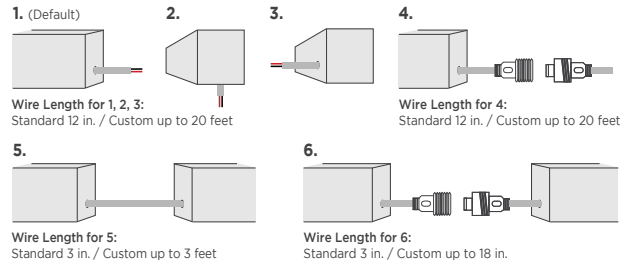

STEP 3 Complete Assembly Option & Length

ASSEMBLY OPTION **LENGTH** (Standard factory assembled length up to 6 ft 6.7 in. / 2 m)

- FI - Field Assembly
FA - Factory Assembly** (not recommended for exterior applications)


** Factory assembled runs exceeding 6 ft 6.7 in. (2 m) will be split into multiple daisy chained fixtures.

STEP 4 Add Accessories

ACCESSORIES

TILTSTANDST - Tiltable Stand CHMAGO.5 - Magnetic Mount

DO NOT BUTT END CAPS AGAINST EACH OTHER WHEN CREATING LONGER FIXTURES
Acolyte STRONGLY SUGGESTS field assembly (without using interior end caps) for direct-view fixtures of more than 6 ft 6.7 in. (2 m) in length. Field assembly without interior end caps will eliminate gaps or dead spots that can be caused by butting interior end caps against each other.

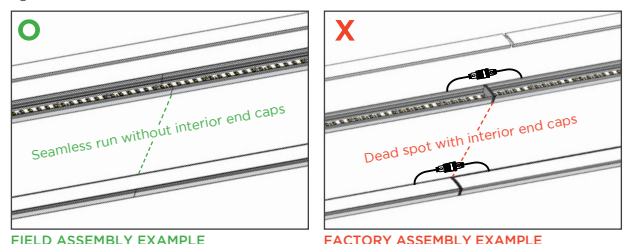

RIBBONLYTE SPECIFICATIONS & COMPATIBILITY

Available Wattages	Incremental Length	LED Pitch	CCTs	Delivered Lumens with Clear Lens		Delivered Lumens with Milky Lens		Delivered Lumens with Black Lens		Max Length	Compatible with Channel			
				lm/ft	lm/m	lm/ft	lm/m	lm/ft	lm/m		IP20	IP65	IP68	IP69
0.75 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	1800K	59	192	47	155	44	145	IP20: 49 ft (15 m) IP65/ IP68/ IP69: 32.8 ft (10 m)	✓	✓	✓	✓
			2000K	69	227	56	183	52	171					
			2200K	76	249	61	201	57	188					
			2400K	79	259	64	209	59	195					
			2700K	86	281	69	227	65	212					
			3000K	86	281	69	227	65	212					
			3500K	91	297	73	240	68	224					
			4000K	93	307	75	247	70	231					
1.5 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	6000K	91	300	74	242	69	226	IP20: 49 ft (15 m) IP65/ IP68/ IP69: 32.8 ft (10 m)	✓	✓	✓	✓
			1800K	117	384	95	310	88	289					
			2000K	137	384	110	263	103	338					
			2200K	152	499	123	402	114	375					
			2400K	158	517	127	417	119	389					
			2700K	172	563	138	454	129	424					
			3000K	172	563	138	454	129	424					
			3500K	180	590	145	476	135	444					
2.2 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	4000K	187	613	151	495	141	462	IP20: 42 ft (12.8 m) IP65/ IP68/ IP69: 32.8 ft (10 m)	✓	✓	✓	✓
			6000K	183	600	147	484	138	451					
			1800K	170	557	137	449	128	419					
			2000K	196	644	158	520	148	485					
			2200K	217	712	175	574	163	536					
			2400K	227	745	183	601	171	561					
			2700K	246	806	198	650	185	606					
			3000K	250	819	201	660	188	616					
3.0 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	3500K	260	852	210	687	196	642	IP20: 36 ft (11 m) IP65/ IP68/ IP69: 32.8 ft (10 m)	✓	✓	✓	✓
			4000K	272	893	219	720	205	672					
			6000K	262	859	211	693	197	647					
			1800K	234	769	189	620	176	579					
			2000K	273	897	221	723	206	675					
			2200K	301	989	243	797	227	744					
			2400K	306	1005	247	811	231	756					
			2700K	343	1125	277	907	258	847					
4.4 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	3000K	363	1190	293	960	273	896	28 ft 4 in. (8.64 m) 				

RIBBONLYTE SPECIFICATIONS & COMPATIBILITY

Available Wattages	Incremental Length	LED Pitch	Color & CCTs	Delivered Lumens with Clear Lens		Delivered Lumens with Milky Lens		Delivered Lumens with Black Lens		Max Length	Compatible with Channel			
				lm/ft	lm/m	lm/ft	lm/m	lm/ft	lm/m		IP20	IP65	IP68	IP69
0.75 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	29	94	23	76	22	71	22				
			Green	122	400	98	323	92	301	92	✓	✓	✓	✓
			Blue	13	43	11	35	10	33	10				
			Amber	24	78	19	63	18	59	18				
1.5 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	59	192	47	155	44	145	44				
			Green	223	732	180	591	168	551	168	✓	✓	✓	✓
			Blue	25	82	20	66	19	62	19				
			Amber	47	156	38	128	36	117	36				
2.2 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	86	282	69	227	65	212	65				
			Green	297	973	239	785	223	733	223	✓	✓	✓	✓
			Blue	37	121	30	97	28	91	28				
			Amber	70	228	56	184	52	172	52				
3.0 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	112	366	90	295	84	276	84				
			Green	354	1162	286	937	267	875	267	✓	✓	✓	✓
			Blue	70	229	56	185	53	172	53				
			Amber	81	265	65	214	61	200	61				
4.4 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	155	510	125	411	117	384	117				
			Green	479	1571	386	1267	360	1182	360	✓	✓	✓	✓
			Blue	98	322	79	260	74	243	74				
			Amber	102	336	83	271	77	253	77				
5.0 Static Color Series 2	1.4 in. (35.7 mm)	68 LEDs/ft (224 LEDs/m)	Red	172	564	139	455	130	425	130				
			Green	539	1770	435	1427	406	1332	406	✓	✓	✓	✓
			Blue	112	366	90	295	84	276	84				
			Amber	121	397	98	320	91	299	91				
6.0 Static Color Series 2	1.4 in. (35.7 mm)	68 LEDs/ft (224 LEDs/m)	Red	206	677	167	546	155	510	155				
			Green	631	2069	509	1668	475	1557	475	✓	✓	✓	✓
			Blue	128	421	104	340	97	317	97				
			Amber	134	439	108	354	101	331	101				
2.4 Static White Linea	1.97 in. (50 mm)	146 LEDs/ft (480 LEDs/m)	2700K	149.7	491	120.8	396	112.7	369.6	112.7				
			3000K	158.1	519.9	127.5	419.3	119	391.3	119	✓	n/a	n/a	n/a
			3500K	185.1	608.2	149.3	490.5	139.3	457.8	139.3				
			4000K	185.1	608.2	149.3	490.5	139.3	457.8	139.3				
3.0 Static White Linea	1.97 in. (50 mm)	146 LEDs/ft (480 LEDs/m)	2700K	184.1	604.5	148.5	487.5	138.6	455	138.6				
			3000K	203.7	668.7	164.3	539.3	153.3	503.3	153.3	✓	n/a	n/a	n/a
			3500K	217.6	714.2	175.5	576	163.8	537.6	163.8				
			4000K	231.6	759.8	186.8	612.8	174.3	571.9	174.3				
4.3 Static White Linea	1.97 in. (50 mm)	146 LEDs/ft (480 LEDs/m)	2700K	300.4	983.9	242.3	793.5	226.1	740.6	226.1				
			3000K	311.6	1023	251.3	825	234.5	770	234.5	✓	n/a	n/a	n/a
			3500K	344.1	1129	277.5	910.5	259	849.8	259				
			4000K	344.1	1129	277.5	910.5	259	849.8	259				
6.1 Variable White Linea	1.09 in. (27.78 mm)	175 LEDs/ft (576 LEDs/m)	2700K + 6500K	539.4	1769	435	427.3	406	332.1	406	✓	n/a	n/a	n/a

RIBBONLYTE SPECIFICATIONS & COMPATIBILITY

Available Wattages	Incremental Length	LED Pitch	Color & CCTs	Delivered Lumens						Max Length	Compatible with Channel			
				with Clear Lens		with Milky Lens		with Black Lens			IP20	IP65	IP68	IP69
				lm/ft	lm/m	lm/ft	lm/m	lm/ft	lm/m					
1.5 Static White Xacta	0.2 in. (5 mm)	61 LEDs/ft (200 LEDs/m)	1800K	110.2	361.6	83.9	275.1	83.9	275.1	32.74 ft (9.98 m)	✓	n/a	n/a	n/a
			2000K	130.1	426.8	99	324.7	99	324.7					
			2200K	142.7	468.3	108.6	356.3	108.6	356.3					
			2400K	148.2	486.1	112.7	369.8	112.7	369.8					
			2700K	168	551.3	127.9	419.4	127.9	419.4					
			3000K	175.3	575	133.4	437.5	133.4	437.5					
			3500K	180.7	592.8	137.5	451	137.5	451					
			4000K	177.1	580.9	134.7	442	134.7	442					
			6000K	173.5	569	132	433	132	433					
3.0 Static White Xacta	0.2 in. (5 mm)	61 LEDs/ft (200 LEDs/m)	1800K	196.3	643.9	149.3	489.9	149.3	489.9	23.62 ft (7.2 m)	✓	n/a	n/a	n/a
			2000K	231.6	760	176.2	578.3	176.2	578.3					
			2200K	254.2	833.9	193.4	634.5	193.4	634.5					
			2400K	263.8	865.6	200.7	658.6	200.7	658.6					
			2700K	299.2	981.7	227.7	747	227.7	747					
			3000K	312.1	1023.9	237.4	779.1	237.4	779.1					
			3500K	321.7	1055.6	244.8	803.2	244.8	803.2					
			4000K	315.3	1034.5	239.9	787.1	239.9	787.1					
			6000K	308.9	1013.4	235	771.1	235	771.1					
4.5 Static White Xacta	0.2 in. (5 mm)	61 LEDs/ft (200 LEDs/m)	1800K	299.6	983	228	747.9	228	747.9	19.03 ft (5.8 m)	✓	n/a	n/a	n/a
			2000K	353.7	1160.3	269.1	882.8	269.1	882.8					
			2200K	388	1273.1	295.2	968.6	295.2	968.6					
			2400K	402.8	1321.4	306.5	1005.4	306.5	1005.4					
			2700K	456.8	1498.7	347.6	1140.3	347.6	1140.3					
			3000K	476.5	1563.1	362.5	1189.3	362.5	1189.3					
			3500K	491.2	1611.5	373.7	1226.1	373.7	1226.1					
			4000K	481.4	1579.2	366.3	1201.6	366.3	1201.6					
			6000K	471.5	1547	358.8	1177.1	358.8	1177.1					
1.5 Variable White Xacta	0.2 in. (5 mm)	122 LEDs/ft (400 LEDs/m)	2400K + 6000K	189.06	620.36	143.85	472.01	143.9	472.0	32.15 ft (9.8 m)	✓	n/a	n/a	n/a
3.0 Variable White Xacta	0.2 in. (5 mm)	122 LEDs/ft (400 LEDs/m)	2400K + 6000K	371.13	1217.71	282.38	926.52	282.4	926.5	22.31 ft (6.8 m)	✓	n/a	n/a	n/a
4.5 Variable White Xacta	0.2 in. (5 mm)	122 LEDs/ft (400 LEDs/m)	2400K + 6000K	524.22	1719.76	398.86	1308.51	398.9	1308.5	19.03 ft (5.8 m)	✓	n/a	n/a	n/a
1.0 Variable White Series 2	1.97 in. (50 mm)	42 LEDs/ft (140 LEDs/m)	2000K + 6500K	79	259	64	209	60	195	32.8 ft (10 m)	✓	✓	✓	✓
3.0 Variable White Series 2	1.97 in. (50 mm)	42 LEDs/ft (140 LEDs/m)	2000K + 6500K	223	732	180	591	168	551	32.8 ft (10 m)	✓	✓	✓	✓
6.0 Variable White Series 2	1.97 in. (50 mm)	42 LEDs/ft (140 LEDs/m)	2000K + 6500K	419	1373	338	1107	315	1033	19 ft 8 in. (6 m)	✓	✓	✓	✓
4.4 RGBW Series 2	1.97 in. (50 mm)	36 LEDs/ft (120 LEDs/m)	RGBW (all on)	188.1	617.2	148.5	487.2	138.6	454.7	19 ft 8 in. (6 m)	✓	n/a	n/a	n/a
5.5 RGBW Series 2	1.97 in. (50 mm)	36 LEDs/ft (120 LEDs/m)	RGBW (all on)	308.8	1013	243.3	798.5	227.2	745.3	IP65: 16 ft 4 in. (5 m) IP68: 19 ft 7.9 in. (6 m)	n/a	✓		
8.8 RGBW Series 2	1.97 in. (50 mm)	36 LEDs/ft (120 LEDs/m)	RGBW (all on)	510.2	1673.8	402.6	1320.9	375.8	1232.9	16 ft 4 in. (5 m)	✓	n/a	n/a	n/a
4.4 5-in-1 RGBWW	2.46 in. (62.5 mm)	29 LED/ft (96 LED/m)	RGBWW (all on)	241.4	792.1	194.7	638.8	181.7	308	16 ft 4 in (5 m)	✓	n/a	n/a	
8.8 5-in-1 RGBWW	2.46 in. (62.5 mm)	29 LED/ft (96 LED/m)	RGBWW	409.2	1342.6	330	1082.7	596.2	1010.5	11 ft 6 in (3.5 m)	✓	n/a	n/a	n/a
6.1 Pixel RGB	3.94 in. (100 mm)	18 LEDs/ft (60 LEDs/m)	RGB (all on)	115.785	379.44	93.375	306	87.15	285.6	24 ft 7.2 in. (7.5 m)	✓	n/a	n/a	n/a
5.2 Warm Dim	3.94 in. (100 mm)	36 LEDs/ft (120 LEDs/m)	WARM DIM	266	873	200	657	200	657	16 ft 4 in. (5 m)	✓	✓	✓	✓

DIODE VISIBILITY CHART (Data below applies to installations with Milky lens only)


 No Visible Diode = N Note: Linea RibbonLyte has no visible diode				 With Visible Diode = Y					
Static White & Static Color Series 2 0.75/1.5/2.2/3.0/4.4/5.0/6.0	Static White & Static Color Xacta 1.5/3.0/4.5	RGBW & RGBA Series 2		5-in-1 RGBWW 4.4	5-in-1 RGBWW 8.8	Pixel RGB 6.1	Variable White Series 2 1.0/3.0/6.0	Warm Dim 5.2	
IP20/IP65/IP68/IP69	IP20	IP20	IP65	IP20	IP20	IP20	IP20/IP65/IP68/IP69	IP20/IP65/IP68/IP69	
N	N	Y	Y	Y	Y	Y	N	N	

AVAILABLE DRIVERS / CONTROLLERS AND DIMMING OPTIONS / WIRE GAUGE CHART

0-10V/ELV/MLV 3-IN-1	ELV	0-10V VW/WD	COMPACT
			
60W, 96W, 288W 0-10V/ELV/MLV 3-in-1 Dimmable Drivers Part No.: • DRVW2460TRI010 (60 W) • DRVW2496TRI010 (96 W) • DRVW24288TRI010 (288 W) 24 VDC 120-277 VAC IP65, dry/damp/wet locations UL Listed	60W Dimmable Driver Part No.: • DRVW2460ELV 24 VDC 100-130 VAC Fits in single-gang switch boxes IP20, dry locations UL Recognized	0-10V Dimmable 90W VW/WD Driver Part No.: • DRVRFWDVW2490120 24 VDC 100-277 VAC IP23, dry/damp locations UL Listed	60W, 96W Non-Dimming Compact Drivers Part No.: • DRV2460C (60 W) • DRV2496C (96 W) 24 VDC 120-277 VAC IP20, dry locations UL Class P

ATHENA WIRELESS COMPATIBLE	CASAMBI COMPATIBLE DRIVERS	DIMMABLE DALI-2 DRIVERS	DIMMABLE DALI-2 DRIVERS
			
94W Athena Wireless Compatible Drivers Part No.: • DRVW2494ATH1CH (1 channel) • DRVW2494ATH2CH (2 channel) 24 VDC 100-277 VAC Dry locations UL Listed	100W & 200W Casambi Compatible 4 Channel Drivers Part No.: • DRVW24100CAS4CH (100 W) • DRVW24200CAS4CH (200 W) 24 VDC 100-277 VAC IP66, dry/damp/wet locations UL Listed, CE, RoHS, Bluetooth, CASAMBI	96W DIMMABLE DALI-2 DT6 D4I & DALI-2 DT8 D4I DRIVERS Part No.: • DRVW2496DALI1CH (1 channel) • DRVW2496DALI2CH (2 channel) 24-26 VDC 120-277 VAC IP67, dry/damp/wet locations UL Listed	75W, 150W, 240W DALI-2 Dimmable Drivers Part No.: • DRVW2475DALI1CH (75 W, 1 channel) • DRVW24150DALI1CH (150 W, 1 channel) • DRVW24240DALI1CH (240 W, 1 channel) • DRV24150DALI2CH (150 W, 2 channels) • DRV24150DALI4CH (150 W, 4 channels) 24 VDC 120-277 VAC IP67, damp/wet locations (1-channel drivers only) IP20, dry location (2-channel & 4-channel drivers only) CE, RoHS, SELV

DMX CONTROLLERS, VARIABLE WHITE DIMMER, WARM DIM DIMMER - FOR COLOR CHANGING FIXTURES


				
GLASS TOUCH WALL CONTROLLERS Part No.: • AWCRCBWWBK • AWCWBK	1 ZONE WALL CONTROLLER Part No.: DMXCTRLG	5 ZONE WALL CONTROLLER Part No.: DMXCTRL	10 ZONE WALL CONTROLLER Part No.: DMXCTRLD	6 UNIVERSE DMX CONTROLLER Part No.: DMXCTRLDR6U
				
VARIABLE WHITE DIMMER Part No.: • RFDIMVWWH (White) • RFDIMVWBK (Black)	WARM DIM DIMMER Part No.: • RFDIMVDWH (White) • RFDIMVDBK (Black)	4 CHANNEL WATERPROOF DMX INTERFACE Part No.: DMXINFWLC4D	5 CHANNEL DMX DECODER Part No.: DMXINF5	DMX OPTO SPLITTER Part No.: DMXOS8

DRIVER AND RIBBONLYTE AT FULL LOAD


Wattages	30		60		96		150		200		240		300		320	
Wire Gauge	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
24 AWG / 0.25 mm ²	14	4.27	9	2.74	5.5	1.68	3.75	1.14	2.75	0.84	2.25	0.69	1.75	0.53	1.75	0.53
22 AWG / 0.34 mm ²	22	6.71	14	4.27	9	2.74	5.75	1.75	4.5	1.37	3.5	1.07	2.75	0.84	2.75	0.84
20 AWG / 0.5 mm ²	35	10.67	23	7.01	14	4.27	9	2.74	7	2.13	5.75	1.75	4.5	1.37	4.25	1.30
18 AWG / 0.75 mm ²	56	17.07	37	11.28	23	7.01	15	4.57	11	3.35	9	2.74	7.5	2.29	7	2.13
16 AWG / 1.5 mm ²	90	27.44	60	18.29	37	11.28	24	7.32	18	5.49	15	4.57	12	3.66	11	3.35
14 AWG / 2.5 mm ²	142	43.29	95	28.96	59	17.99	38	11.59	28	8.54	23	7.01	19	5.79	17	5.18
12 AWG / 4 mm ²	226	68.90	151	46.04	94	28.66	60	18.29	45	13.72	37	11.28	30	9.15	28	8.54
10 AWG / 6 mm ²	360	109.76	240	73.17	150	45.73	96	29.27	72	21.95	60	18.29	48	14.63	45	13.72
8 AWG / 10 mm ²	574	175.00	381	116.16	239	72.87	153	46.65	115	35.06	95	28.96	76	23.17	71	21.65

WIRING DIAGRAMS - STATIC WHITE / STATIC COLOR / RGBW / RGBA / RGBWW


0-10 V

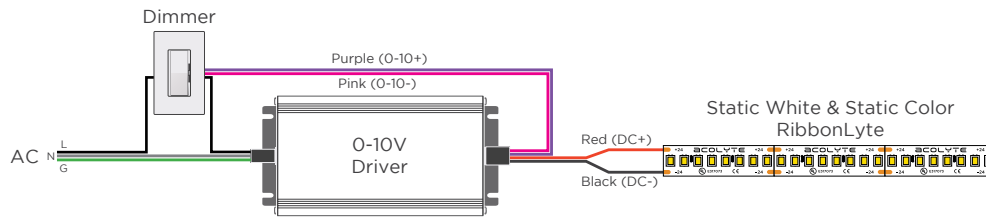


MLV / ELV

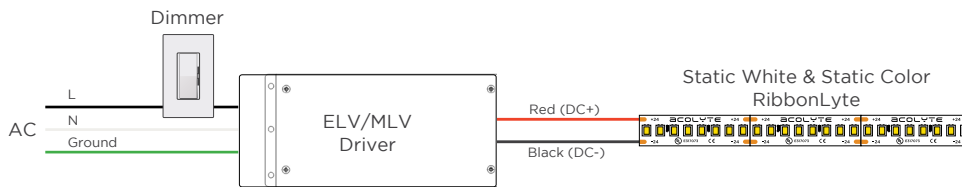


DMX WIRING WITH STATIC WHITE & STATIC COLOR RIBBONLYTE

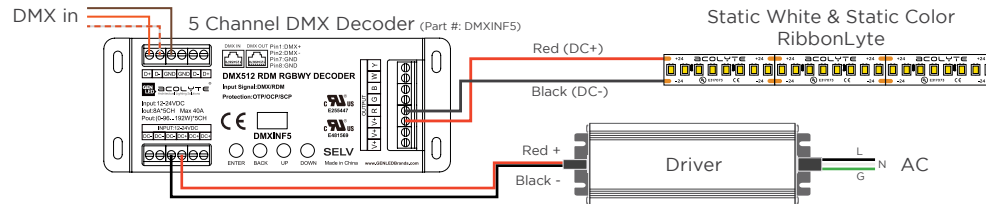


DALI-2 WIRING WITH STATIC WHITE & STATIC COLOR RIBBONLYTE

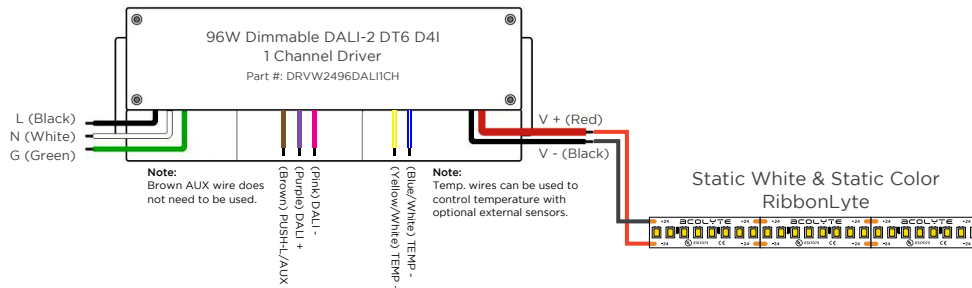

STATIC WHITE & STATIC COLOR RIBBONLYTE WIRING WITH ATHENA WIRELESS COMPATIBLE DRIVER

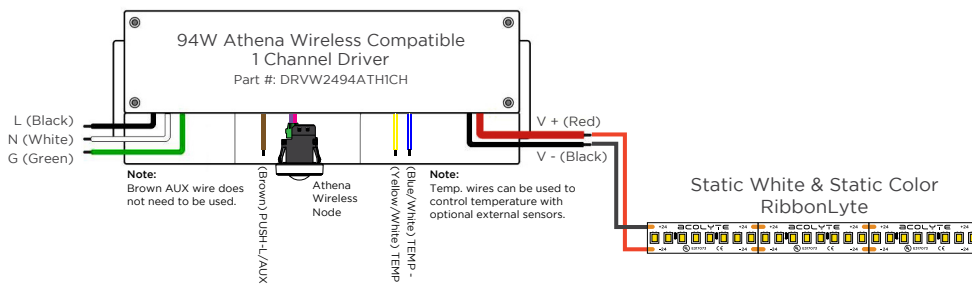

DMX WITH RGBWW 5-IN-1 RIBBONLYTE

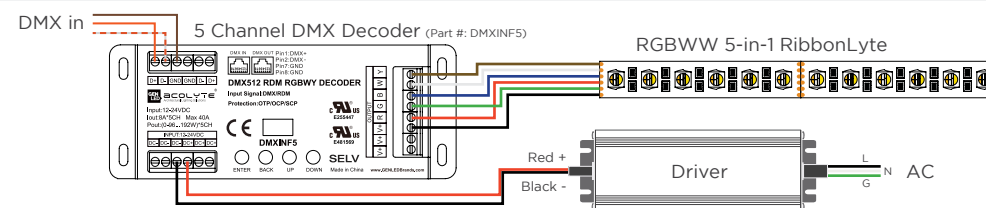

WIRE COLORS PER RIBBONLYTE COLOR

STATIC WHITE + STATIC COLOR

Red Wire (+) Positive
Black Wire (-) Negative

RGBW + RGBA


Red Wire (+) Positive
Green Wire (-) goes to Green Channel
Red Wire (-) goes to Red Channel
Blue Wire (-) goes to Blue Channel
White Wire (-) goes to White Channel

RGBWW

Black (+) Positive
Green Wire (-) goes to Green Channel
Red Wire (-) goes to Red Channel
Blue Wire (-) goes to Blue Channel
White Wire (-) goes to White Channel 1
Brown Wire (-) goes to White Channel 2

WIRING DIAGRAMS - VARIABLE WHITE

2-CHANNEL VARIABLE WHITE DIMMING

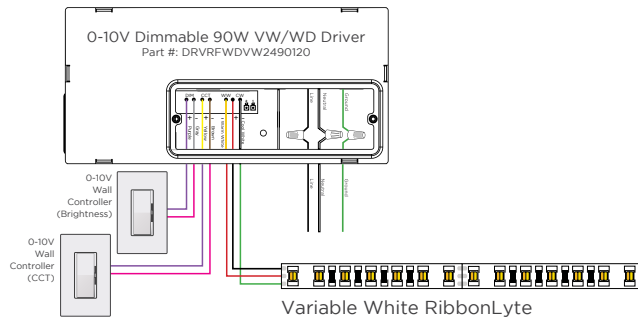


WIRE COLORS PER RIBBONLYTE COLOR


VARIABLE WHITE

Black Wire (+) Positive
Red Wire (-) goes to Warm White Channel
Green Wire (-) goes to Cool White Channel


DMX WIRING WITH VARIABLE WHITE RIBBONLYTE

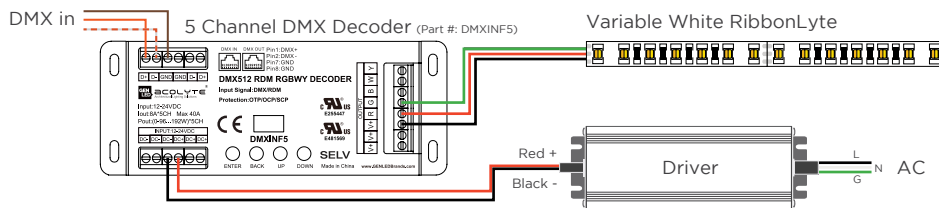

DALI-2 WIRING WITH VARIABLE WHITE RIBBONLYTE

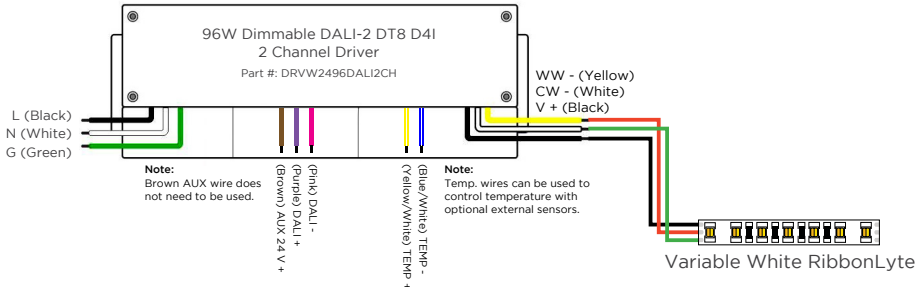

VARIABLE WHITE RIBBONLYTE WIRING WITH ATHENA WIRELESS COMPATIBLE DRIVER

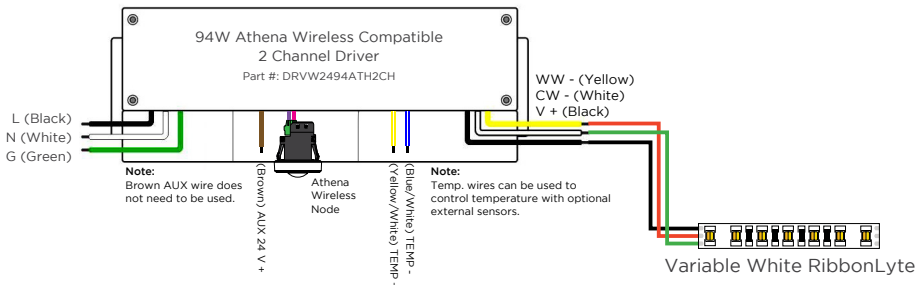

REV.25JUN2026

GLOBAL HQ

320 Murray Hill Pkwy
East Rutherford, NJ 07073
U.S.
T: (+1) 212 629 6830
E: Sales-US@GENLEDBrands.com

EUROPEAN HQ

Hogeweyselaan 119
1382 JK Weesp
Netherlands
T: (+31) 346 235 000
E: SalesEurope@GENLEDBrands.com

MEINA HQ

PO Box 371378, #823, Building 4EA
Dubai Airport Free Zone
Dubai, UAE
T: (+971) 4 701 7901
E: SalesMEINA@genledbrands.com

ASIA-PACIFIC HQ

Room 402, Building D
Shensi Tongchuang Science and Technology Park
No. 16 Hongyin Road
Xingqiang Community, Xinhua Street
Guangming District, Shenzhen, China 518107
T: (+86) 755 8529 0710
E: Sales-Pacific@GENLEDBrands.com