


SIMPLY CLEAN™ RECESSED FIXTURE SC3

Made from aluminum, UV-resistant and available in any length, Simply Clean™ SC3 recessed fixtures offer a variety of mounting options. Our smallest Simply Clean™ channel, SC3 has a 90° beam angle and can be installed in walls and ceilings or along a ceiling edge. Design a custom fixture with Simply Clean™ channels and RibbonLyte products.

- Mud-in fixture
- Sold by the foot. Factory or field cuttable to any length.
- Adds an element of style and design to existing spaces
- Aluminum channel with UV resistant lens
- Assembled in USA
- For interior applications only

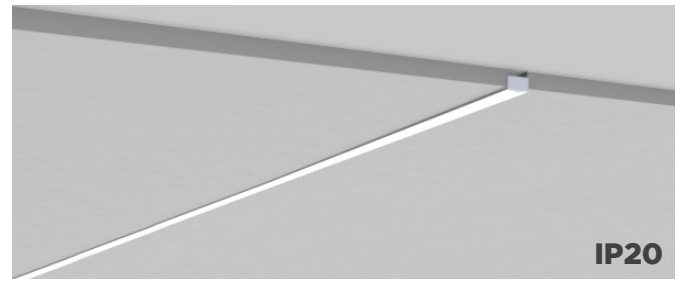

RoHS

Declare.



HOUSING FINISH



Silver

AVAILABLE LENS FINISHES




Milky Lens
70% Light Transmission

AVAILABLE COLORS & COLOR TEMPERATURES



DIMENSIONS

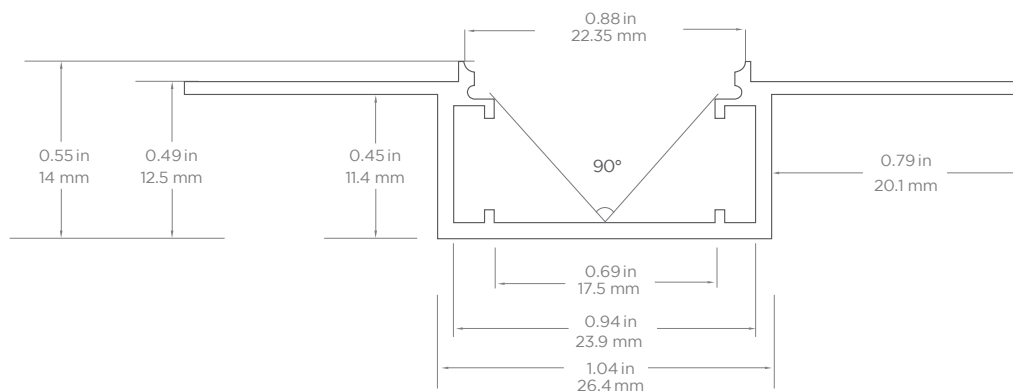

Visible Width: 0.88 in. (22.35 mm)
Height: 0.55 in. (14 mm)
Internal Width: 0.69 in. (17.5 mm)

Note: This channel does not require mounting clips. Please see our installation guide for instructions.

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.


SPECIFICATIONS

Beam Angle	90°
Lens Type	Milky Lens
Length	Channel is sold by the foot and cut to your exact desired length
Operating Voltage	24 V
Dimming	MLV / 0-10 Volt / ELV / DALI / DMX / CASAMBI
Operating Temperature	-40 — 158 °F (-40 — 70 °C)
Colors	1800K, 2000K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 6000K, Red, Amber, Green, Blue, Pixel RGB, RGBW Addressable RGBA, RGBW, RGBWW, VW, Warm Dim (1800K, 2000K, 2200K, Pixel RGB only available in IP20)
CRI	90+ CRI (for Static White LEDs only)
Lamp Life	L70 at 50,000 hours
MacAdam ellipse (SDCM)	1-Step Binning (for Static White LEDs only)
Certifications	UL Listed UL 2108 Issued: 2004/02/27 Ed: 1 Rev: 2014/02/24 Low Voltage Lighting Systems CSA C22.2#9.0 Issued: 1996/06/01 Ed: 1 (R2011) General Requirements for Luminaries; with Gen. Inst. 1: 1997, Gen Inst. 2: 1998. ROHS compliant
Recessed Cutout Width	1.04 in. (26.4 mm)
Depth In Wall	0.45 in. (11.4 mm)
Length	Sold by the foot. Factory cuttable to any length. Max individual length of each piece is 78.7" (2m), but the fixture can be installed end-to-end to create long continuous recessed fixtures.
Visible Lens Width	0.88 in. / 22.35 mm


ACCESSORIES

End Cap


Material: ABS

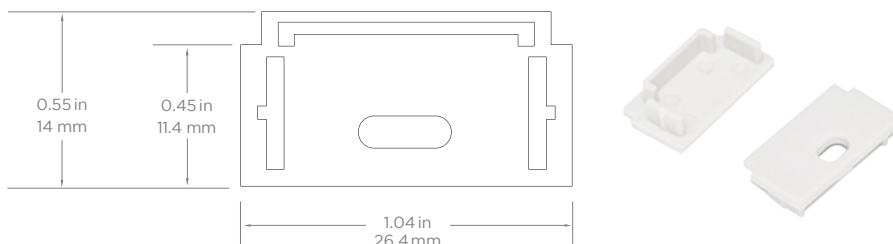

Exploded View

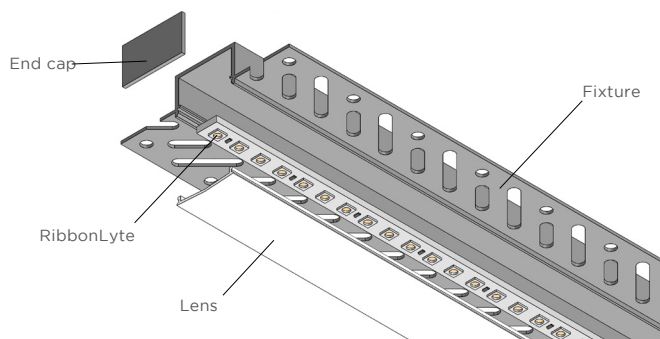

End View

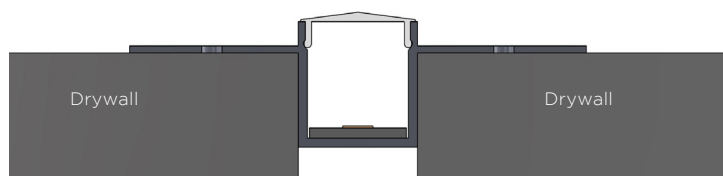

See basic installation steps on page 6.

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

STEP 1 Complete Channel Part Number

CHANNEL	LENS	HOUSING COLOR
CHSC3	M	SV
CHSC3 - Simply Clean™ SC3 Recessed Fixture	M - Milky Lens	SV - Silver (default)


CATEGORY	CRI	RIBBON TYPE & IP RATING		
RB				
RB - RibbonLyte	0 - Static Color, Color Changing	SWS220 - Static White Series 2 IP20	RGBWW20 - RGBWW 5-in-1 IP20	RGBWADD - Addressable RGBW IP67
		SWS265 - Static White Series 2 IP65	RGBWS220 - RGBW Series 2 IP20	RGBADD - Pixel RGB IP20
	90 - 90+ CRI Static White	SWS268 - Static White Series 2 IP68	RGBWS265 - RGBW Series 2 IP65	WD20 - Warm Dim IP20
		SWS269 - Static White Series 2 IP69	RGBWS268 - RGBW Series 2 IP68	WD65 - Warm Dim IP65
		SCS220 - Static Color Series 2 IP20	RGBWS269 - RGBW Series 2 IP69	WD68 - Warm Dim IP68
		SCS265 - Static Color Series 2 IP65	VWS220 - VW Series 2 IP20	WD69 - Warm Dim IP69
		SCS268 - Static Color Series 2 IP68	VWS265 - VW Series 2 IP65	XACTA20 - Xacta RibbonLyte IP20
		SCS269 - Static Color Series 2 IP69	VWS268 - VW Series 2 IP68	
		LINEA20 - Linea RibbonLyte IP20	VWS269 - VW Series 2 IP69	

NOTE: To ensure waterproofing standards are met, IP65, IP68 and IP69 RibbonLyte can NOT be cut in the field.

WATTAGE	COLOR
0.75 - 0.75 W/ft (2.46 W/m - Static White, Static Color)	18 - 1800K
1.0 - 1.0 W/ft (3.3 W/m - Variable White)	20 - 2000K
1.5 - 1.5 W/ft (4.9 W/m - Static White, Static Color)	22 - 2200K
2.2 - 2.2 W/ft (7.2 W/m - Static White, Static Color)	24 - 2400K
2.4 - 2.4 W/ft (8 W/m - Static White Linea)	27 - 2700K
3.0 - 3.0 W/ft (9.8 W/m - Static White, Static Color, Variable White)	30 - 3000K
4.3 - 4.3 W/ft (14 W/m - Static White Linea)	35 - 3500K
4.4 - 4.4 W/ft (14.4 W/m - Static White, Static Color, RGBW, RGBWW, RGBA)	40 - 4000K
5.2 - 5.2 W/ft (17.1 W/m - Warm Dim)	60 - 6000K
5.0 - 5.0 W/ft (16.4 W/m - Static White, Static Color)	R - Red
5.5 - 5.5 W/ft (18.0 W/m - RGBW, RGBA)	A - Amber
6.0 - 6.0 W/ft (19.7 W/m - Static White, Static Color, Variable White, Addressable RGBW)	G - Green
6.1 - 6.1 W/ft (20 W/m - Variable White Linea, Pixel RGB)	B - Blue
8.8 - 8.8 W/ft (28.86 W/m - RGBW, RGBWW)	
	VW - Variable White 2000K-6500K
	VW1833 - Variable White 1800K-3300K (IP20)
	RGB27 - Red, Green, Blue + 2700K
	RGB30 - Red, Green, Blue + 3000K
	RGB40 - Red, Green, Blue + 4000K
	RGB2465 - Red, Green, Blue + 2400K + 6500K
	RGBA - Red, Green, Blue + Amber
	RGBW30 - RGB + 3000K Addressable
	RGBW40 - RGB + 4000K Addressable
	RGBW60 - RGB + 6000K Addressable
	RGBS - Pixel RGB (SPI)
	2920 - Warm Dim 2900K-2000K (IP20)
	1830 - Warm Dim 3000K-1800K (IP20)
	2721 - Warm Dim 2700K-2100K (IP65/IP68/IP69)
	Z - Undecided (For quotes only. Must be chosen before final order.)

CONNECTION OPTIONS (See diagrams on the right)

- | | |
|------------------------------------|-------------------------------------|
| 1 - End Feed Bare Wire Connection | 4 - End Feed with IP67 Male Coupler |
| 2 - Back Feed Bare Wire Connection | 5 - Soldered Daisy Chain |
| 3 - Side Feed Bare Wire Connection | 6 - Daisy Chain With IP67 Couplers |

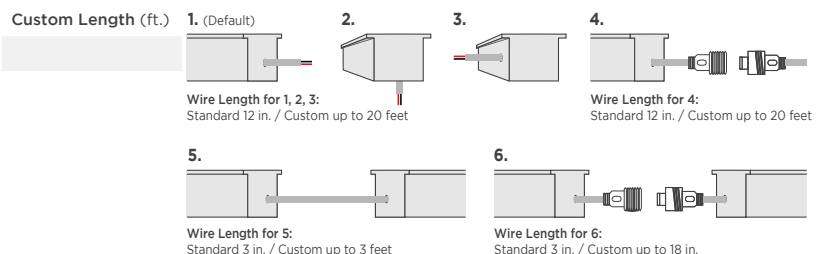

RIBBONLYTE SPECIFICATIONS & COMPATIBILITY

Available Wattages	Incremental Length	LED Pitch	CCT	Delivered Lumens with Milky Lens		Max Length	Compatible with Channel			
				lm/ft	lm/m		IP20	IP65	IP68	IP69
0.75 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	1800K	44.1	144.6	IP20: 49 ft (15 m) IP65: 32.8 ft (10 m)	✓	✓	✓	✓
			2000K	52	170.6					
			2200K	57.2	187.6					
			2400K	59.3	194.5					
			2700K	64.6	211.9					
			3000K	64.6	211.9					
			3500K	68.3	224					
			4000K	70.4	230.9					
			6000K	68.8	225.7					
			1800K	88.2	289.3					
			2000K	102.9	337.5					
			2200K	114.5	375.6					
			2400K	118.7	389.3					
			2700K	129.2	423.8					
			3000K	129.2	423.8					
			3500K	135.5	444.4					
1.5 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	4000K	140.7	461.5	IP20: 49 ft (15 m) IP65: 32.8 ft (10 m)	✓	✓	✓	✓
			6000K	137.6	451.3					
			1800K	127.8	419.2					
			2000K	147.8	484.8					
			2200K	163.2	535.3					
			2400K	170.9	560.6					
			2700K	184.8	606.1					
			3000K	187.9	616.3					
2.2 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	3500K	195.6	641.6	IP20: 42 ft (12.8 m) IP65: 32.8 ft (10 m)	✓	✓	✓	✓
			4000K	204.8	671.7					
			6000K	197.1	646.5					
			1800K	176.4	578.6					
			2000K	205.8	675					
			2200K	226.8	743.9					
			2400K	230.6	756.5					
			2700K	258.1	846.7					
3.0 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	3000K	273	895.3	IP20: 36 ft (11 m) IP65: 32.8 ft (10 m)	✓	✓	✓	✓
			3500K	279.3	916.1					
			4000K	279.3	916.1					
			6000K	266.6	874.5					
			1800K	249.5	818.3					
			2000K	292.6	959.7					
			2200K	323.4	1060.8					
			2400K	335.7	1101.2					
4.4 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	2700K	375.8	1232.5	28 ft 4 in. (8.64 m)	✓	✓	✓	✓
			3000K	397.3	1303.2					
			3500K	406.6	1333.5					
			4000K	406.6	1333.5					
			6000K	388.1	1272.9					
			1800K	290.5	952.8					
			2000K	343	1125					
			2200K	374.5	1228.4					
5.0 Static White Series 2	1.4 in. (35.7 mm)	68 LEDs/ft (224 LEDs/m)	2400K	384.4	1260.8	IP20: 33 ft 4 in. (10.1 m) IP65: 32.8 ft (10 m)	✓	✓	✓	✓
			2700K	430.2	1411.2					
			3000K	454.9	1492.1					
			3500K	465.5	1526.8					
			4000K	465.5	1526.8					
			6000K	444.3	1457.4					
			1800K	344.4	1129.6					
			2000K	399.0	1308.7					
6.0 Static White Series 2	1.4 in. (35.7 mm)	68 LEDs/ft (224 LEDs/m)	2200K	445.2	1460.3	28 ft (8.5 m)	✓	✓	✓	✓
			2400K	457.8	1501.6					
			2700K	512.4	1680.7					
			3000K	541.8	1777.1					
			3500K	554.4	1818.4					
			4000K	554.4	1818.4					
			6000K	529.2	1735.8					

SPECIFICATIONS

Available Wattages	Incremental Length	LED Pitch	Color & CCT	Delivered Lumens with Milky Lens		Max Length	Compatible with Channel			
				lm/ft	lm/m		IP20	IP65	IP68	IP69
0.75 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	22	70.6	IP20: 49 ft (15 m) IP65/IP68: 32.8 ft (10 m)	✓	✓	✓	✓
			Green	92	301.4					
			Blue	10	32.7					
			Amber	18	58.6					
1.5 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	44	144.7	IP20: 49 ft (15 m) IP65/IP68: 32.8 ft (10 m)	✓	✓	✓	✓
			Green	168	551.1					
			Blue	19	62					
			Amber	36	117.1					
2.2 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	65	212.2	IP20: 42 ft (12.8 m) IP65/IP68: 32.8 ft (10 m)	✓	✓	✓	✓
			Green	223	732.4					
			Blue	28	90.9					
			Amber	51	166.7					
3.0 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	84	275.52	32.8 ft (10 m)	✓	✓	✓	✓
			Green	266.7	874.78					
			Blue	52.5	172.2					
			Amber	60.9	199.75					
4.4 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	117	383.89	29 ft (8.8 m)	✓	✓	✓	✓
			Green	360.4	1181.98					
			Blue	73.9	242.46					
			Amber	77	252.56					
5.0 Static Color Series 2	1.4 in. (35.7 mm)	68 LEDs/ft (224 LEDs/m)	Red	129.5	424.76	30 ft (9.14 m)	✓	✓	✓	✓
			Green	406	1331.68					
			Blue	84	275.52					
			Amber	91	298.48					
6.0 Static Color Series 2	1.4 in. (35.7 mm)	68 LEDs/ft (224 LEDs/m)	Red	155.4	509.71	28 ft (8.5 m)	✓	✓	✓	✓
			Green	474.6	1556.6					
			Blue	96.6	316.9					
			Amber	100.8	330.7					
2.4 Static White Linea	1.97 in. (50 mm)	146 LEDs/ft (480 LEDs/m)	2700K	112.7	369.6	21.3 ft (6.5 m)	✓	n/a	n/a	n/a
			3000K	119	391.3					
			3500K	139.3	457.8					
			4000K	139.3	457.8					
3.0 Static White Linea	1.97 in. (50 mm)	146 LEDs/ft (480 LEDs/m)	2700K	138.6	455	21.3 ft (6.5 m)	✓	n/a	n/a	n/a
			3000K	153.3	503.3					
			3500K	163.8	537.6					
			4000K	174.3	571.9					
4.3 Static White Linea	1.97 in. (50 mm)	146 LEDs/ft (480 LEDs/m)	2700K	226.1	740.6	24.6 ft (7.5 m)	✓	n/a	n/a	n/a
			3000K	234.5	770					
			3500K	259	849.8					
			4000K	259	849.8					
6.1 Variable White Linea	1.09 in. (27.78 mm)	175 LEDs/ft (576 LEDs/m)	2700K + 6500K	406	1332.1	16.4 ft (5 m)	✓	n/a	n/a	n/a

SPECIFICATIONS

Available Wattages	Incremental Length	LED Pitch	Color & CCT	Delivered Lumens with Milky Lens		Max Length	Compatible with Channel			
				lm/ft	lm/m		IP20	IP65	IP68	IP69
1.5 Static White Xacta	0.2 in. (5 mm)	61 LEDs/ft (200 LEDs/m)	1800K	83.9	275.1	32.74 ft (9.98 m)	✓	n/a	n/a	n/a
			2000K	99	324.7					
			2200K	108.6	356.3					
			2400K	112.7	369.8					
			2700K	127.9	419.4					
			3000K	133.4	437.5					
			3500K	137.5	451					
			4000K	134.7	442					
			6000K	132	433					
3.0 Static White Xacta	0.2 in. (5 mm)	61 LEDs/ft (200 LEDs/m)	1800K	149.3	489.9	23.62 ft (7.2 m)	✓	n/a	n/a	n/a
			2000K	176.2	578.3					
			2200K	193.4	634.5					
			2400K	200.7	658.6					
			2700K	227.7	747					
			3000K	237.4	779.1					
			3500K	244.8	803.2					
			4000K	239.9	787.1					
			6000K	235	771.1					
4.5 Static White Xacta	0.2 in. (5 mm)	61 LEDs/ft (200 LEDs/m)	1800K	228	747.9	19.03 ft (5.8 m)	✓	n/a	n/a	n/a
			2000K	269.1	882.8					
			2200K	295.2	968.6					
			2400K	306.5	1005.4					
			2700K	347.6	1140.3					
			3000K	362.5	1189.3					
			3500K	373.7	1226.1					
			4000K	366.3	1201.6					
			6000K	358.8	1177.1					
1.5 Variable White Xacta	0.2 in. (5 mm)	122 LEDs/ft (400 LEDs/m)	2400K + 6000K	143.9	472	32.15 ft (9.8 m)	✓	n/a	n/a	n/a
3.0 Variable White Xacta	0.2 in. (5 mm)	122 LEDs/ft (400 LEDs/m)	2400K + 6000K	282.4	926.5	22.31 ft (6.8 m)	✓	n/a	n/a	n/a
4.5 Variable White Xacta	0.2 in. (5 mm)	122 LEDs/ft (400 LEDs/m)	2400K + 6000K	398.9	1308.5	19.03 ft (5.8 m)	✓	n/a	n/a	n/a
1.0 Variable White Series 2	1.97 in. (50 mm)	42 LEDs/ft (140 LEDs/m)	2000K + 6500K	60	200	32.8 ft (10 m)	✓	✓	✓	✓
3.0 Variable White Series 2	1.97 in. (50 mm)	42 LEDs/ft (140 LEDs/m)	2000K + 6500K	168	551.2	32.8 ft (10 m)	✓	✓	✓	✓
6.0 Variable White Series 2	1.97 in. (50 mm)	42 LEDs/ft (140 LEDs/m)	2000K + 6500K	315	1033.5	19 ft 8 in. (6 m)	✓	✓	✓	✓
4.4 RGBW Series 2	1.97 in. (50 mm)	36 LEDs/ft (120 LEDs/m)	RGBW	148.5	487.2	19 ft 8 in. (6 m) IP65: 16 ft 4 in. (5 m) IP68: 19 ft 7.9 in. (6 m)	✓	n/a	n/a	n/a
5.5 RGBW Series 2	1.97 in. (50 mm)	36 LEDs/ft (120 LEDs/m)	RGBW	243.3	798.5	16 ft 4 in. (5 m)	✓	n/a	n/a	n/a
8.8 RGBW Series 2	1.97 in. (50 mm)	36 LEDs/ft (120 LEDs/m)	RGBW	402.6	1320.9	16 ft 4 in. (5 m)	✓	n/a	n/a	n/a
4.4 5-in-1 RGBWW	2.46 in. (62.5 mm)	29 LED/ft (96 LED/m)	RGBWW	194.7	638.8	16 ft 4 in (5 m)	✓	n/a	n/a	✓
8.8 5-in-1 RGBWW	2.46 in. (62.5 mm)	29 LED/ft (96 LED/m)	RGBWW	330	1082.7	11 ft 6 in (3.5 m)	✓	n/a	n/a	n/a
RGBW Addressable	3.94 in. (100 mm)	18 LEDs/ft (60 LEDs/m)	Red	23.5	77.1	16 ft 5.64 in. (5.02 m)	n/a	n/a	✓ IP67	n/a
			Green	57.4	188.3					
			Blue	10.8	35.6					
			White	72.1	236.6					
6.1 Pixel RGB	3.94 in. (100 mm)	18 LEDs/ft (60 LEDs/m)	RGB (all on)	169.5	556.1	24 ft 7.2 in. (7.5 m)	✓	n/a	n/a	n/a
5.2 Warm Dim	3.94 in. (100 mm)	36 LEDs/ft (120 LEDs/m)	WARM DIM	201.6	661.5	16 ft 4 in. (5 m)	✓	✓	✓	✓

DIODE VISIBILITY CHART (Data below applies to installations with Milky lens only)

 No Visible Diode = N Note: Linea RibbonLyte has no visible diode				 With Visible Diode = Y					
Static White & Static Color Series 2	Static White & Static Color Xacta	RGBW & RGBA Series 2		5-in-1 RGBWW	5-in-1 RGBWW	Pixel RGB	RGBW Addressable	Variable White Series 2	Warm Dim
0.75/1.5/2.2/3.0/4.4/5.0/6.0	1.5/3.0/4.5	4.4/8.8	5.5	4.4	8.8	6.1	6.0	1.0/3.0/6.0	5.2
IP20/IP65/IP68/IP69	IP20	IP20	IP65/IP68/IP69	IP20	IP20	IP20	IP67	IP20/IP65/IP68/IP69	IP20/IP65/IP68/IP69
N	N	Y	Y	Y	Y	Y	Y	N	N

AVAILABLE DRIVERS / CONTROLLERS AND DIMMING OPTIONS / WIRE GAUGE CHART

0-10V/ELV/MLV 3-IN-1	ELV	0-10V VW/WD	COMPACT
			
60W, 96W, 288W 0-10V/ELV/MLV 3-in-1 Dimmable Drivers Part No.: • DRVW2460TRI010 (60 W) • DRVW2496TRI010 (96 W) • DRVW24288TRI010 (288 W) 24 VDC 120-277 VAC IP65, dry/damp/wet locations UL Listed	60W Dimmable Driver Part No.: • DRVW2460ELV 24 VDC 100-130 VAC Fits in single-gang switch boxes IP20, dry locations UL Recognized	0-10V Dimmable 90W VW/WD Driver Part No.: • DRVRFWDVW2490120 24 VDC 100-277 VAC IP23, dry/damp locations UL Listed	60W, 96W Non-Dimming Compact Drivers Part No.: • DRV2460C (60 W) • DRV2496C (96 W) 24 VDC 120-277 VAC IP20, dry locations UL Class P
ATHENA WIRELESS COMPATIBLE	CASAMBI COMPATIBLE DRIVERS	DIMMABLE DALI-2 DRIVERS	DIMMABLE DALI-2 DRIVERS
			
94W Athena Wireless Compatible Drivers Part No.: • DRVW2494ATH1CH (1 channel) • DRVW2494ATH2CH (2 channel) 24 VDC 100-277 VAC Dry locations UL Listed	100W & 200W Casambi Compatible 4 Channel Drivers Part No.: • DRVW24100CAS4CH (100 W) • DRVW24200CAS4CH (200 W) 24 VDC 100-277 VAC IP66, dry/damp/wet locations UL Listed, CE, RoHS, Bluetooth, CASAMBI	96W DIMMABLE DALI-2 DT6 D4I & DALI-2 DT8 D4I DRIVERS Part No.: • DRVW2496DALI1CH (1 channel) • DRVW2496DALI2CH (2 channel) 24-26 VDC 120-277 VAC IP67, dry/damp/wet locations UL Listed	75W, 150W, 240W DALI-2 Dimmable Drivers Part No.: • DRVW2475DALI1CH (75 W, 1 channel) • DRVW24150DALI1CH (150 W, 1 channel) • DRVW24240DALI1CH (240 W, 1 channel) • DRVW24150DALI2CH (150 W, 2 channels) • DRVW24150DALI4CH (150 W, 4 channels) 24 VDC 120-277 VAC IP67, damp/wet locations (1-channel drivers only) IP20, dry location (2-channel & 4-channel drivers only) CE, RoHS, SELV

DMX CONTROLLERS, VARIABLE WHITE DIMMER, WARM DIM DIMMER - FOR COLOR CHANGING FIXTURES


				
GLASS TOUCH WALL CONTROLLERS Part No.: • AWCRCBWWBK • AWCWVBK	1 ZONE WALL CONTROLLER Part No.: DMXCTRLG	5 ZONE WALL CONTROLLER Part No.: DMXCTRL	10 ZONE WALL CONTROLLER Part No.: DMXCTRLD	6 UNIVERSE DMX CONTROLLER Part No.: DMXCTRLDR6U
				
VARIABLE WHITE DIMMER Part No.: • RFDIMVVDWH (White) • RFDIMVVBK (Black)	WARM DIM DIMMER Part No.: • RFDIMVDWH (White) • RFDIMVDBK (Black)	4 CHANNEL WATERPROOF DMX INTERFACE Part No.: DMXINFWLC4D	5 CHANNEL DMX DECODER Part No.: DMXINF5	DMX OPTO SPLITTER Part No.: DMXOS8

DRIVER AND RIBBONLYTE AT FULL LOAD


Wattages	30		60		96		150		200		240		300		320	
Wire Gauge	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
24 AWG / 0.25 mm ²	14	4.27	9	2.74	5.5	1.68	3.75	1.14	2.75	0.84	2.25	0.69	1.75	0.53	1.75	0.53
22 AWG / 0.34 mm ²	22	6.71	14	4.27	9	2.74	5.75	1.75	4.5	1.37	3.5	1.07	2.75	0.84	2.75	0.84
20 AWG / 0.5 mm ²	35	10.67	23	7.01	14	4.27	9	2.74	7	2.13	5.75	1.75	4.5	1.37	4.25	1.30
18 AWG / 0.75 mm ²	56	17.07	37	11.28	23	7.01	15	4.57	11	3.35	9	2.74	7.5	2.29	7	2.13
16 AWG / 1.5 mm ²	90	27.44	60	18.29	37	11.28	24	7.32	18	5.49	15	4.57	12	3.66	11	3.35
14 AWG / 2.5 mm ²	142	43.29	95	28.96	59	17.99	38	11.59	28	8.54	23	7.01	19	5.79	17	5.18
12 AWG / 4 mm ²	226	68.90	151	46.04	94	28.66	60	18.29	45	13.72	37	11.28	30	9.15	28	8.54
10 AWG / 6 mm ²	360	109.76	240	73.17	150	45.73	96	29.27	72	21.95	60	18.29	48	14.63	45	13.72
8 AWG / 10 mm ²	574	175.00	381	116.16	239	72.87	153	46.65	115	35.06	95	28.96	76	23.17	71	21.65

WIRING DIAGRAMS - STATIC WHITE / STATIC COLOR / RGBW / RGBA / RGBWW


0-10 V

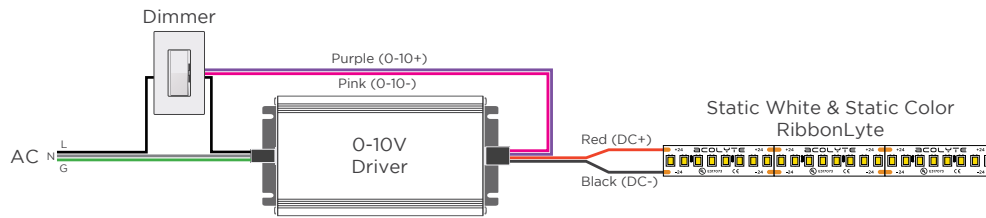


MLV / ELV

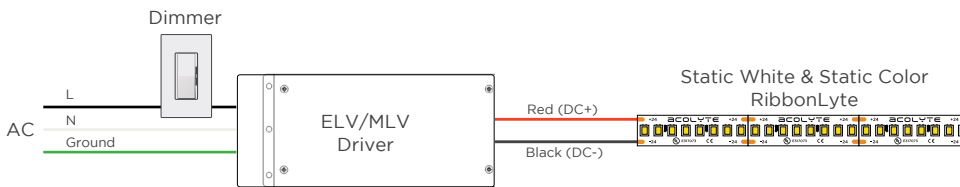


DMX WIRING WITH STATIC WHITE & STATIC COLOR RIBBONLYTE

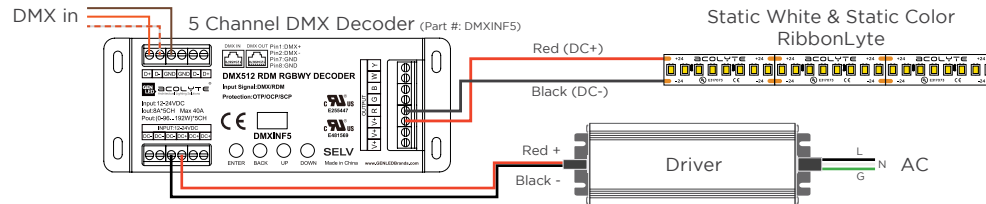


DALI-2 WIRING WITH STATIC WHITE & STATIC COLOR RIBBONLYTE

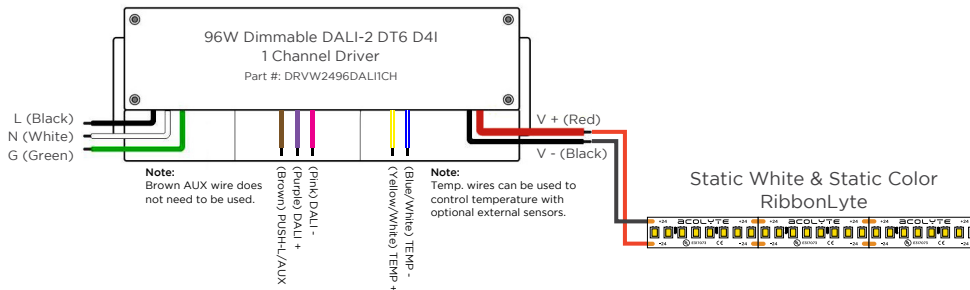

STATIC WHITE & STATIC COLOR RIBBONLYTE WIRING WITH ATHENA WIRELESS COMPATIBLE DRIVER

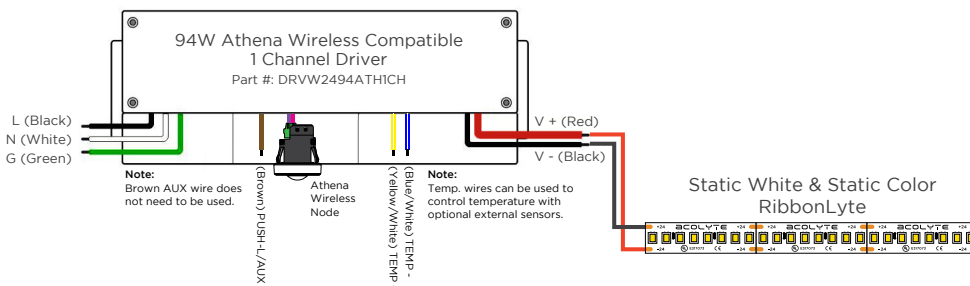

DMX WITH RGBWW 5-IN-1 RIBBONLYTE

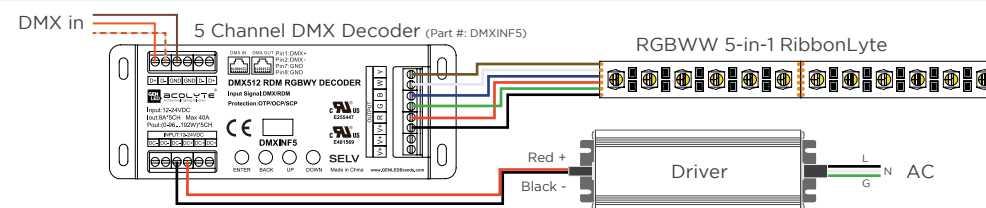

WIRE COLORS PER RIBBONLYTE COLOR

STATIC WHITE + STATIC COLOR

Red Wire (+) Positive
Black Wire (-) Negative

RGBW + RGBA


Black Wire (+) Positive
Green Wire (-) goes to Green Channel
Red Wire (-) goes to Red Channel
Blue Wire (-) goes to Blue Channel
White Wire (-) goes to White Channel

RGBWW

Black (+) Positive
Green Wire (-) goes to Green Channel
Red Wire (-) goes to Red Channel
Blue Wire (-) goes to Blue Channel
White Wire (-) goes to White Channel 1
Brown Wire (-) goes to White Channel 2

WIRING DIAGRAMS - VARIABLE WHITE

2-CHANNEL VARIABLE WHITE DIMMING

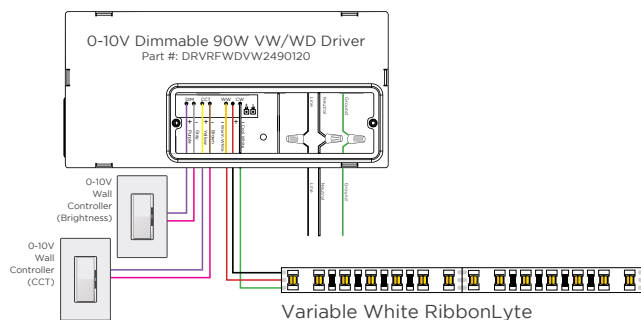


WIRE COLORS PER RIBBONLYTE COLOR


VARIABLE WHITE

Black Wire (+) Positive
Red Wire (-) goes to Warm White Channel
Green Wire (-) goes to Cool White Channel


DMX WIRING WITH VARIABLE WHITE RIBBONLYTE

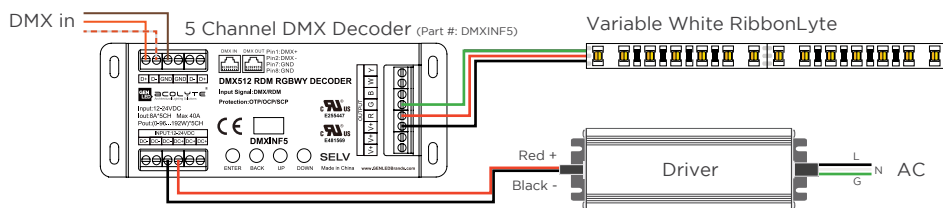

DALI-2 WIRING WITH VARIABLE WHITE RIBBONLYTE

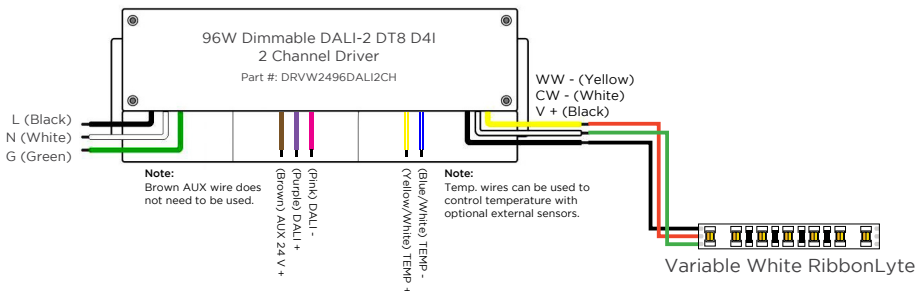

VARIABLE WHITE RIBBONLYTE WIRING WITH ATHENA WIRELESS COMPATIBLE DRIVER

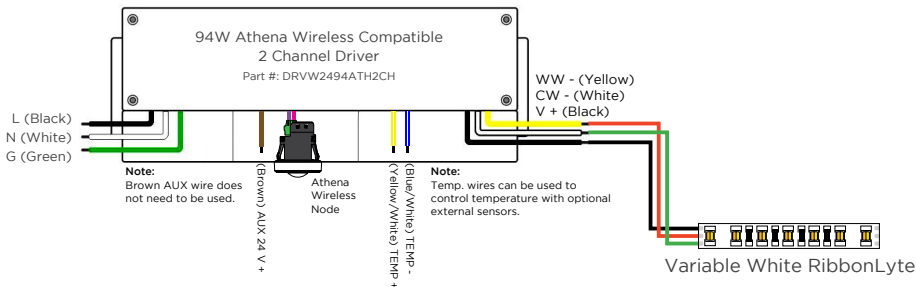

REV.27AUG2026

GLOBAL HQ

320 Murray Hill Pkwy
East Rutherford, NJ 07073
U.S.
T: (+1) 212 629 6830
E: Sales-US@GENLEDBrands.com

EUROPEAN HQ

Hogeweysesteen 119
1382 JK Weesp
Netherlands
T: (+31) 346 235 000
E: SalesEurope@GENLEDBrands.com

MEINA HQ

PO Box 371378, #823, Building 4EA
Dubai Airport Free Zone
Dubai, UAE
T: (+971) 4 701 7901
E: SalesMEINA@genledbrands.com

ASIA-PACIFIC HQ

Room 402, Building D
Shenxi Tongchuang Science and Technology Park
No. 16 Hongyin Road
Xingqiang Community, Xinhua Street
Guangming District, Shenzhen, China 518107
T: (+86) 755 8529 0710
E: Sales-Pacific@GENLEDBrands.com