



# ARMOR SERIES WALL GRAZERS & WASHERS


**AC MINI**  
(driver on board)



**Available Wattages / Lengths:**  
9W / 12.32 in. (313 mm)  
12W / 16.1 in. (410 mm)  
18W / 23.8 in. (605 mm)  
27W / 35.43 in. (900 mm)  
36W / 46.9 in. (1190 mm)

**Beam Angles:**  
10°x 10°, 20°x 20°, 25°x 25°, 50°x 50°, 10°x60°

**RGBW AC MINI**  
(driver on board)

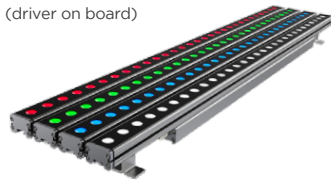

**Available Wattages / Lengths:**  
20W / 16.1 in. (410 mm)  
30W / 23.8 in. (605 mm)  
45W / 35.4 in. (900 mm)  
60W / 47.2 in. (1190 mm)

**Beam Angles:** 15°x 15°, 25°x 25°, 35°x 35°, 50°x 50°

**FORTE LINEAR**



**Available Wattages / Lengths:**  
33 W / 13 in. (330 mm)  
52 W / 23.6 in. (600 mm)  
84 W / 37.2 in. (945 mm)

**Available Beam Angles:**  
15°x 15°, 25°x 25°, 45°x45°, 70°x70°, 15°x45°

**FORTE LINEAR RGBW**



**Available Wattages / Lengths:**  
30W / 13 in. (330 mm)  
60W / 23.6 in. (600 mm)  
98W / 37.2 in. (945 mm)

**Available Beam Angles:**  
20°x 20°, 25°x 25°, 30°x30°, 40°x40°, 65°x65°, 20°x45°

**MINI**



**Available Wattages / Lengths:**

**U.S. Version:**  
6W / 8.5 in. (215 mm)  
12W / 16.1 in. (410 mm)  
18W / 23.8 in. (605 mm)  
36W / 46.9 in. (1190 mm)

**International Version:**  
5W / 7.3 in. (185 mm)  
15W / 19.7 in. (500 mm)  
30W / 39.4 in. (1000 mm)

**Available Beam Angles:**  
15°x 15°, 20°x 20°, 35°x 35°, 50°x 50°, 10x40°

**RGBW MINI**



**Available Wattages / Lengths:**

14W / 12.3 in. (313 mm)  
24W / 19.7 in. (500 mm)  
30W / 23.8 in. (605 mm)  
48W / 39.4 in. (1000 mm)  
60W / 47.2 in. (1190 mm)

**Available Beam Angles:**  
15°x 15°, 25°x 25°, 35°x 35°

**NANO**




**Available Wattages / Lengths:**


3W / 7.2 in. (182 mm)  
9W / 19.7 in. (500 mm)  
18W / 39.4 in. (1000 mm)

**Available Beam Angles:**  
30°x 30°, 55°x 55°, 25x35°


**AC MINI/MINI/NANO/FORTE**



**RGBW MINI & RGBW AC MINI**



**FORTE LINEAR RGBW**



**CERTIFICATIONS:**

**NANO, MINI, RGBW MINI:** **AC MINI, RGBW AC MINI:**



**FORTE**




**MOUNTING ACCESSORIES**

**Note:** Louvers and Glare Shield are available. See specification sheets for more details.



**SNAP-IN CLIP\***  
For narrow installations where mounting clips need to be installed first




**MOUNTING ARMS**  
Adjustable length between wall and fixture  
Small Mounting Arm: 6-9 in. (152-229 mm)  
Large Mounting Arm: 14-22 in. (356-559 mm)



**TILTABLE STAND\***  
For adjustable mounting angles up to 140°



**LARGE TILTABLE STAND\*\***  
For adjustable mounting angles up to 180°

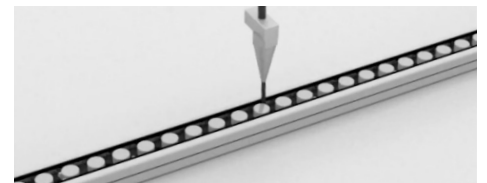

**All Armor Series Fixtures are Protected with our Proprietary Gel-Flush™ Technology:**

A special Dow Corning gel is injected throughout each fixture before we install the lens covers and end caps. The fixture is then set aside for a 24-hour curing period to seal the entire unit against the elements.