



# DIRECT AC RIBBONLYTE

COMMERCIAL | ENTERTAINMENT | HEALTHCARE | HOSPITALITY | MUSEUMS | PUBLIC SPACES | RESIDENTIAL | RETAIL

## STATIC WHITE



## STATIC COLOR



## RGB\*




\* RGB Direct AC Ribbonlyte is not compatible with mounting channels listed above.

## FEATURES



- Continuous run length:  
164 ft for Static Color & Static White models  
100 ft for RGB model
- No driver required
- ELV Dimmable for Static White and Static Color Models  
DMX Dimmable for RGB Model
- Direct Input 120V AC (US) or 230V AC (Worldwide)  
230V AC available only in Static White
- Factory cuttable lengths:  
4 in. / 101.6 mm (Static White)  
12 in. / 304.8 mm (Static Color)  
12 in. / 304.8 mm (RGB)
- IP65
- Perfect for interior and exterior applications such as coves, building facades, public spaces


### Direct AC Aluminum Channel

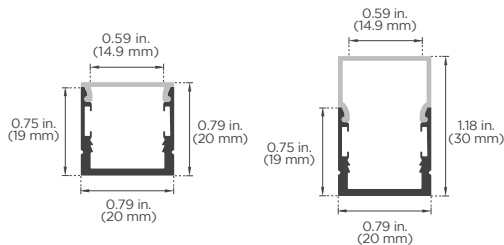

Flat Milky Lens

Square Milky Lens

### Direct AC Mounting Channel



Friction-fit Mounting Channel



Mounting clips (including 2 clips per foot)



Sold with AC plug or bare wire input



2 compatible channels