



FLEXIBLE BACKLYTE

COMMERCIAL | ENTERTAINMENT | HEALTHCARE | HOSPITALITY | MUSEUMS | PUBLIC SPACES | RESIDENTIAL | RETAIL



Min. Bending Radius:
2.95 in. (75 mm)

Flexible BackLyte is engineered to backlight translucent objects such as onyx, stone and resin panels – even in curved applications! Each nominal 1-ft square panel features nine cuttable square sections that contain an array of 16 pixels. Bend, cut and connect Flexible BackLyte to match the size and shape of your custom project.

STATIC WHITE (3.2W, 6W or 9W)

- 9 CCTs: 1800K, 2000K, 2200K, 2400K, 2700K, 3000K, 3500K, 4100K, 6000K
- Title 24, JA8 compliant from 2200K-4000K!


VARIABLE WHITE (26W)

- Tune for brightness and CCT (from 2400K to 6100K)

RGBW (22W)

- With white LEDs at 3000K, 4000K or 5000K

AVAILABLE COLORS AND COLOR TEMPERATURES

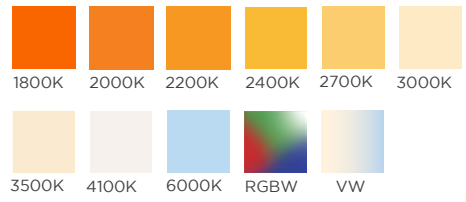

FEATURES:

