MATRIX RIBBONLYTE

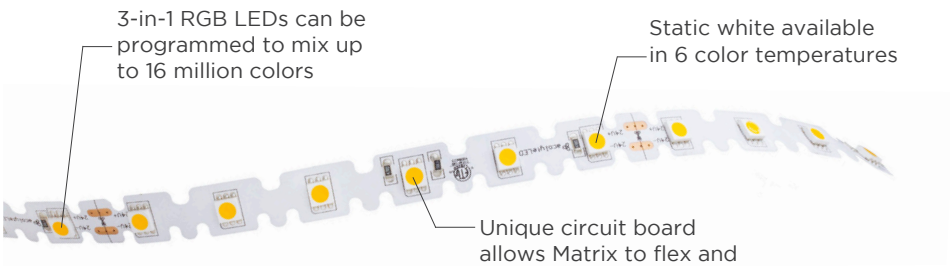

- 3.0 W/ft (10 W/m)
- 24 Volt input
- IP20

IDEAL FOR CURVES, SHARP ANGLES, CIRCULAR COVES, AND COMPLEX SHAPES

AVAILABLE COLOR TEMPERATURES

Horizontal and vertical bending

Bends up to 90 degrees

c UL us LISTED 317073 **RoHS** **IP20**

GEN LED acolyte® Architectural Lighting Solutions