



GEN LED **ACOLYTE**[®]
Architectural Lighting Solutions

VARIABLE WHITE SERIES 2 RIBBONLYTE

TUNABLE FROM 2000K TO 6500K | AVAILABLE IN 1.0, 3.0, 6.0 W/FT

Our Variable White Series 2 RibbonLyte allows you to adjust for brightness and warmth like never before. Now with 140 LEDs per meter, our improved RibbonLyte provides better color mixing, reduced diode visibility and a wider range of color temperatures for tuning your lighting design. Available in three wattages and with a 2 in. (50 mm) cut length, you can use Variable White Series 2 RibbonLyte with a DMX controller or a 2-channel dimmer to create bright, clear, colder light or the warmest, softest tones.

FEATURES

- Single-row, dual-chip layout means 140 LEDs per meter (42 LEDs per foot!)
- Available in three (3) wattages (1W/ft, 3W/ft, 6W/ft)
- 2 in. (50 mm) cut length adds amazing flexibility to your design
- Color temperature range of 2000K-6500K, 90+ CRI
- Use a DMX controller or 2-channel dimmer to adjust brightness and temperature
- 120° beam angle



RoHS

IP20

IP65

IP68

Declare.



1.0 W/ft (3.3 W/m)


- All on: 77 lm/W
- All on: 76.6 lm/ft (251.25 lm/m)

3.0 W/ft (9.8 W/m)

- All on: 73 lm/W
- All on: 218.5 lm/ft (716.68 lm/m)

6.0 W/ft (19.7 W/m)

- All on: 73 lm/W
- All on: 437.4 lm/ft (1434.67 lm/m)

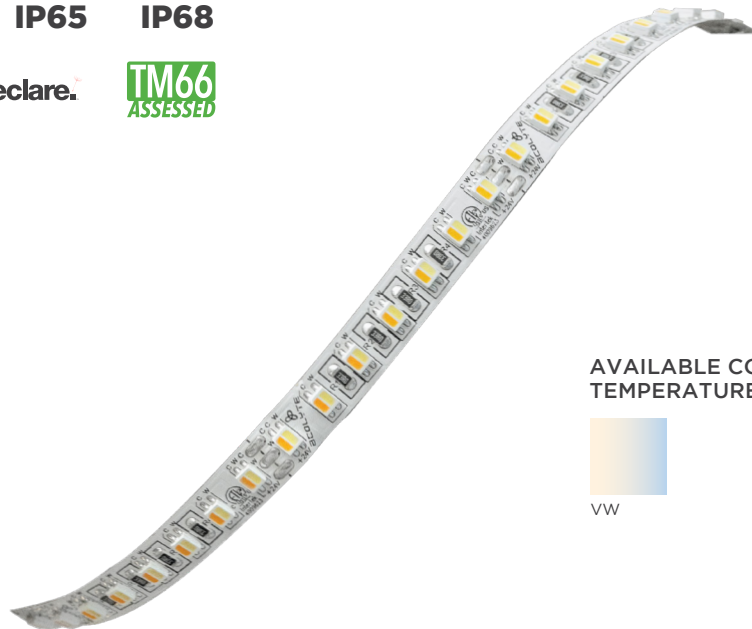

AVAILABLE COLOR TEMPERATURES



VW