

## ARMOR SERIES / AC MINI EXTERIOR LINEAR FIXTURE


AC Mini Linear fixtures feature an onboard driver. Available in 6 static white CCTs ranging from 2700K to 6000K, the AC Mini offers 5 optic beam angles and comes in 5 different lengths. You can daisy chain AC Mini fixtures for up to 112 feet at 120 VAC. This addition to the Armor Series exterior product line is a fantastic solution for wall washing and grazing to create dramatic façade lighting. No remote drivers necessary!

### GEL-FLUSH™ TECHNOLOGY

The Armor Series AC Mini Linear fixture is manufactured with our Gel-Flush™ Technology. Developed with a special sealant from Dow Corning, this proprietary innovation prevents any breach from weather-related elements. No leaking. No condensation. Just clear, unobstructed beams of light.

### Applications:

Commercial      Museums  
Entertainment      Public Spaces

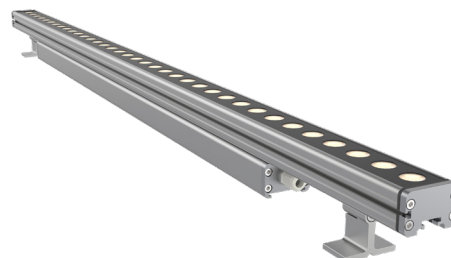

## ORDERING GUIDE

Category	CRI	Input Voltage	Length	Color Temperature	FWHM Beam Angle
<b>MINI</b>	<b>80</b>	<b>AC</b>			
<b>MINI - Armor MINI</b>	<b>80 - 80+ CRI</b>	<b>AC - AC 120-277V</b>	<b>12 - 12.32 in. (313 mm) 9 W</b>	<b>27 - 2700K</b>	<b>10x60 - 10x60°</b>
			<b>16 - 16.1 in. (410 mm) 12 W</b>	<b>30 - 3000K</b>	<b>10 - 10°</b>
			<b>24 - 23.8 in. (605 mm) 18 W</b>	<b>35 - 3500K</b>	<b>20 - 20°</b>
			<b>36 - 35.43 in. (900 mm) 27 W</b>	<b>40 - 4000K</b>	<b>25 - 25°</b>
			<b>47 - 46.9 in. (1190 mm) 36 W</b>	<b>50 - 5000K</b>	<b>50 - 50°</b>
				<b>60 - 6000K</b>	

**OPTIONAL ACCESSORIES** (See pages 3-5 for more information):

#### 1.) Armor Series Mounting Arms:

Small: ARMORMNT0609  
Large: ARMORMNT1422

#### 3.) Asymmetric Louver:

MINIALOUV313 (313 mm)  
MINIALOUV410 (410 mm)  
MINIALOUV605 (605 mm)  
MINIALOUV900 (900 mm)  
MINIALOUV1190 (1190 mm)

#### 5.) 6 Pin Male to Female Jumper Cable:

MINIJUMP6PINMK1000 (1000 mm)  
MINIJUMP6PINMK2000 (2000 mm)

#### 7.) 3 Pin Cable with Female Connector to Bare Wire (Dimming):

MINICBLFB3PINLV2000 (2000 mm)  
MINICBLFB3PINLV6000 (6000 mm)

#### 2.) Symmetric Louver:

MINILOUV313 (313 mm)  
MINILOUV410 (410 mm)  
MINILOUV605 (605 mm)  
MINILOUV900 (900 mm)  
MINILOUV1190 (1190mm)

#### 4.) Glare Shield:

MINISHLD313 (313 mm)  
MINISHLD410 (410 mm)  
MINISHLD605 (605 mm)  
MINISHLD900 (900 mm)  
MINISHLD1190 (1190 mm)

#### 6.) 3 Pin Cable with Female Connector to Bare Wire (Power):

MINICBLFB3PIN2000 (2000 mm)  
MINICBLFB3PIN6000 (6000 mm)


#### 8.) T-Connector (Power Input):

MINICBLINPUT336

#### 9.) T-Connector (Fixture Chain Splitter):

MINICBLTJOINT6PIN

## AVAILABLE COLOR TEMPERATURES



## SPECIFICATIONS


Operating Voltage	120-277V AC																								
Length	12.32 in. / 313 mm					16.1 in. / 410 mm					23.8 in. / 605 mm					35.43 in. / 900 mm					46.9 in. / 1190 mm				
Power Consumption	9 W					12 W					18 W					27 W					36 W				
LEDs per Fixture	9 LEDs					12 LEDs					18 LEDs					27 LEDs					36 LEDs				
Color Temperature	2700K, 3000K, 3500K, 4000K, 5000K, 6000K																								
LED Beam Angle	10°	20°	25°	50°	10° x 60°	10°	20°	25°	50°	10° x 60°	10°	20°	25°	50°	10° x 60°	10°	20°	25°	50°	10° x 60°	10°	20°	25°	50°	10° x 60°
Lumen Output / Foot	1023	1035	969	795	1290	1023	1035	969	795	1290	1023	1035	969	795	1290	1023	1035	969	795	1290	1023	1035	969	795	1290
Total Lumens	1023	1035	969	795	1290	1329	1345	1260	1034	1526	2046	2070	1939	1591	1985	3069	3105	2907	2385	2977	4092	4140	2520	2068	3970
Max. Run Length	90 fixtures @ 120 VAC 127 fixtures @ 220-240 VAC					68 fixtures @ 120 VAC 96 fixtures @ 220-240 VAC					51 fixtures @ 120 VAC 72 fixtures @ 220-240 VAC					37 fixtures @ 120 VAC 52 fixtures @ 220-240 VAC					28 fixtures @ 120 VAC 40 fixtures @ 220-240 VAC				
Control System	0-10V																								
CRI	80+ CRI																								
LED Binning (SDCM)	3-step (80 CRI)																								
Binning Tolerance	+/- 100K																								
Ambient Temperature	-40° F to 122° F (-40° C to 50° C)																								
Housing / Lens Materials	Housing: Extruded Aluminium / Lens: Clear UV Protected PMMA Cover: Tempered Glass End Caps: Extruded Aluminium / Brackets: Extruded Aluminium Housing, bracket, end cap material – 6063 high density aluminum alloy																								
Connector	6 Pin Combined Power and Dimming. 16 AWG Power / 22 AWG Dimming																								
Cable Length	11.81 in. / 300 mm																								
Protection Rating	IP67																								
Impact Rating	IK08																								
Mounting Options	Large Tilttable Stand (180° adjustable), Mounting Arms (available in 2 different sizes)																								
Lamp Life	50,000 hours																								
Certifications	Luminaires – UL 1598, 3rd Ed., issued September 17, 2008, Rev. October 17, 2012 / Luminaires – CSA C22.2 No.250.0-08, 3rd Ed., issued September 17, 2008, Rev. October 17, 2012 (R2013)																								
Fixture Color Finish	Anodized Silver																								

\* ALL LUMEN DATA IS FROM 3000K 80 CRI FIXTURES


## SPECIFICATIONS / DIMENSIONS

### DIMENSIONS


12.32 in. / 313 mm:




16.1 inches / 410 mm:

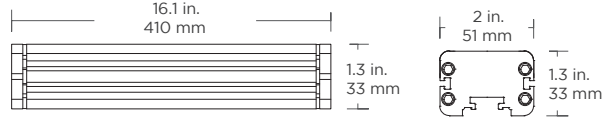


23.8 in. / 605 mm:



35.43 in. / 900 mm:





46.9 in. / 1190 mm:



### MOUNTING HARDWARE


#### Large Tilttable Stand

For adjustable mounting angles from 0-180°





#### Mounting Arms

Small Mounting Arm Part Number: ARMORMNT0609  
Large Mounting Arm Part Number: ARMORMNT1422

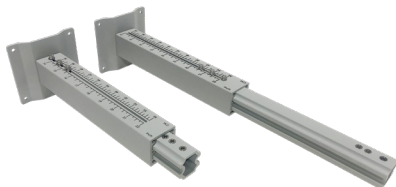

#### Armor Series Mounting Arm

Adjustable mounts (in 3 sizes) help set desired angle and distance from lighting surface

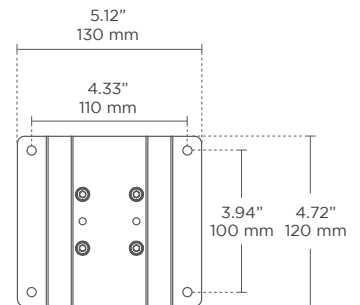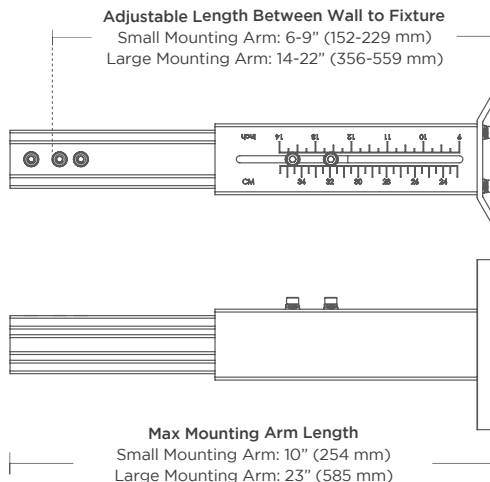



## ACCESSORIES

### Symmetric Louver

For glare reduction  
Note: This will affect beam angle




Part Number:  
MINILOUV313 (313 mm)  
MINILOUV410 (410 mm)  
MINILOUV605 (605 mm)  
MINILOUV900 (900 mm)  
MINILOUV1190 (1190 mm)

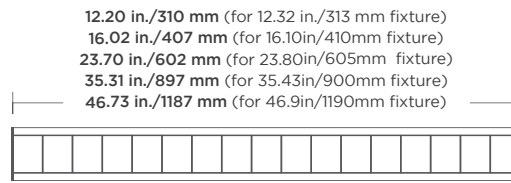



Side View

### Asymmetric Louver

For glare reduction  
Note: This will affect beam angle



Part Number:  
MINIALOUV313 (313 mm)  
MINIALOUV410 (410 mm)  
MINIALOUV605 (605 mm)  
MINIALOUV900 (900 mm)  
MINIALOUV1190 (1190 mm)

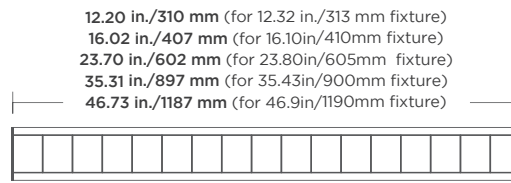



Side View

### Glare Shield

To reduce glare or redirect light



Part Number:  
MINISHLD313 (313 mm)  
MINISHLD410 (410 mm)  
MINISHLD605 (605 mm)  
MINISHLD900 (900 mm)  
MINISHLD1190 (1190 mm)

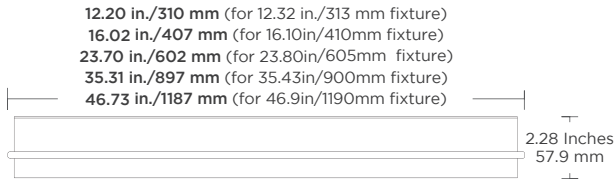

Side View

### 3 Pin Cable with Female Connector to Bare Wire (Power)

To bare wire for incoming power  
Lengths: 78.74 in. (2000 mm) and 78.7 in. (6000 mm)



Part Number:  
MINICLFB3PINLV2000 (6.6 ft / 2000 mm)  
MINICLFB3PINLV6000 (19.7 ft / 6000 mm)

### 6 Pin Male To Female Jumper Cable

To connect 6 pin male connector to 6 pin female connector  
Lengths: 39.4 in. (1000 mm) and 78.7 in. (2000 mm)  
(Consult factory for custom length)



Part Number:  
MINIJUMP6PINMK1000 (3.3 ft / 1000 mm)  
MINIJUMP6PINMK2000 (6.6 ft / 2000 mm)


### 3 Pin Cable with Female Connector to Bare Wire (Dimming)

To bare wire for dimming  
Lengths: 78.74 in. (2000 mm) and 78.7 in. (6000 mm)




Part Number:  
MINICLFB3PIN2000 (6.6 ft / 2000 mm)  
MINICLFB3PIN6000 (19.7 ft / 6000 mm)

### T-Connector (Power Input)



Part Number:  
MINICBLINPUT336


### T-Connector (Fixture Chain Splitter)



Part Number:  
MINICBLTJOINT6PIN

## CONNECTION



### STATIC WHITE WIRING DIAGRAM:

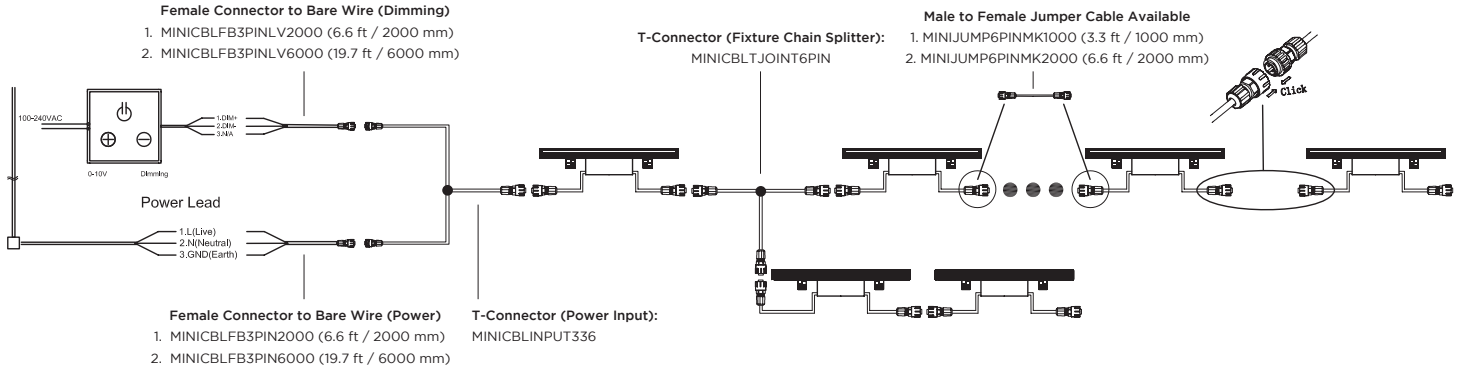

### 6-PIN CONNECTOR AND WIRE SPECS

Cable	Function	Pin ID	Wire Size	Wire Color (US)
Power Lead in / Power Extension	L (Line)	1	16AWG	Black
	N (Neutral)	2	16AWG	White
	GND (Ground)	3	16AWG	Green
Dimming	DIM +	4	22AWG	Purple
	DIM -	5	22AWG	Gray
	N/A	6	22AWG	Yellow

PIN ID:




6-Pin Connector is used for the following cables:

1. Fixture in/out
2. MINICBLINPUT336 (Output Side)
3. MINICBLTJOINT6PIN
4. MINIJUMP6PINMK1000
5. MINIJUMP6PINMK2000

### 3-PIN CONNECTOR AND WIRE SPECS

Cable	Function	Pin ID	Wire Size	Wire Color (US)
Power Lead In / Power Extension	L (Line)	1	16AWG	Black
	N (Neutral)	2	16AWG	White
	GND (Ground)	3	16AWG	Green


PIN ID:



3-Pin Connector is used for the following cables:

1. MINICBLINPUT336 (Input side power)
2. MINICBLFB3PIN2000
3. MINICBLFB3PIN6000

LEDs Per Fixture to Dimming	DIM +	1	22AWG	Purple
	DIM -	2	22AWG	Gray
	N/A (Do Not Use)	3	22AWG	Yellow



3-Pin Connector is used for the following cables:

1. MINICBLINPUT336 (Input side dimming)
2. MINICBLFB3PINLV2000
3. MINICBLFB3PINLV6000

#### Notes:

1. The top wiring diagram shows only typical connections. Actual wiring depends on the site configuration and installation.
2. The wire connection method shall be determined by local electrical codes and regulations. Wire nuts or screw terminal blocks are recommended for wire connection.
3. Actual number of wall washer can be connected may vary according to cable lengths and signal source.
4. Shield signal cables are recommended for signal protection.