

### ARMOR SERIES / AC MINI EXTERIOR LINEAR FIXTURE

AC Mini Linear fixtures feature an onboard driver. Available in 6 static white CCTs ranging from 2700K to 6000K, the AC Mini offers 5 optic beam angles and comes in 5 different lengths. You can daisy chain AC Mini fixtures for up to 112 feet at 120 VAC. This addition to the Armor Series exterior product line is a fantastic solution for wall washing and grazing to create dramatic façade lighting. No remote drivers necessary!

#### GEL-FLUSH™ TECHNOLOGY

The Armor Series AC Mini Linear fixture is manufactured with our Gel-Flush™ Technology. Developed with a special sealant from Dow Corning, this proprietary innovation prevents any breach from weather-related elements. No leaking. No condensation. Just clear, unobstructed beams of light.



#### Applications:

Commercial      Museums  
 Entertainment    Public Spaces

### ORDERING GUIDE

Category	CRI	Input Voltage	Length	Color Temperature	FWHM Beam Angle
<b>MINI</b>	<b>80</b>	<b>AC</b>			
<b>MINI - Armor MINI</b>	<b>80 - 80+ CRI</b>	<b>AC - 120-277 VAC</b>	<b>12</b> - 12.3 in. (313 mm) 9 W <b>16</b> - 16.1 in. (410 mm) 12 W <b>24</b> - 23.8 in. (605 mm) 18 W <b>36</b> - 35.4 in. (900 mm) 27 W <b>47</b> - 46.9 in. (1190 mm) 36 W	<b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K <b>40</b> - 4000K <b>50</b> - 5000K <b>60</b> - 6000K	<b>10x60</b> - 10x60° <b>10</b> - 10x10° <b>20</b> - 20x20° <b>25</b> - 25x25° <b>50</b> - 50x50°

OPTIONAL ACCESSORIES (See pages 3-5 for more information):

**1.) Armor Series Mounting Arms:**

Small: ARMORMNT0609  
 Large: ARMORMNT1422

**3.) Asymmetric Louver:**

MINIALOUV313 (313 mm)  
 MINIALOUV410 (410 mm)  
 MINIALOUV605 (605 mm)  
 MINIALOUV900 (900 mm)  
 MINIALOUV1190 (1190 mm)

**5.) 6 Pin Male to Female Jumper Cable:**

MINIJUMP6PINMK1000 (1000 mm)  
 MINIJUMP6PINMK2000 (2000 mm)

**7.) T-Connector (Fixture Chain Splitter):**

MINICBLTJOINT6PIN

**2.) Symmetric Louver:**

MINILOUV313 (313 mm)  
 MINILOUV410 (410 mm)  
 MINILOUV605 (605 mm)  
 MINILOUV900 (900 mm)  
 MINILOUV1190 (1190 mm)

**4.) Glare Shield:**

MINISHLD313 (313 mm)  
 MINISHLD410 (410 mm)  
 MINISHLD605 (605 mm)  
 MINISHLD900 (900 mm)  
 MINISHLD1190 (1190 mm)


**6.) 6 Pin Cable with Female Connector to Bare Wire (Power):**

MINICBLFB6PIN2000 (2000 mm)  
 MINICBLFB6PIN6000 (6000 mm)


**8.) End Cap:**

MINIAC-CAPSW

#### AVAILABLE COLOR TEMPERATURES



#### AVAILABLE BEAM ANGLES



SPECIFICATIONS


Operating Voltage	120 - 277 VAC																							
Length	12.3 in. / 313 mm				16.1 in. / 410 mm				23.8 in. / 605 mm				35.4 in. / 900 mm				46.9 in. / 1190 mm							
Power Consumption	9 W				12 W				18 W				27 W				36 W							
Amperage	0.08 A @ 120 V 0.04 A @ 230 V 0.04 A @ 277 V				0.11 A @ 120 V 0.06 A @ 230 V 0.05 A @ 277 V				0.17 A @ 120 V 0.09 A @ 230 V 0.07 A @ 277 V				0.25 A @ 120 V 0.13 A @ 230 V 0.11 A @ 277 V				0.33 A @ 120 V 0.17 A @ 230 V 0.14 A @ 277 V							
LEDs per Fixture	9 LEDs				12 LEDs				18 LEDs				27 LEDs				36 LEDs							
Color Temperature	2700K, 3000K, 3500K, 4000K, 5000K, 6000K																							
LED Beam Angle	10 x 10°	20 x 20°	25 x 25°	50 x 50°	10 x 60°	10 x 10°	20 x 20°	25 x 25°	50 x 50°	10 x 60°	10 x 10°	20 x 20°	25 x 25°	50 x 50°	10 x 60°	10 x 10°	20 x 20°	25 x 25°	50 x 50°	10 x 60°	10 x 10°	20 x 20°	25 x 25°	50 x 50°
Lumen Output / Foot	1023	1035	969	795	1290	1023	1035	969	795	1290	1023	1035	969	795	1290	1023	1035	969	795	1290	1023	1035	969	795
Total Lumens	1050.52	1062.84	995.07	816.39	1324.7	1376.08	1392.22	1303.44	1069.39	1735.24	2030.56	2054.38	1923.38	1578	2560.53	3020.67	3056.1	2861.22	2347.44	3809.06	3994	4040.85	3783.17	3103.84
Max. Run Length	90 fixtures @ 120 VAC 127 fixtures @ 220-240 VAC 145 fixtures @ 277 VAC				68 fixtures @ 120 VAC 96 fixtures @ 220-240 VAC 111 fixtures @ 277 VAC				51 fixtures @ 120 VAC 72 fixtures @ 220-240 VAC 82 fixtures @ 277 VAC				37 fixtures @ 120 VAC 52 fixtures @ 220-240 VAC 59 fixtures @ 277 VAC				28 fixtures @ 120 VAC 40 fixtures @ 220-240 VAC 45 fixtures @ 277 VAC							
Control System	0 - 10 V																							
CRI	80+ CRI																							
LED Binning (SDCM)	3-step (80 CRI)																							
Binning Tolerance	+/- 100K																							
Ambient Temperature	-40 — 122 °F (-40 — 50 °C)																							
Housing / Lens Materials	Housing: Extruded Aluminium / Lens: Clear UV Protected PMMA Cover: Tempered Glass End Caps: Extruded Aluminium / Brackets: Extruded Aluminium Housing, bracket, end cap material - 6063 high density aluminum alloy																							
Connector	6 Pin Combined Power and Dimming. 16 AWG Power / 22 AWG Dimming																							
Cable Length	11.81 in. / 300 mm																							
Protection Rating	IP67																							
Impact Rating	IK08																							
Mounting Options	Large Tilttable Stand (180° adjustable), Mounting Arms (available in 2 different sizes)																							
Lamp Life	50,000 hours																							
Certifications	Luminaires - UL 1598, 3rd Ed., issued September 17, 2008, Rev. October 17, 2012 / Luminaires - CSA C22.2 No.250.0-08, 3rd Ed., issued September 17, 2008, Rev. October 17, 2012 (R2013)																							
Fixture Color Finish	Anodized Silver																							

\* ALL LUMEN DATA IS FROM 3000K 80 CRI FIXTURES


SPECIFICATIONS / DIMENSIONS

DIMENSIONS


12.3 in. / 313 mm:

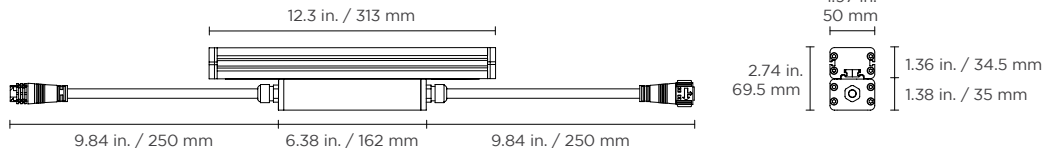


16.1 in. / 410 mm:

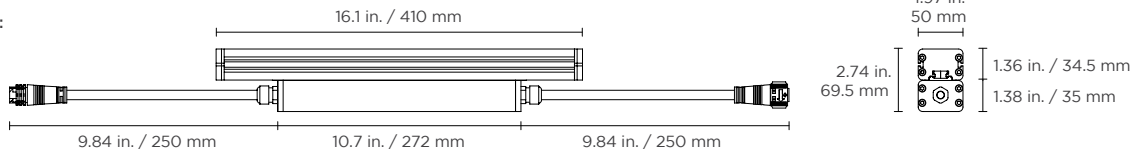


23.8 in. / 605 mm:

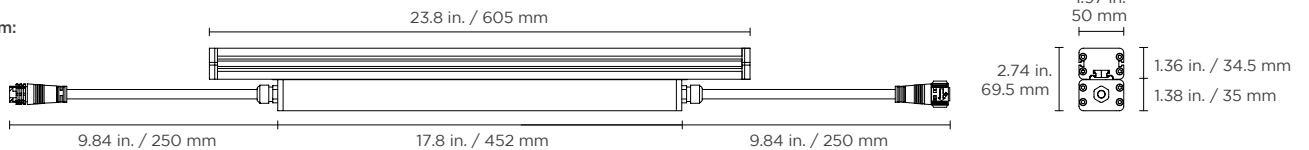

35.4 in. / 900 mm:

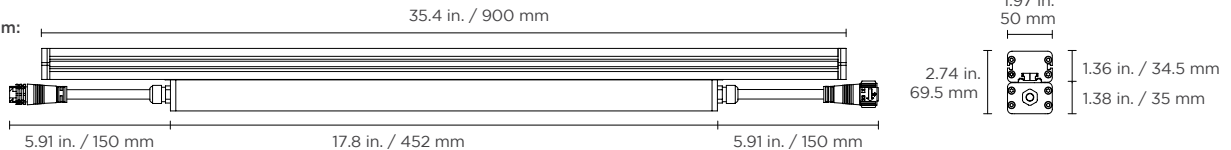



46.9 in. / 1190 mm:

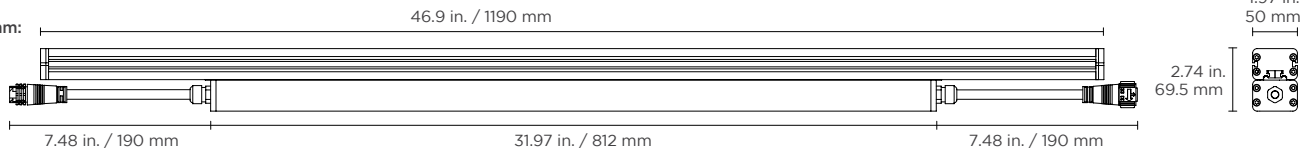

MOUNTING HARDWARE


Large Tilttable Stand

For adjustable mounting angles from 0-180°


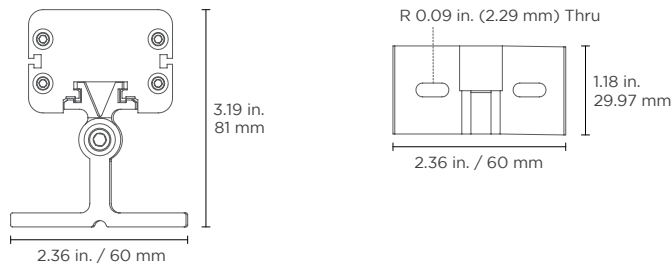


Mounting Arms

Small Mounting Arm Part Number: ARMORMNT0609  
Large Mounting Arm Part Number: ARMORMNT1422

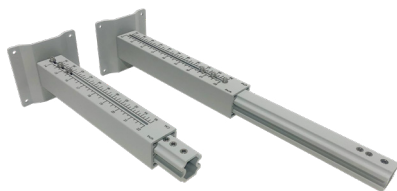

Adjustable mounts (in 3 sizes) help set desired angle and distance from lighting surface

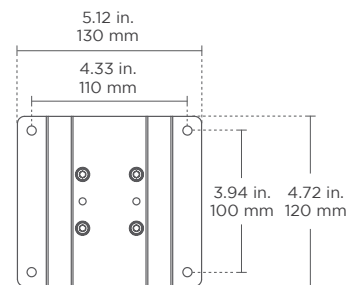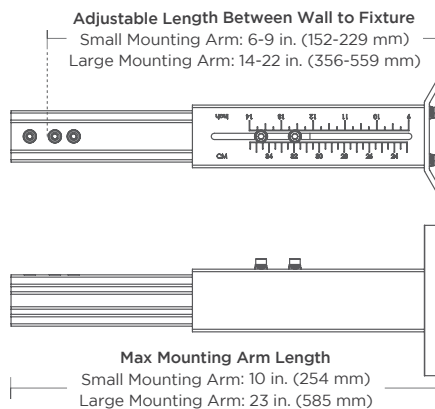


ACCESSORIES

**Symmetric Louver**


For glare reduction  
Note: This will affect beam angle



Part Number:  
MINILOUV313 (313 mm)  
MINILOUV410 (410 mm)  
MINILOUV605 (605 mm)  
MINILOUV900 (900 mm)  
MINILOUV1190 (1190 mm)

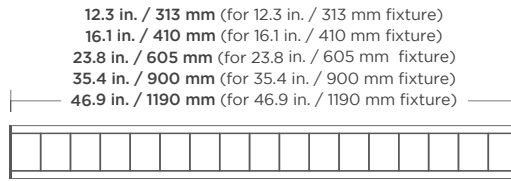

Not recommended for exterior applications




Side View

**Asymmetric Louver**


For glare reduction  
Note: This will affect beam angle



Part Number:  
MINIALOUV313 (313 mm)  
MINIALOUV410 (410 mm)  
MINIALOUV605 (605 mm)  
MINIALOUV900 (900 mm)  
MINIALOUV1190 (1190 mm)

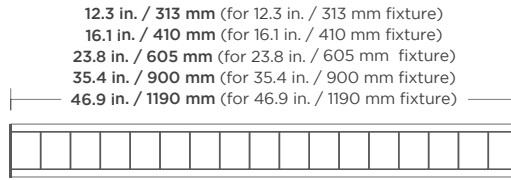

Not recommended for exterior applications




Side View

**Glare Shield**


To reduce glare or redirect light



Part Number:  
MINISHLD313 (313 mm)  
MINISHLD410 (410 mm)  
MINISHLD605 (605 mm)  
MINISHLD900 (900 mm)  
MINISHLD1190 (1190 mm)

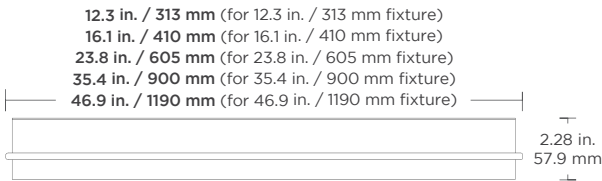

Adds 2.0 in. / 50.8 mm to the height of the fixture

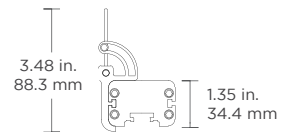

Side View

**6 Pin Cable with Female Connector to Bare Wire (Power)**

To bare wire for incoming power  
Lengths: 78.74 in. (2000 mm) and 19.7 ft (6000 mm)



Part Number:  
MINICBLFB6PIN2000 (6.6 ft / 2000 mm)  
MINICBLFB6PIN6000 (19.7 ft / 6000 mm)

**6 Pin Male To Female Jumper Cable**

To connect 6 pin male connector to 6 pin female connector  
Lengths: 39.4 in. (1000 mm) and 78.7 in. (2000 mm)  
(Consult factory for custom length)




Part Number:  
MINIJUMP6PINMK1000 (3.3 ft / 1000 mm)  
MINIJUMP6PINMK2000 (6.6 ft / 2000 mm)

**T-Connector (Fixture Chain Splitter)**



Part Number:  
MINICBLTJOINT6PIN


**End Cap**

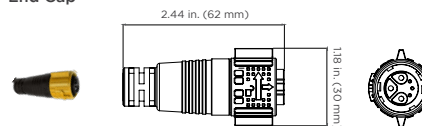

Part Number:  
MINIAC-CAPSW

CONNECTION



STATIC WHITE WIRING DIAGRAM

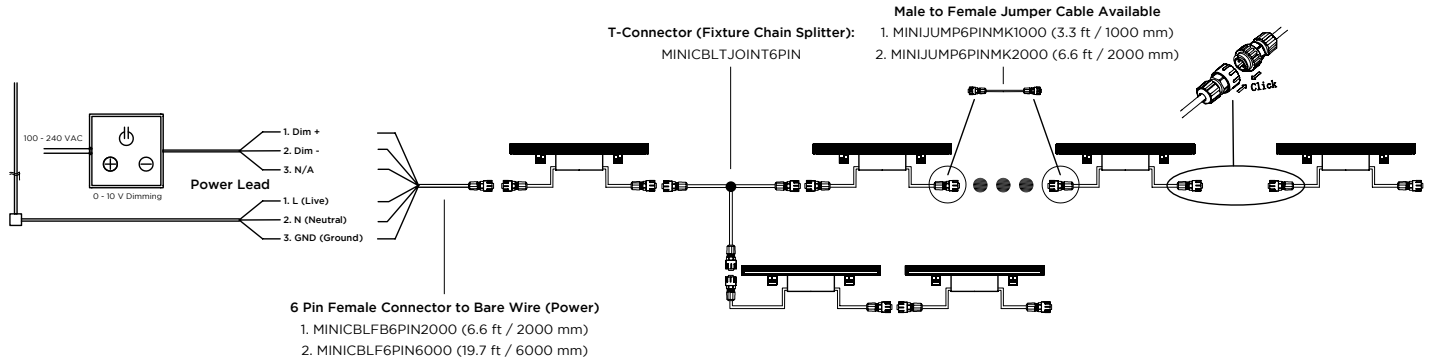

6-PIN CONNECTOR AND WIRE SPECS

Cable	Function	Pin ID	Wire Size	Wire Color (US)
Power Lead in / Power Extension	L (Line)	1	16AWG	Black
	N (Neutral)	2	16AWG	White
	GND (Ground)	3	16AWG	Green
Dimming	DIM +	4	22AWG	Purple
	DIM -	5	22AWG	Gray
	N/A	6	22AWG	Yellow

PIN ID:



6-Pin Connector is used for the following cables:

1. Fixture in/out
2. MINICBLTJOINT6PIN
3. MINIJUMP6PINMK1000
4. MINIJUMP6PINMK2000
5. MINICBLF6PIN2000
6. MINICBLF6PIN6000

Notes:

1. The top wiring diagram shows only typical connections. Actual wiring depends on the site configuration and installation.
2. The wire connection method shall be determined by local electrical codes and regulations. Wire nuts or screw terminal blocks are recommended for wire connection.
3. Actual number of wall washer can be connected may vary according to cable lengths and signal source.
4. Shield signal cables are recommended for signal protection.

REV.26NOV2024

**GLOBAL HQ**

320 Murray Hill Pkwy  
East Rutherford, NJ 07073  
U.S.  
T: (+1) 212 629 6830  
E: Sales-US@GENLEDBrands.com

**EUROPEAN HQ**

Hogeweyseleaan 119  
1382 JK Weesp  
Netherlands  
T: (+31) 346 235 000  
E: SalesEurope@GENLEDBrands.com

**MEINA HQ**

PO Box 371378, #823, Building 4EA  
Dubai Airport Free Zone, Dubai, UAE  
T: (+971) 4 701 7901  
E: SalesMEINA@genlebrands.com

**ASIA-PACIFIC HQ**

Room 402, Building D  
Shenshi Tongchuang Science and Technology Park  
No. 16 Hongyin Road  
Xingqiang Community, Xihu Street  
Guangming District, Shenzhen, China 518107  
Sales: (+86) 139 1836 3905  
Office: (+86) 755 8529 0710  
E: Sales-Pacific@GENLEDBrands.com