

ARMOR SERIES | MINI LINEAR INTERNATIONAL FIXTURES

With a small profile and 5 different optics options, you can use the Armor Series MINI Linear International fixture in several applications or one project. 6 color temperatures and 3 different lengths allow mixing and matching as needed to fit in any location. Choose the mounting bracket to match your application, from low space for vertical washing of facades, to the tilting bracket for a more focused control. This version is not compatible to be daisy chained with the regular USA MINI Linear fixtures. The Armor Series Mini Linear International comes with a three-year warranty.

GEL-FLUSH™ TECHNOLOGY

The Armor Series MINI Linear International fixture is manufactured with our Gel-Flush™ Technology. This proprietary innovation prevents breaches from any weather-related elements. Acolyte exterior products are guaranteed to never leak, condensate, or be breached by any environmental elements. This results in a clear and unobstructed beam of light from our fixtures. No more water beads changing and/or refracting the specified beam angles!



IP66

ORDERING GUIDE

Category	CRI	Voltage	Length	Color Temp	FWHM Beam Angle	Mounting Option
MINI		24				
MINI - Armor MINII	80 - 80+ CRI	24 - 24 VDC	0.2 - 185 mm / 7.3 in. (5 W)	27 - 2700K	10x40 - 10x40°	SI - Snap-In
	90 - 90+ CRI		0.5 - 500 mm / 19.7 in. (15 W)	30 - 3000K	15 - 15x15°	TS - Tilttable Stand
			1.0 - 1000 mm / 39.4 in. (30 W)	35 - 3500K	20 - 20x20°	
				40 - 4000K	35 - 35x35°	
				50 - 5000K	50 - 50x50°	
				60 - 6000K		

OPTIONAL ACCESSORIES:

1.) Armor Series Mounting Arms: Small: ARMORMNT0609 Large: ARMORMNT1422	2.) Symmetric Louver: MINILOUV185 (185 mm) MINILOUV500 (500 mm) MINILOUV1000 (1000 mm)	3.) Asymmetric Louver: MINIALOUV185 (185 mm) MINIALOUV500 (500 mm) MINIALOUV1000 (1000 mm)	4.) Glare Shield: MINISHLD185 (185 mm) MINISHLD500 (500 mm) MINISHLD1000 (1000 mm)	5.) 2 Pin Male to Female Jumper Cable: MINIJUMPMF1000 (1000 mm) MINIJUMPMF2000 (2000 mm)	6.) 2 Pin Female Cable to Bare Wire: MINICBLFB300 (300 mm) MINICBLFB500 (500 mm) MINICBLFB1000 (1000 mm) MINICBLFB2000 (2000 mm)
---	---	---	---	--	--

DRIVERS:

NON-DIMMING ELECTRONIC DRIVERS



30W, 60W, 96W Non-Dimming Electronic Class 2 Drivers

Part No.:
• DRVW2430 (30 W)
• DRVW2460 (60 W)
• DRVW2496 (96 W)



240W, 320W Non-Dimming Electronic Drivers

Part No.:
• DRVW24240 (240 W)
• DRVW24320 (320 W)



60W, 96W Non-Dimming Compact Drivers

Part No.:
• DRV2460C (60 W)
• DRV2496C (96 W)



60W, 96W, 288W 0-10V/ELV/MLV 3-in-1 Dimmable Drivers

Part No.:
• DRVW2460TRI010 (60 W)
• DRVW2496TRI010 (96 W)
• DRVW24288TRI010 (288 W)

0-10V/ELV/MLV 3-IN-1

ATHENA WIRELESS COMPATIBLE



94W Athena Wireless Compatible Drivers

Part No.:
• DRVW2494ATH1CH (1 channel)
• DRVW2494ATH2CH (2 channel)

CASAMBI COMPATIBLE DRIVERS



100W & 200W Casambi Compatible 4 Channel Drivers

Part No.:
• DRVW24100CAS4CH (100 W)
• DRVW24200CAS4CH (200 W)

DIMMABLE DALI-2 DRIVERS



96W Dimmable DALI-2 DT6 D4I & DT8 D4I Drivers

Part No.:
• DRVW2496DALI1CH (1 channel)
• DRVW2496DALI2CH (2 channel)


DIMMABLE DALI-2 DRIVERS




75W, 150W, 240W DALI-2 Dimmable Drivers

Part No.:
• DRVW2475DALI1CH (75 W, 1 channel)
• DRVW24150DALI1CH (150 W, 1 channel)
• DRVW24240DALI1CH (240 W, 1 channel)
• DRVW24150DALI2CH (150 W, 2 channels)
• DRVW24150DALI4CH (150 W, 4 channels)

AVAILABLE COLOR TEMPERATURES



AVAILABLE BEAM ANGLES




SPECIFICATIONS

Operating Voltage	24 VDC		
Length	185 mm / 7.3 in.	500 mm / 19.7 in.	1000 mm / 39.4 in.
Power Consumption	5 W	15 W	30 W
LEDs per Fixture	5 LEDs	15 LEDs	30 LEDs
Amperage	0.2 A	0.625 A	1.25 A
Color Temperature	2700K, 3000K, 3500K, 4000K, 5000K, 6000K		
LED Beam Angle	15x15°, 20x20°, 35x35°, 50x50°, 10x40°		
Lumen Output / Meter	2952.4		
Lumen Output / Foot	900.12		
Total Lumens	570.6	1476.2	2952.4
Max. Run Length	14 fixtures	8 fixtures	4 fixtures
Weight	0.48 kg / 1.06 lb	0.85 kg / 1.87 lb	1.2 kg / 2.65 lb
Control System	0-10 V, ELV/MLV, DALI		
CRI	80+ or 90+CRI		
LED Binning (SDCM)	3-step (80 CRI) or 2-step (90 CRI)		
Binning Tolerance	+/- 100K		
Ambient Temperature	-40 — 50 °C (-40 — 122 °F)		
Housing / Lens Materials	Housing: Extruded Aluminium / Lens: Clear UV Protected PMMA Cover: Tempered Glass End Caps: Extruded Aluminium / Brackets: Extruded Aluminium Housing, bracket, end cap material - 6063 high density aluminum alloy		
Connector	2 pin power connector		
Cable Length	300 mm (11.81 in.)		
Protection Rating	IP66		
Impact Rating	IK08		
Mounting Options	Snap-In Clip, Tilttable Stand (140° adjustable), Large Tilttable Stand (180° adjustable), Mounting Arms (available in 2 different sizes)		
Lamp Life	50,000 hours		
Certifications	CE, ETL / Luminaires - UL 1598, 3rd Ed., issued September 17, 2008, Rev. October 17, 2012 / Luminaires - CSA C22.2 No.250.0-08, 3rd Ed., issued September 17, 2008, Rev. October 17, 2012 (R2013)		
Fixture Color Finish	Anodized silver		


* ALL LUMEN DATA IS FROM 2700K 80 CRI FIXTURES.

DIMENSIONS / MOUNTING HARDWARE:


185 mm / 7.3 in.:

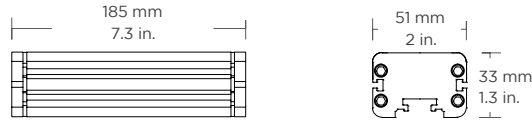

500 mm / 19.7 in.:





1000 mm / 39.4 in.:

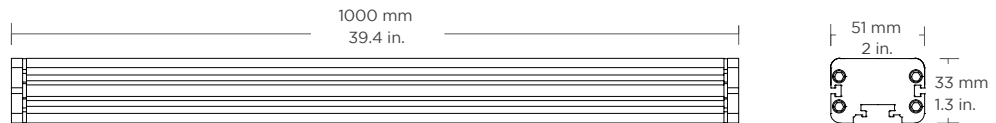

MOUNTING HARDWARE


Snap-In Clip

For narrow installations where mounting clips need to be installed first

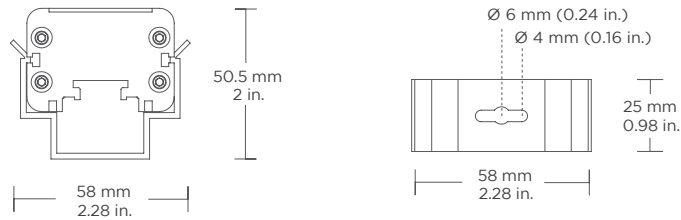



Tiltable Stand

For adjustable mounting angles up to 140°

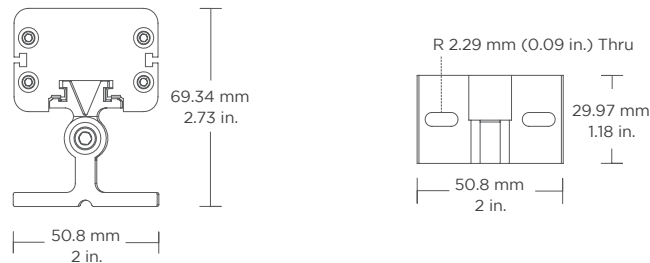

Large Tiltable Stand

For adjustable mounting angles up to 180°

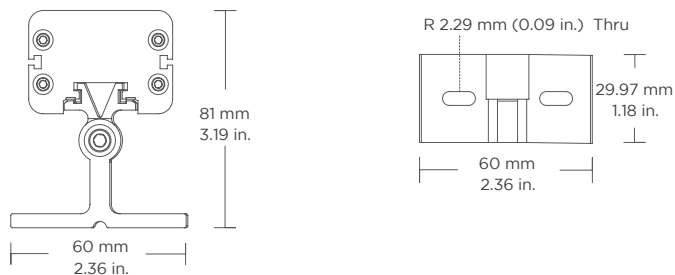


MOUNTING HARDWARE / ACCESSORIES

MOUNTING HARDWARE



Mounting Arms

Small Mounting Arm Part Number: ARMORMNT0609
Large Mounting Arm Part Number: ARMORMNT1422

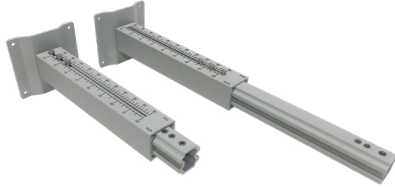

Armor Series Mounting Arm

Adjustable mounts (in 2 sizes) help set desired angle and distance from lighting surface

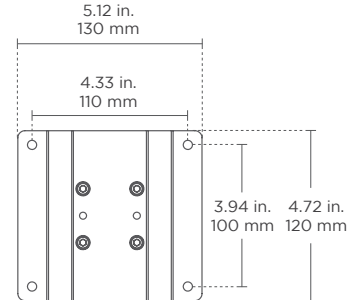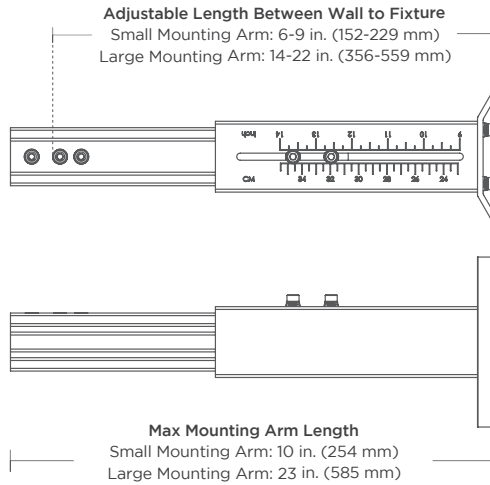


ACCESSORIES

Part Number: MINILOUV




Louver

For glare reduction
Note: This will affect beam angle

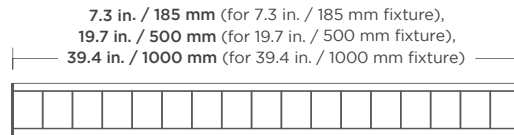

Not recommended for exterior applications




Part Number: MINIALOUV




Asymmetric Louver

For glare reduction
Note: This will affect beam angle

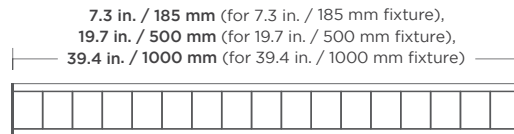

Not recommended for exterior applications




Part Number: MINISHLD




Glare Shield

To reduce glare or redirect light

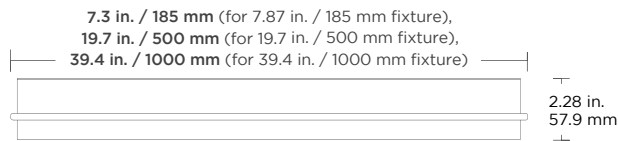

Adds 2.0 in. / 50.8 mm to the height of the fixture



Default cable length on fixture is 11.81 in. / 30 cm



2 Pin Female Cable To Bare Wire
To bare wire for incoming power

MINICBLFB300 (300 mm)
MINICBLFB500 (500 mm)
MINICBLFB1000 (1000 mm)
MINICBLFB2000 (2000mm)




2 Pin Male To Female Jumper Cable
To connect 2 pin male connector to 2 pin female connector


MINIJUMPMF1000 (1000 mm)
MINIJUMPMF2000 (2000 mm)
*Consult factory for custom length

CONNECTION


NON-DIMMING FOR CASE 1:

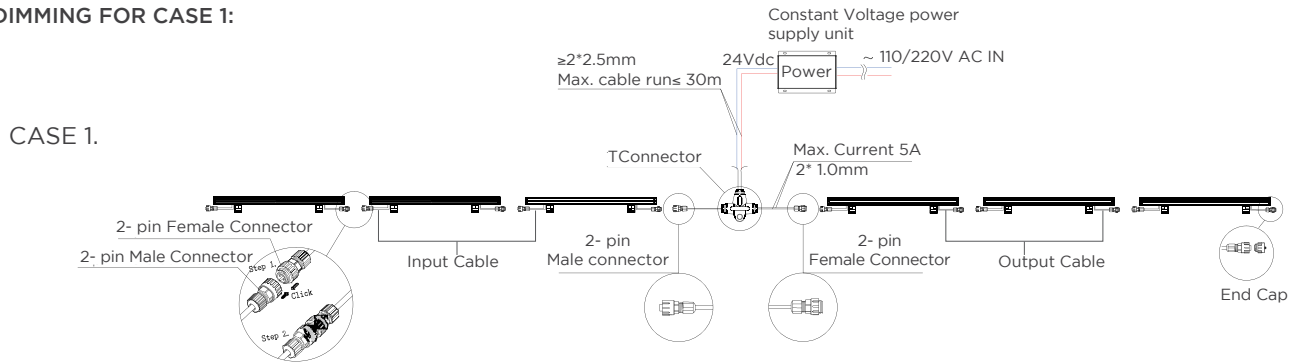


CASE 2.

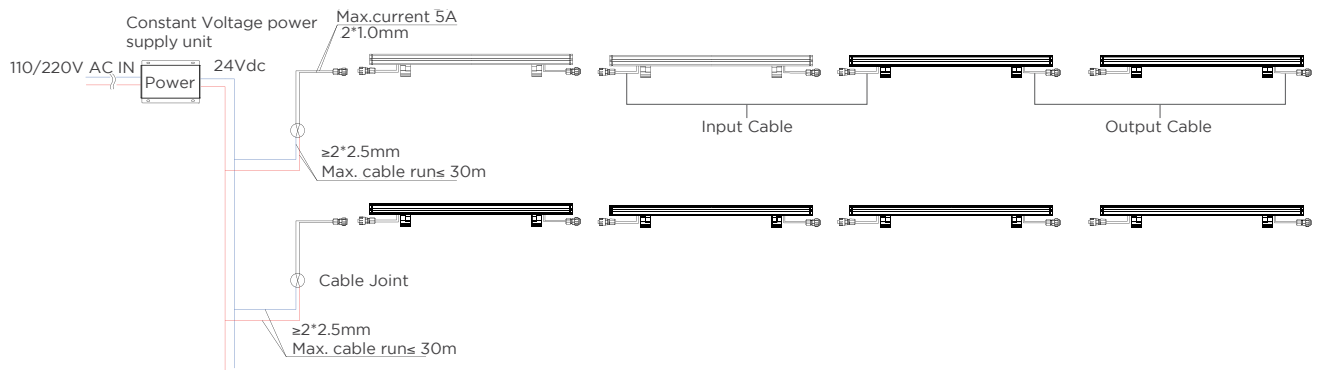

0-10V DIMMING:

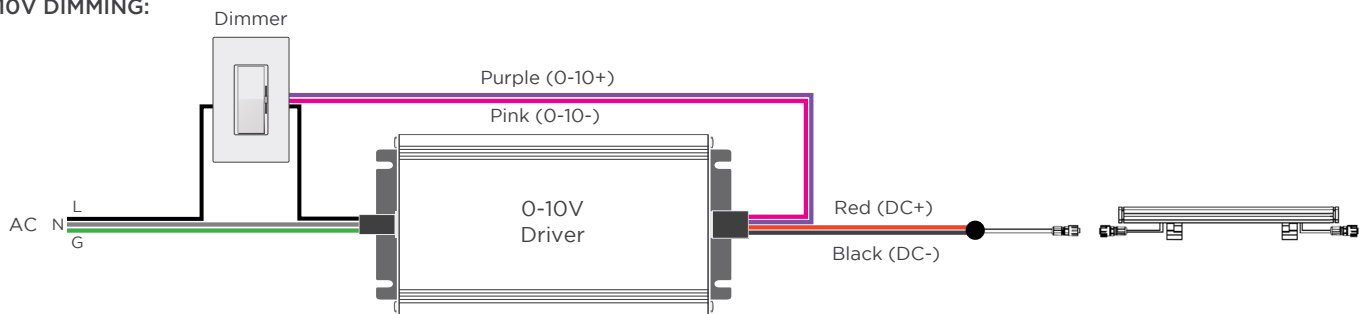


ELV/MLV DIMMING:

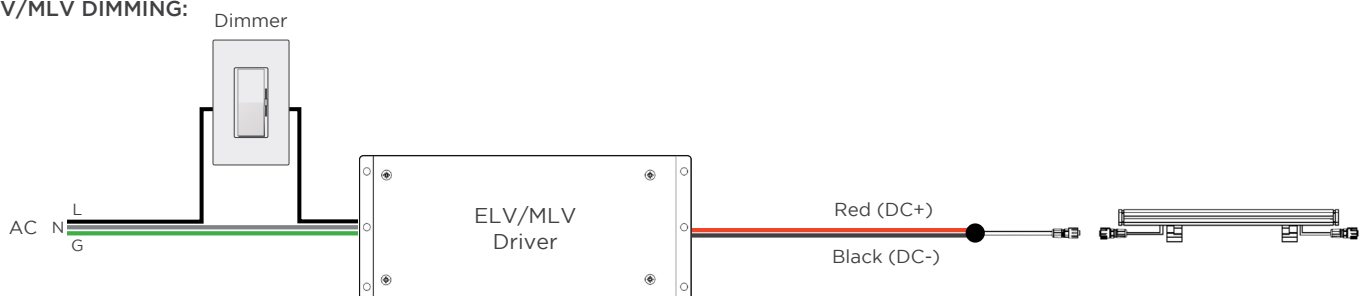


CONNECTION

DALI DIMMING:

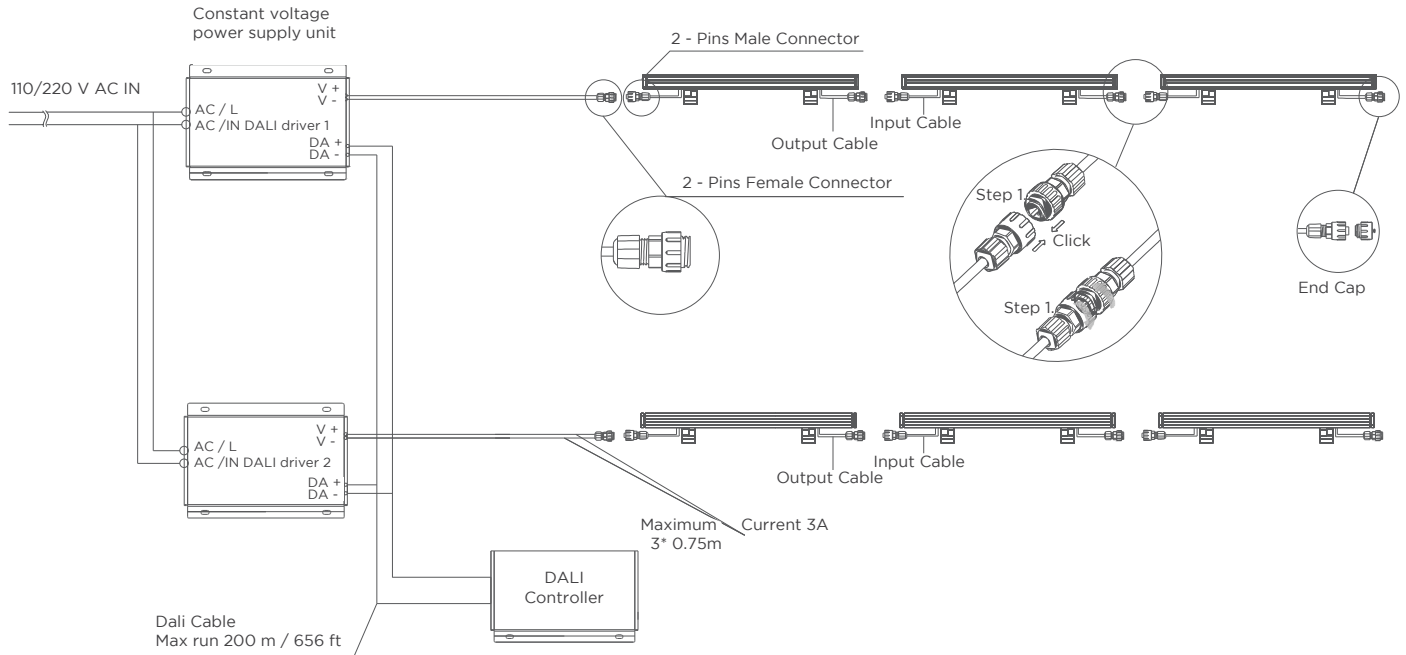

CONNECTORS:

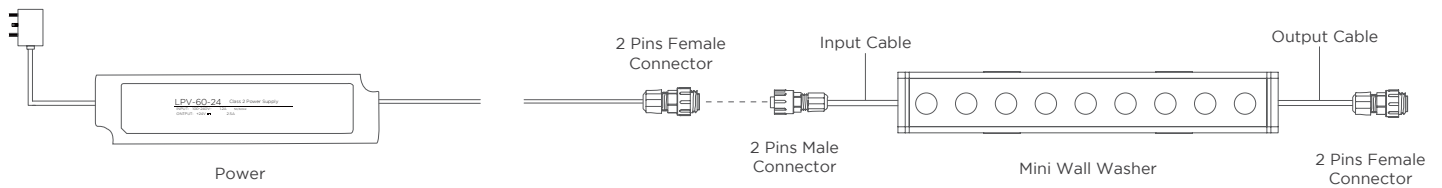

REV.22OCT2025

GLOBAL HQ

320 Murray Hill Pkwy
East Rutherford, NJ 07073
U.S.
T: (+1) 212 629 6830
E: Sales-US@GENLEDBrands.com

EUROPEAN HQ

Hogeweyselaan 119
1382 JK Weesp
Netherlands
T: (+31) 346 235 000
E: SalesEurope@GENLEDBrands.com

MEINA HQ

PO Box 371378, #823, Building 4EA
Dubai Airport Free Zone
Dubai, UAE
T: (+971) 4 701 7901
E: SalesMEINA@genledbrands.com

ASIA-PACIFIC HQ

Room 402, Building D
Shensi Tongchuang Science and Technology Park
No. 16 Hongyin Road
Xingqiang Community, Xinhua Street
Guangming District, Shenzhen, China 518107
T: (+86) 755 8529 0710
E: Sales-Pacific@GENLEDBrands.com