

ARMOR SERIES | MINI EXTERIOR LINEAR FIXTURES

With a small profile and 5 different optics options, you can use this fixture in several applications or one project. 6 color temperature options and 4 different lengths allow mixing and matching as needed to fit in any location. Choose the mounting bracket to match your application, from low space for vertical washing of facades, to the tilting stand for a more focused control. The Armor Series Mini Linear comes with a three-year warranty.

GEL-FLUSH™ TECHNOLOGY

The Armor Series MINI Linear fixture is manufactured with our Gel-Flush™ Technology. This proprietary innovation prevents breaches from any weather-related elements. **GENLED Acolyte®** exterior products are guaranteed to never leak, condensate, or be breached by any environmental elements. This results in a clear and unobstructed beam of light from our fixtures. No more water beads changing and/or refracting the specified beam angles!



Applications:

Commercial
Entertainment

Museums
Public Spaces



IP66

ORDERING GUIDE

Category	CRI	Input Voltage	Wattage	Color Temperature	FWHM Beam Angle
MINI		24			
MINI - Armor MINI	80 - 80+ CRI	24 - 24VDC	6 - 6 W (8.46 in. / 215 mm)	27 - 2700K	10x40 - 10x40°
	90 - 90+ CRI		12 - 12 W (16.1 in. / 410 mm)	30 - 3000K	15 - 15°
			18 - 18 W (23.8 in. / 605 mm)	35 - 3500K	20 - 20°
			36 - 36 W (46.9 in. / 1190 mm)	40 - 4000K	35 - 35°
				50 - 5000K	50 - 50°
				60 - 6000K	

Mounting Option	Dimming
SI - Snap-In	0-10DA - 0-10V or DALI dimmable
TS - Tilttable Stand	TRI - Triac dimmable
TSL - Large Tilttable Stand	(Use TRI model for non-dimming. Triac model is compatible with Acolyte MLV or Universal drivers.)

DRIVERS:

96W Non-dimming Driver + Dimming Module
(Use with 0-10V model)



Driver Part No.: DRVW2496
Dimming Module Part No.: LVDIMMOD0-10PWM
Note: The output of each dimming module is limited to 132W.

60W & 96W Magnetic Driver
(Use with Triac model)



60W Part No.: DRVWDIM2460
96W Part No.: DRVWDIM24100

60W & 96W Universal ELV Drivers
(Use with Triac model)



60W Part No.: DRVW2460ELV
96W Part No.: DRVW2496ELV

2.) Symmetric Louver:

MINILOUV215 (215mm)
MINILOUV410 (410mm)
MINILOUV605 (605mm)
MINILOUV1190 (1190mm)

3.) Asymmetric Louver:

MINIALOUV215 (215mm)
MINIALOUV410 (410mm)
MINIALOUV605 (605mm)
MINIALOUV1190 (1190mm)

4.) Glare Shield:

MINISHLD215 (215mm)
MINISHLD410 (410mm)
MINISHLD605 (605mm)
MINISHLD1190 (1190mm)


5.) 2 Pin Male to Female Jumper Cable:

MINIJUMPMF1000 (1000 mm)
MINIJUMPMF2000 (2000 mm)

6.) 2 Pin Female Cable to Bare Wire:

MINICBLFB300 (300 mm)
MINICBLFB500 (500 mm)
MINICBLFB1000 (1000 mm)
MINICBLFB2000 (2000 mm)

AVAILABLE COLOR TEMPERATURES



OPTIONAL ACCESSORIES:

1.) Armor Series Mounting Arms:

Small: ARMORMNT0609
Large: ARMORMNT1422

SPECIFICATIONS


Operating Voltage	24V DC																			
Length	8.46 in. / 215 mm					16.1 in. / 410 mm					23.8 in.' / 605 mm					46.9' in. / 1190 mm				
Power Consumption	6 W					12 W					18 W					36 W				
LEDs per Fixture	6 LEDs					12 LEDs					18 LEDs					36 LEDs				
Amperage	0.25 A					0.5 A					0.75 A					1.5 A				
Color Temperature	2700K, 3000K, 3500K 4000K, 5000K, 6000K																			
LED Beam Angle	15°	20°	35°	50°	10° x 40°	15°	20°	35°	50°	10° x 40°	15°	20°	35°	50°	10° x 40°	15°	20°	35°	50°	10° x 40°
Lumen Output / Foot	585	645	713	752	743	585	645	713	752	743	585	645	713	752	743	585	645	713	752	743
Total Lumens	412	455	503	530	524	786	867	959	1011	999	1151	1269	1404	1480	1462	2283	2517	2785	2935	2900
Max. Run Length	14 fixtures					6 fixtures					6 fixtures					4 fixtures				
Weight	1.06 lb / 0.48 kg					1.87 lb / 0.85 kg					2.65 lb / 1.2 kg					3.3 lb / 1.5 kg				
Control System	0-10V, DALI																			
CRI	80+ or 90+ CRI																			
LED Binning (SDCM)	3-step (80 CRI) or 2-step (90 CRI)																			
Binning Tolerance	+/- 100K																			
Ambient Temperature	-40° F to 122° F (-40° C to 50° C)																			
Housing / Lens Materials	Housing: Extruded Aluminium / Lens: Clear UV Protected PMMA Cover: Tempered Glass End Caps: Extruded Aluminium / Brackets: Extruded Aluminium Housing, bracket, end cap material – 6063 high density aluminum alloy																			
Connector	2 pin power connector																			
Cable Length	11.81 in. / 300 mm																			
Protection Rating	IP66																			
Impact Rating	IK08																			
Mounting Options	Snap-In Clip, Tilttable Stand (140° adjustable), Large Tilttable Stand (180° adjustable), Mounting Arms (available in 2 different sizes)																			
Lamp Life	50,000 hours																			
Certifications	CE, ETL / Luminaires – UL 1598, 3rd Ed., issued September 17, 2008, Rev. October 17, 2012 / Luminaires – CSA C22.2 No.250.0-08, 3rd Ed., issued September 17, 2008, Rev. October 17, 2012 (R2013)																			
Fixture Color Finish	Anodized Silver																			

* ALL LUMEN DATA IS FROM 2700K 80 CRI FIXTURES


SPECIFICATIONS / DIMENSIONS

DIMENSIONS


8.46 in. / 215 mm:




16.1 inches / 410 mm:



23.8 in. / 605 mm:






46.9 in. / 1190 mm:



MOUNTING HARDWARE




Snap-In Clip

For narrow installations where mounting clips need to be installed first






Tiltable Stand

For adjustable mounting angles from 0-140°



Large Tiltable Stand

For adjustable mounting angles from 0-180°




MOUNTING HARDWARE / ACCESSORIES

MOUNTING HARDWARE



Mounting Arms

Small Mounting Arm Part Number: ARMORMNT0609
Large Mounting Arm Part Number: ARMORMNT1422

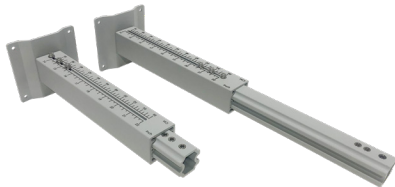

Armor Series Mounting Arm

Adjustable mounts (in 3 sizes) help set desired angle and distance from lighting surface

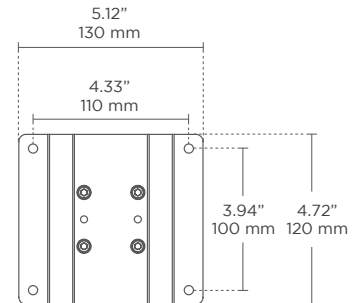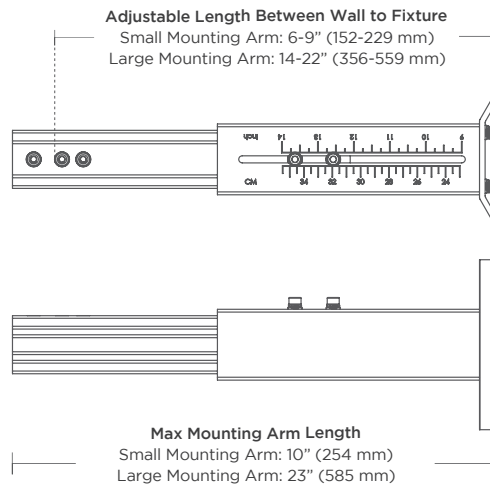


ACCESSORIES

Part Number: MINILOUV




Louver

For glare reduction
Note: This will affect beam angle

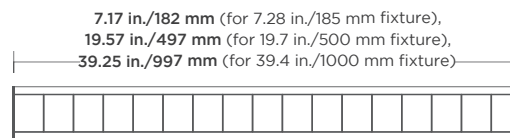

Not recommended for exterior applications




Part Number: MINIALOUV




Asymmetric Louver

For glare reduction
Note: This will affect beam angle

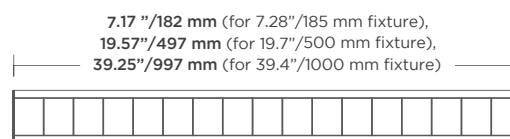

Not recommended for exterior applications




Part Number: MINISHLD




Glare Shield

To reduce glare or redirect light

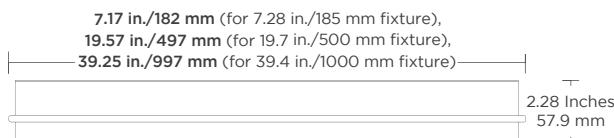

Adds 2 in. / 50.8 mm to the height of the fixture



Part Number: MINICBLFB



2 Pin Female Cable To Bare Wire
To bare wire for incoming power

Part Number: MINIJUMPMF




2 Pin Male To Female Jumper Cable
To connect 2 pin male connector to 2 pin female connector
Default cable length: 11.81 in. / 30 cm
(Consult factory for custom length)


CONNECTION

NON-DIMMING FOR CASE 1:


CASE 1.

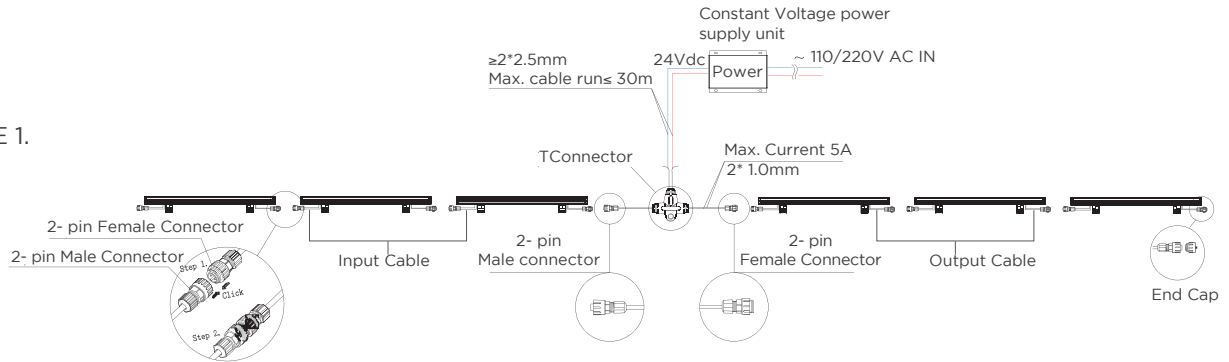

CASE 2.

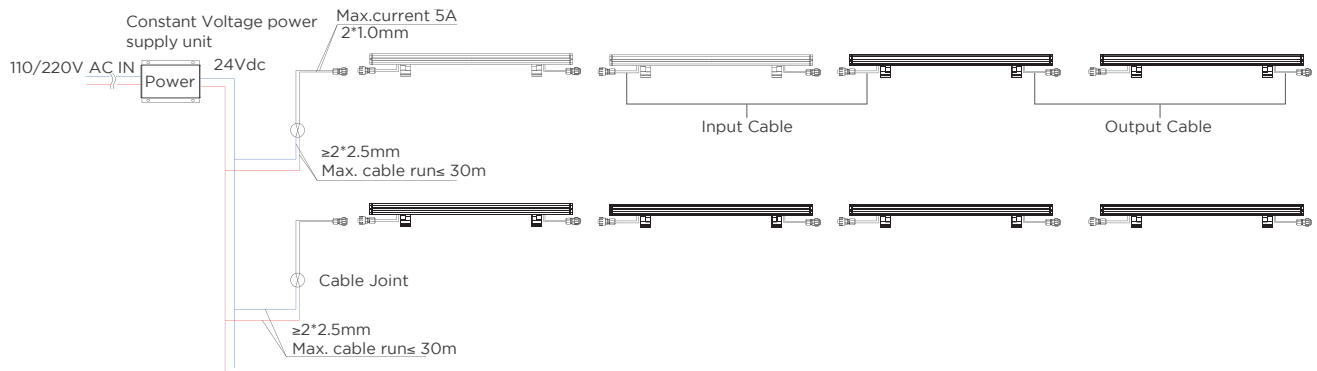


0-10V DIMMING:

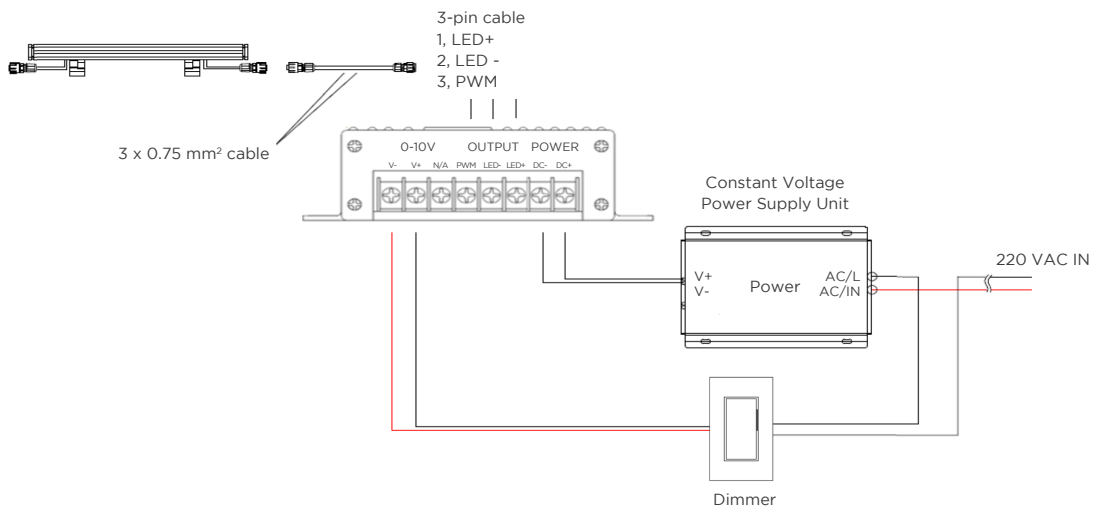

CONNECTION

DALI DIMMING:

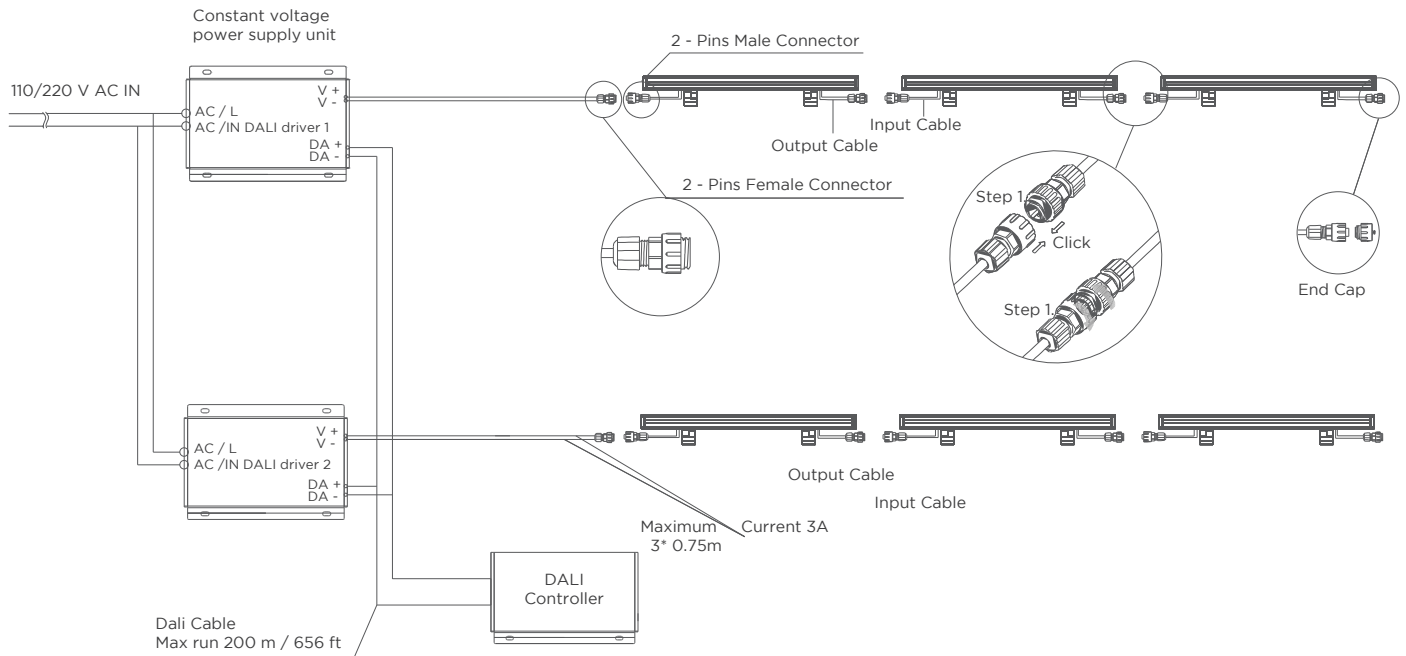

CONNECTORS:

