


AS12 CHANNEL FIXTURE

The new AS12 is a surface mounted channel with a recessed profile option and a 100°x140° beam angle. Offered with a round milky lens, the AS12 fits LED strips with a maximum width of up to 0.47 in. (12 mm).

- Available for field assembly or factory assembly
- 0.76 in. (19.2 mm) wide by 0.8 in. (20.3 mm) deep
- Beam Angle 100°x140°
- Wattage Range from 0.75 W/ft (2.46 W/m) to 6.0 W/ft (19.7 W/m)
- Static White delivered lumen range from 44 lm/ft (145 lm/m) up to 554 lm/ft (1819 lm/m)
- Available in silver, white, black or custom colors
- Round Milky Lens


HOUSING FINISHES

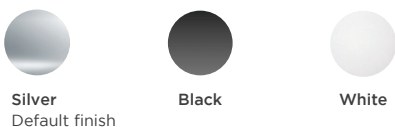

LENS FINISHES



AVAILABLE COLORS & COLOR TEMPERATURES



DIMENSIONS

AS12 Channel	Mounting Clip (included accessory)
Width: 0.76 in. (19.2 mm) Height: 0.8 in. (20.3 mm) Internal Width: 0.47 in. (12 mm) Internal Height: 0.63 in. (16 mm)	Side View Width: 0.57 in. (14.5 mm) Length: 0.95 in. (24 mm) Top View Assembled View Width: 0.7 in. (17.8 mm) Height: 0.83 in. (21 mm)


SPECIFICATIONS

Beam Angle	100°x140°
Lens Type	Round Milky Lens
Length	Channel is sold by the foot and cut to your exact desired length. Required amount of mounting clips included.
Operating Voltage	24V
Dimming	MLV / 0-10 Volt / Lutron Hi-Lume 1% dimming & Hi-Lume Premier 0.1% L3DO LED drivers / Lutron VIVE code compliance available / ELV / DALI
Operating Temperature	-40° F to 158° F (-40° C to 70° C)
Colors	1800K, 2000K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 6000K, Red, Amber, Green, Blue, RGB, RGBA, RGBW, VW, Warm Dim (1800K, 2000K, 2200K only available in IP20)
CRI	90+ CRI (Static white only)
Lamp Life	L70 at 50,000 Hours
MacAdam Ellipses (SDCM)	2-Step Binning (For Static White LEDs only)
Certifications	ETL Listed: UL 2108 Issued: 2004/02/27 Ed: 1 Rev: 2014/02/24 Low Voltage Lighting Systems CSA C22.2#9.0 Issued: 1996/06/01 Ed: 1 (R2011) General Requirements for Luminaires; with Gen. Inst. 1: 1997, Gen Inst. 2: 1998. ROHS compliant UL 2108 - Low Voltage Lighting Systems UL 8750 - Light Emitting Diode (LED) Equipment for Use in Lighting Products UL 1598 / CSA 250.0-08 - Luminaires

ACCESSORIES (SEE PART NUMBERS AT STEP 4 ON PAGE 3)

90° Coupler	Tiltable Stand	End Caps
	Assembled Height with Channel: 1.69 in. (42.8 mm)	End Cap without hole End Cap with hole

Magnetic Mount (Part #: CHMAG0.5)

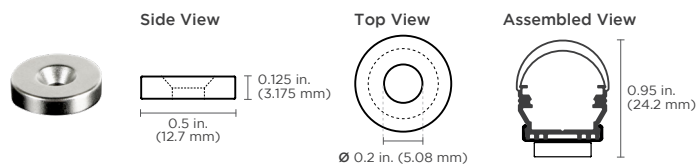

Features:

- High-energy neodymium magnets come attached to mounting clips with countersink hex nuts
- Create easy-mount magnetic channels with minimal surface gaps; no tools or drilling necessary
- Magnets rated for 8 lbs. of pull force with static load

Applications:

- Industrial lighting retrofits for troffers and other metal fixtures
- Metal retail shelf lighting
- Temporary light fixture installations

ORDERING GUIDE

STEP 1 Complete Channel Part Number


CHANNEL	LENS	HOUSING COLOR	
CHAS12			
CHAS12 - AS12 Channel	RM - Round Milky Lens	SV - Silver	WH - White
		BK - Black	Consult factory for custom colors

STEP 2 Complete RibbonLyte Part Number

CATEGORY	CRI	RIBBON TYPE & IP RATING		
RB				
RB - RibbonLyte	0 - Static Color, Color Changing 90 - 90+ CRI Static White	SWS220 - Static White Series 2 IP20 SWS265 - Static White Series 2 IP65 SWS268 - Static White Series 2 IP68 SCS220 - Static Color Series 2 IP20 SCS265 - Static Color Series 2 IP65 SCS268 - Static Color Series 2 IP68	RGB20 - RGB IP20 RGB65 - RGB IP65 RGBWA20 - RGBW/A IP20 RGBWA65 - RGBW/A IP65 VWS220 - VW Series 2 IP20 VWS265 - VW Series 2 IP65	VWS268 - VW Series 2 IP68 WD20 - Warm Dim IP20 WD65 - Warm Dim IP65
WATTAGE		COLOR		
0.75 - 0.75 W/ft (2.46 W/m - Static White, Static Color)		18 - 1800K	RGB - Red, Green, Blue	
1.0 - 1.0 W/ft (3.3 W/m - Variable White)		20 - 2000K	RGB30 - Red, Green, Blue + 3000K	
1.5 - 1.5 W/ft (4.9 W/m - Static White, Static Color)		22 - 2200K	RGB40 - Red, Green, Blue + 4000K (5.5W only)	
2.2 - 2.2 W/ft (7.2 W/m - Static White, Static Color, RGB)		24 - 2400K	RGB60 - Red, Green, Blue + 6000K	
3.0 - 3.0 W/ft (9.8 W/m - Static White, Static Color, Variable White)		27 - 2700K	RGBA - Red, Green, Blue + Amber	
4.4 - 4.4 W/ft (14.4 W/m - Static White, Static Color, RGB, RGBW/RGBA)		30 - 3000K	VW - Variable White	
5.2 - 5.2 W/ft (17.1 W/m - Warm Dim)		35 - 3500K	2920 - Warm Dim 2900K-2000K (IP20)	
5.0 - 5.0 W/ft (16.4 W/m - Static White, Static Color)		40 - 4000K	2721 - Warm Dim 2900K-2000K (IP65)	
5.5 - 5.5 W/ft (18.0 W/m - RGBW/RGBA)		60 - 6000K	Z - Undecided**	
6.0 - 6.0 W/ft (19.7 W/m - Static White, Static Color, Variable White)		R - Red	** For quotes only. Must be chosen before final order.	
		A - Amber		
		G - Green		
		B - Blue		

CONNECTION OPTIONS (See diagrams on the right)

Custom Length (ft.)	
1 - End Feed Bare Wire Connection	4 - End Feed with IP67 Male Coupler
2 - Back Feed Bare Wire Connection	5 - Soldered Daisy Chain
3 - Side Feed Bare Wire Connection	6 - Daisy Chain With IP67 Couplers

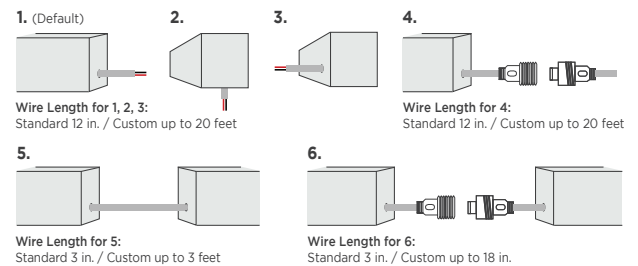

STEP 3 Complete Assembly Option & Length

ASSEMBLY OPTION	LENGTH (Standard factory assembled length up to 78 in. / 2 m)
FI - Field Assembly	Consult factory for custom factory assembled length (up to 13 ft / 4 m)
FA - Factory Assembly	

STEP 4 Add Accessories

ACCESSORIES	
CHCOUP90AS12SV - 90° Coupler Silver	TILTSTANDST - Tilttable Stand
CHCOUP90AS12BK - 90° Coupler Black	CHMAGO.5 - Magnetic Mount
CHCOUP90AS12WH - 90° Coupler White	

SPECIFICATIONS

Available Wattages	Cutable Length	LED Pitch	Color Temp.	lm/W without Lens	Delivered Lumens with Round Lens (lm/ft / lm/m)	Standard Cable Length	Compatible with Channel		
							IP20	IP65	IP68
0.75 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	1800K	84	44 / 145	12 in. (30.5 cm)	✓	✓	✓
			2000K	99	52 / 171				
			2200K	109	57 / 188				
			2400K	113	59 / 195				
			2700K	123	65 / 212				
			3000K	123	65 / 212				
			3500K	130	68 / 224				
			4000K	134	70 / 231				
1.5 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	6000K	131	69 / 226	12 in. (30.5 cm)	✓	✓	✓
			1800K	84	88 / 289				
			2000K	98	103 / 338				
			2200K	109	114 / 375				
			2400K	113	119 / 389				
			2700K	123	129 / 424				
			3000K	123	129 / 424				
			3500K	129	135 / 444				
2.2 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	4000K	134	141 / 462	12 in. (30.5 cm)	✓	✓	✓
			6000K	131	138 / 451				
			1800K	83	128 / 419				
			2000K	96	148 / 485				
			2200K	106	163 / 536				
			2400K	111	171 / 561				
			2700K	120	185 / 606				
			3000K	122	188 / 616				
3.0 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	3500K	127	196 / 642	12 in. (30.5 cm)	✓	✓	✓
			4000K	133	205 / 672				
			6000K	128	197 / 647				
			1800K	84	176 / 579				
			2000K	98	206 / 675				
			2200K	108	227 / 744				
			2400K	109.8	231 / 756				
			2700K	122.9	258 / 847				
4.4 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	3000K	130	273 / 896	12 in. (30.5 cm)	✓	✓	✓
			3500K	133	279 / 916				
			4000K	133	279 / 916				
			6000K	128	269 / 882				
			1800K	81	249 / 818				
			2000K	95	293 / 960				
			2200K	105	323 / 1061				
			2400K	109	336 / 1101				
5.0 Static White Series 2	1.4 in. (35.7 mm)	68 LEDs/ft (224 LEDs/m)	2700K	122	376 / 1233	12 in. (30.5 cm)	✓	✓	✓
			3000K	129	397 / 1304				
			3500K	132	407 / 1334				
			4000K	132	407 / 1334				
			6000K	126	388 / 1273				
			1800K	83	291 / 953				
			2000K	98	343 / 1125				
			2200K	107	375 / 1229				
			2400K	110	384 / 1261	12 in. (30.5 cm)	✓	✓	
			2700K	123	430 / 1411				
			3000K	130	455 / 1493				
			3500K	133	466 / 1527				
			4000K	133	466 / 1527				
			6000K	127	445 / 1458				

SPECIFICATIONS

Available Wattages	Cutttable Length	LED Pitch	Color Temp.	lm/W without Lens	Delivered Lumens with Square Lens (lm/ft / lm/m)	Standard Cable Length	Compatible with Channel		
							IP20	IP65	IP68
6.0 Static White Series 2	1.4 in. (35.7 mm)	68 LEDs/ft (224 LEDs/m)	1800K	82	344 / 1130	12 in. (30.5 cm)	✓	✓	
			2000K	95	399 / 1309				
			2200K	106	445 / 1461				
			2400K	109	458 / 1502				
			2700K	122	512 / 1681				
			3000K	129	542 / 1778				
			3500K	132	554 / 1819				
			4000K	132	554 / 1819				
			6000K	126	529 / 1736				
0.75 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	41	22 / 71	12 in. (30.5 cm)	✓	✓	✓
			Green	175	92 / 301				
			Blue	19	10 / 33				
			Amber	34	18 / 59				
1.5 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	42	44 / 145	12 in. (30.5 cm)	✓	✓	✓
			Green	160	168 / 551				
			Blue	18	19 / 62				
			Amber	34	36 / 117				
2.2 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	42	65 / 212	12 in. (30.5 cm)	✓	✓	✓
			Green	145	223 / 733				
			Blue	18	28 / 91				
			Amber	34	52 / 172				
3.0 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	40	84 / 276	12 in. (30.5 cm)	✓	✓	✓
			Green	127	267 / 875				
			Blue	25	53 / 172				
			Amber	29	61 / 200				
4.4 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	38	117 / 384	12 in. (30.5 cm)	✓	✓	✓
			Green	117	360 / 1182				
			Blue	24	74 / 243				
			Amber	25	77 / 253				
5.0 Static Color Series 2	1.4 in. (35.7 mm)	68 LEDs/ft (224 LEDs/m)	Red	37	130 / 425	12 in. (30.5 cm)	✓	✓	
			Green	116	406 / 1332				
			Blue	24	84 / 276				
			Amber	26	91 / 299				
6.0 Static Color Series 2	1.4 in. (35.7 mm)	68 LEDs/ft (224 LEDs/m)	Red	37	155 / 510	12 in. (30.5 cm)	✓	✓	
			Green	113	475 / 1557				
			Blue	23	97 / 317				
			Amber	24	101 / 331				
1.0 Variable White Series 2	1.97 in. (50 mm)	42 LEDs/ft (140 LEDs/m)	2000K + 6500K	85	59.5 / 195	12 in. (30.5 cm)	✓	✓	✓
3.0 Variable White Series 2	1.97 in. (50 mm)	42 LEDs/ft (140 LEDs/m)	2000K + 6500K	80	168 / 551	12 in. (30.5 cm)	✓	✓	✓
6.0 Variable White Series 2	1.97 in. (50 mm)	42 LEDs/ft (140 LEDs/m)	2000K + 6500K	75	315 / 1033	12 in. (30.5 cm)	✓	✓	✓

SPECIFICATIONS

Available Wattages	Cuttable Length	LED Pitch	Color Temp.	lm/W without Lens	Delivered Lumens with Square Lens (lm/ft / lm/m)	Standard Cable Length	Compatible with Channel		
							IP20	IP65	IP68
2.2 RGB	6.55 in. (166.4 mm)	9 LEDs/ft (30 LEDs/m)	RGB	37	57 / 187	12 in. (30.5 cm)	✓	✓	
4.4 RGB	3.94 in. (100 mm)	18 LEDs/ft (60 LEDs/m)	RGB	37	57 / 187	12 in. (30.5 cm)	✓	✓	
4.4 RGBW	6.55 in. (166.4 mm)	18 LEDs/ft (60 LEDs/m)	RGBW	65	200 / 657	12 in. (30.5 cm)	✓	✓	
4.4 RGBA	6.55 in. (166.4 mm)	18 LEDs/ft (60 LEDs/m)	RGBA	33	102 / 333	12 in. (30.5 cm)	✓	✓	
5.5 4-in-1 RGBW	3.94 in. (100 mm)	18 LEDs/ft (60 LEDs/m)	RGBW	51	196 / 644	12 in. (30.5 cm)	✓	✓	
5.5 4-in-1 RGBA	3.94 in. (100 mm)	18 LEDs/ft (60 LEDs/m)	RGBA	27	104 / 341	12 in. (30.5 cm)	✓	✓	
5.2 Warm Dim	3.94 in. (100 mm)	36 LEDs/ft (120 LEDs/m)	WARM DIM	55	200 / 657	12 in. (30.5 cm)	✓	✓	

DIODE VISIBILITY CHART (Data below applies to installations with Milky lens only)

 No Visible Diode = N			 With Visible Diode = Y					
Static White & Static Color RibbonLyte			Color Changing RibbonLyte					
0.75/1.5/2.2	3.0/4.4	5.0/6.0	2.2 RGB	4.4 RGB	4.4 RGBW/A	5.5 4-in-1 RGBW/A	Warm Dim	Variable White
IP20 IP65 IP68	IP20 IP65 IP68	IP20 IP65	IP20 IP65	IP20 IP65	IP20 IP65	IP20 IP65	IP20 IP65	IP20 IP65 IP68
N	N	N	Y	N	N	N	N	N

AVAILABLE DRIVERS

NON-DIMMING ELECTRONIC DRIVERS



30W, 60W, 96W Non-Dimming Electronic Class 2 Drivers

Part No.:

- DRVW2430 (30 Watt)
- DRVW2460 (60 Watt)
- DRVW2496 (96 Watt)

Output Voltage: 24 V
Voltage Range: 120-277 VAC
IP Rating: Dry or Damp
UL Listed



240W, 320W Non-Dimming Electronic Drivers

Part No.:

- DRVW24240 (240 Watt)
- DRVW24320 (320 Watt)

Output Voltage: 24 V
Voltage Range: 90-305 VAC
IP Rating: Dry or Damp
UL Recognized



40W Lutron Hi-Lume 1% Dimming Class 2 Drivers

Part No.:

- DRVLUT24403W (40 Watt, 3-wire)
- DRVLUT24402W (40 Watt, 2-wire)

Output Voltage: 24 V
Voltage Range: 120-277 VAC (3-wire model)
or 120V (2-wire model)
IP Rating: Dry or Damp
Dimmable using 2-wire forward phase,
3-wire+G or digital EcoSystem
UL Listed



96W Lutron Hi-Lume Premier 0.1% Dimming Class 2 Driver

Part No.:

- DRVLUT24963W (96 Watt, 3-wire)

Output Voltage: 24 V
Voltage Range: 120-277 VAC
IP Rating: Dry or Damp
Dimmable using 3-wire+G or digital EcoSystem
0.1% dimming SoftOn/FadeToBlack
with EcoSystem
UL Listed

MAGNETIC, ELV & MLV DRIVERS WITH COMPATIBLE DIMMERS



120 VAC

60W, 96W, 200W, 300W Class 1 & 2 Magnetic Drivers

Part No.:

- DRVWDIM2460 (60 Watt)
- DRVWDIM24100 (96 Watt)
- DRVWDIM24200 (200 Watt)
- DRVWDIM24300 (300 Watt)

Magnetic Driver
Output Voltage: 24 V
Voltage Range: 120 VAC
IP Rating: Dry or Damp
Forward Phase Dimming
ETL Listed



277 VAC

60W, 96W, 200W, 300W Class 1 & 2 Magnetic Drivers

Part No.:

- DRVWDIM2460277 (60 Watt)
- DRVWDIM24100277 (96 Watt)
- DRVWDIM24200277 (200 Watt)
- DRVWDIM24300277 (300 Watt)

Magnetic Driver
Output Voltage: 24 V
Voltage Range: 277 VAC
IP Rating: Dry or Damp
Forward Phase Dimming
ETL Listed



60W, 96W, 150W, 200W ELV & MLV Drivers

Part No.:

- DRVW2460ELV (60 Watt)
- DRVW2496ELV (96 Watt)
- DRVW24150ELV (150 Watt)
- DRVW24200ELV (200 Watt)

Line Voltage Dimmable Drivers
Output Voltage: 24 V
Voltage Range: 100-130 VAC
IP Rating: Dry or Damp
Dimmable
ETL, UL and CSA Listed



LUTRON Skylark Contour Dimmer

Part No.: TRIDIMSKY
Width: 2.94 in (75 mm)
Length: 4.69 in (120 mm)
Depth: 0.30 in (7.6 mm)

- Single pole and 3-way versions
- Compatible with Acolyte MLV drivers
- Slide adjusts brightness and On/Off control
- 30 mA max control current
- Available in white finish



LUTRON NOVA-T Dimmer

Part No.: TRIDIMNOVA
Width: 2.75 in (70 mm)
Length: 4.56 in (116 mm)
Depth: 0.30 in (7.6 mm)

- Slide adjusts brightness and On/Off control
- 30 mA max control current
- Available in white finish



LUTRON DIVA Dimmer

Part No.: TRIDIMDIVA
(With Locator Light) TRIDIMDIVAL
Width: 2.94 in (75 mm)
Length: 4.69 in (120 mm)
Depth: 0.30 in (7.6 mm)

- Large paddle switch with a captive linear-slide dimmer
- 30 mA max control current
- Available in white finish
- Available with locator light which glows green when the switch is off

Note: For more options, please reference the Optional Dimmer List on Acolyte product website page.



AVAILABLE DRIVERS / CONTROLLERS AND DIMMING OPTIONS / WIRE GAUGE CHART

0-10V DRIVERS AND DIMMERS

DIMMING MODULE



0-10V Dimmable Waterproof Drivers

96W Part No.: DRVW249610P
288W Part No.: DRVW2428810P
Output Voltage: 24 V (+/- 0.5V)
Voltage Range: 100-277 VAC
Environmental Rating: UL Wet Location
UL Listed



LUTRON DIVA Dimmer

Part No.: LVDIMDIVA
Width: 2.94 in (75 mm)
Length: 4.69 in (120 mm)
Depth: 0.30 in (7.6 mm)

- Compatible with 0-10 V Dimming Module
- Large paddle switch with a captive linear-slide dimmer
- 30 mA max control current
- Available in white finish



LUTRON NOVA-T Dimmer

Part No.: LVDIMNOVA
Width: 2.75 in (70 mm)
Length: 4.56 in (116 mm)
Depth: 0.30 in (7.6 mm)

- Compatible with 0-10 V Dimming Module
- Slide adjusts brightness and On/Off control
- 30 mA max control current
- Available in white finish



Variable White Dimming Module

- Part No.: VWDIMMOD
- 1 dimming module required per 30 ft (9.1 m)
 - This product is only compatible with Variable White RibbonLyte, not Variable White Amber or Variable White Red. Works with any 0-10V dimmers to provide CCT change with one dimmer and brightness change with the other.

Note: Max length before additional power is introduced

DMX CONTROLLER AND PART NUMBER - FOR COLOR CHANGING VERSIONS



GLASS TOUCH
WALL CONTROLLER

Part Number: AWCRGBWW
AWCVWW



1 ZONE WALL CONTROLLER

Part Number: DMXCTRLG



5 ZONE WALL CONTROLLER

Part Number: DMXCTRL



10 ZONE WALL CONTROLLER

Part Number: DMXCTRLD



4 CHANNEL WATERPROOF
DMX INTERFACE

Part Number: DMXINFWLCD4



5 CHANNEL
DMX INTERFACE

Part Number: DMXINFLCD5



DMX OPTO SPLITTER


Part Number: DMXOS8

DRIVER AND RIBBONLYTE AT FULL LOAD


Wattages	30		60		96		150		200		240		300		320	
Wire Gauge	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
24 AWG	14	4.27	9	2.74	5.5	1.68	3.75	1.14	2.75	0.84	2.25	0.69	1.75	0.53	1.75	0.53
22 AWG	22	6.71	14	4.27	9	2.74	5.75	1.75	4.5	1.37	3.5	1.07	2.75	0.84	2.75	0.84
20 AWG	35	10.67	23	7.01	14	4.27	9	2.74	7	2.13	5.75	1.75	4.5	1.37	4.25	1.30
18 AWG	56	17.07	37	11.28	23	7.01	15	4.57	11	3.35	9	2.74	7.5	2.29	7	2.13
16 AWG	90	27.44	60	18.29	37	11.28	24	7.32	18	5.49	15	4.57	12	3.66	11	3.35
14 AWG	142	43.29	95	28.96	59	17.99	38	11.59	28	8.54	23	7.01	19	5.79	17	5.18
12 AWG	226	68.90	151	46.04	94	28.66	60	18.29	45	13.72	37	11.28	30	9.15	28	8.54
10 AWG	360	109.76	240	73.17	150	45.73	96	29.27	72	21.95	60	18.29	48	14.63	45	13.72
8 AWG	574	175.00	381	116.16	239	72.87	153	46.65	115	35.06	95	28.96	76	23.17	71	21.65

WIRING DIAGRAMS


0-10V

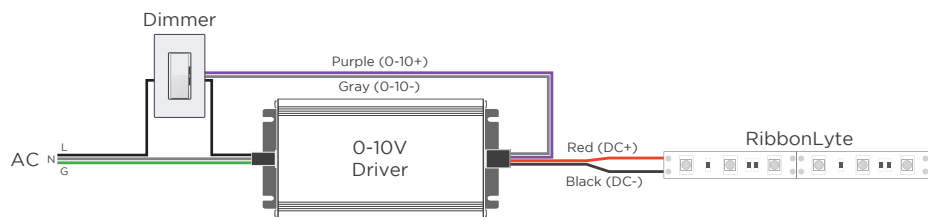


MLV / ELV

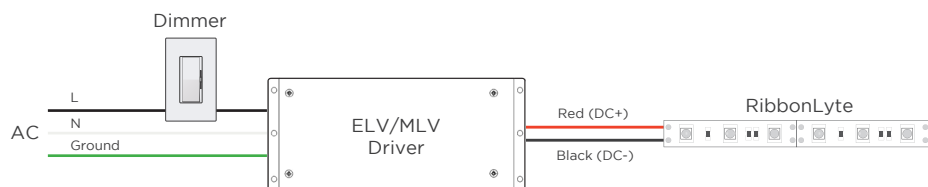


DMX

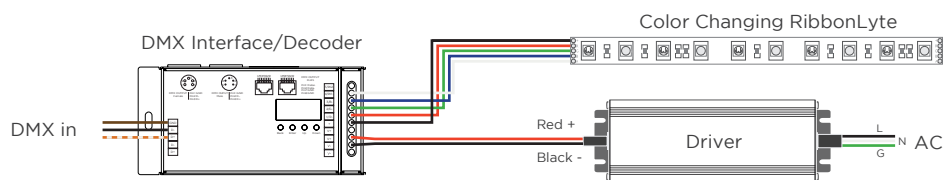


WARM DIM

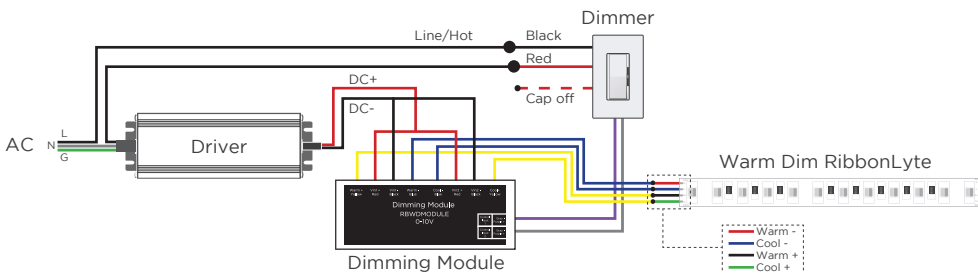

2-CHANNEL VARIABLE WHITE DIMMING

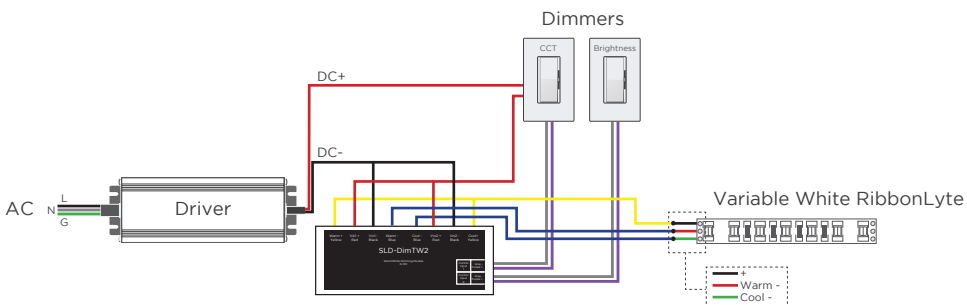

DMX WIRING DIAGRAM - COMPATIBLE WITH ALL MODELS OF VARIABLE WHITE RIBBONLYTE

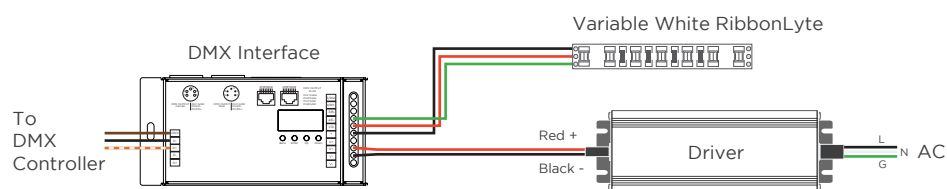

WIRE COLORS PER RIBBONLYTE COLOR

STATIC WHITE + STATIC COLOR

Red Wire (+) Positive
Black Wire (-) Negative

RGB

Black Wire (+) Positive
Red Wire (-) goes to Red Channel
Green Wire (-) goes to Green Channel
Blue Wire (-) goes to Blue Channel

RGBW/A

Black Wire (+) Positive
Red Wire (-) goes to Red Channel
Green Wire (-) goes to Green Channel
Blue Wire (-) goes to Blue Channel
White Wire (-) goes to White Channel

WARM DIM

Red Wire (-) goes to Warm White Channel
Blue Wire (-) goes to Cool White Channel
Black Wire (+) goes to Warm White Channel
Green Wire (+) goes to Cool White Channel

VARIABLE WHITE

Black Wire (+) Positive
Red Wire (-) goes to Warm White Channel
Green Wire (-) goes to Cool White Channel