

AW14 CHANNEL FIXTURE

AW14 channel fixture is an aluminum profile designed for decorative lighting in walls and ceilings. AW14 lets you create coves or unique lines of light. Choose from clear, milky or black lenses and create custom fixtures with AW14 channel and our RibbonLyte products.

- Available for field assembly or factory assembly
- 0.69 in. (17.4 mm) wide by 1.31 in. (33.4 mm) deep
- 90-degree beam angle
- Wattage Range from 0.75 W/ft (2.46 W/m) to 8.8 W/ft (28.9 W/m)
- Static White delivered lumen range from 44 lm/ft (145 lm/m) up to 737 lm/ft (2417 lm/m)
- Clear Lens, Milky Lens or Black Lens



HOUSING FINISHES



Silver Standard White* Custom RAL*

*Additional fee applies

LENS FINISHES




Clear Lens 93% Light Transmission
Milky Lens 75% Light Transmission
Black Lens** 70% Light Transmission

**Our black lens offers great diffusion and helps hide fixtures that aren't in use.




AVAILABLE COLORS & COLOR TEMPERATURES



DIMENSIONS

AW14 Channel



Width: 0.69 in. (17.4 mm)
Height: 1.31 in. (33.4 mm)
Internal Width: 0.58 in. (14.8 mm)
Internal Height: 0.63 in. (16 mm)

Note:

1. This channel does not require mounting clips. Please see our installation guide for instructions.
2. **Exterior channel applications** should be securely attached to the mounting surface with appropriate screws and/or liquid nails. Acolyte strongly recommends field assembly for exterior applications.


Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

SPECIFICATIONS

| | |
|--------------------------------|--|
| Beam Angle | 90° |
| Lens Type | Clear Lens, Milky Lens, Black Lens |
| Length | Channel is sold by the foot and cut to your exact desired length |
| Operating Voltage | 24V |
| Dimming | MLV / 0-10 Volt / ELV / DALI / DMX |
| Operating Temperature | -40° F to 158° F (-40° C to 70° C) |
| Colors | 1800K, 2000K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 6000K, Red, Amber, Green, Blue, RGBA, RGBW, RGBWW, VW, Warm Dim (1800K, 2000K, 2200K only available in IP20) |
| CRI | 90+ CRI (Static white only) |
| Lamp Life | L70 at 50,000 Hours |
| MacAdam Ellipses (SDCM) | 2-Step Binning (For Static White LEDs only) |
| Certifications | UL Listed UL 2108 Issued: 2004/02/27 Ed: 1 Rev: 2014/02/24 Low Voltage Lighting Systems CSA C22.2#9.0 Issued: 1996/06/01 Ed: 1 (R2011) General Requirements for Luminaries; with Gen. Inst. 1: 1997, Gen Inst. 2: 1998. ROHS compliant |

ACCESSORIES (SEE PART NUMBERS AT STEP 4 ON PAGE 3)

180° Coupler

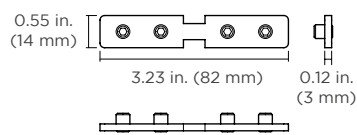

ORDERING GUIDE

STEP 1 Complete Channel Part Number

| CHANNEL | LENS | HOUSING COLOR |
|-----------------------|---|--|
| CHAW14 | | |
| CHAW14 - AW14 Channel | C - Clear Lens M - Milky Lens BK - Black Lens | SV - Silver WH - White Consult factory for custom colors |

STEP 2 Complete RibbonLyte Part Number

| CATEGORY | CRI | RIBBON TYPE & IP RATING | | |
|-----------------|---|--|---|--|
| RB | | | | |
| RB - RibbonLyte | 0 - Static Color, Color Changing 90 - 90+ CRI Static White | LINEA20 - Linea RibbonLyte IP20 SWS220 - Static White Series 2 IP20 SWS265 - Static White Series 2 IP65 SCS220 - Static Color Series 2 IP20 SCS265 - Static Color Series 2 IP65 RGBWW20 - RGBWW 5-in-1 IP20 | RGBWS220 - RGBW Series 2 IP20 RGBWS265 - RGBW Series 2 IP65 VWS220 - VW Series 2 IP20 VWS265 - VW Series 2 IP65 VWS268 - VW Series 2 IP68 | WD20 - Warm Dim IP20 WD65 - Warm Dim IP65 WD68 - Warm Dim IP68 |


NOTE: To ensure waterproofing standards are met, IP65 and IP68 RibbonLyte can NOT be cut in the field.

| WATTAGE | COLOR | |
|---|------------|--|
| 0.75 - 0.75 W/ft (2.46 W/m - Static White, Static Color) | 18 - 1800K | RGB27 - Red, Green, Blue + 2700K |
| 1.0 - 1.0 W/ft (3.3 W/m - Variable White) | 20 - 2000K | RGB30 - Red, Green, Blue + 3000K |
| 1.5 - 1.5 W/ft (4.9 W/m - Static White, Static Color) | 22 - 2200K | RGB40 - Red, Green, Blue + 4000K |
| 2.2 - 2.2 W/ft (7.2 W/m - Static White, Static Color) | 24 - 2400K | RGB2465 - Red, Green, Blue + 2400K + 6500K |
| 2.4 - 2.4 W/ft (8 W/m - Static White) | 27 - 2700K | RGBA - Red, Green, Blue + Amber |
| 3.0 - 3.0 W/ft (9.8 W/m - Static White, Static Color, Variable White) | 30 - 3000K | VW - Variable White |
| 4.3 - 4.3 W/ft (14 W/m - Static White) | 35 - 3500K | 2920 - Warm Dim 2900K-2000K (IP20) |
| 4.4 - 4.4 W/ft (14.4 W/m - Static White, Static Color, RGBW, RGBWW, RGBA) | 40 - 4000K | 2721 - Warm Dim 2900K-2000K (IP65) |
| 5.2 - 5.2 W/ft (17.1 W/m - Warm Dim) | 60 - 6000K | Z - Undecided** |
| 5.0 - 5.0 W/ft (16.4 W/m - Static White, Static Color) | R - Red | ** For quotes only. Must be chosen before final order. |
| 5.5 - 5.5 W/ft (18.0 W/m - RGBW, RGBA) | A - Amber | |
| 6.0 - 6.0 W/ft (19.7 W/m - Static White, Static Color, Variable White) | G - Green | |
| 6.1 - 6.1 W/ft (20 W/m - Variable White) | B - Blue | |
| 8.8 - 8.8 W/ft (28.86 W/m - RGBW, RGBWW, RGBA) | | |

CONNECTION OPTIONS (See diagrams on the right)

- 1 - End Feed Bare Wire Connection
- 2 - Back Feed Bare Wire Connection
- 3 - Side Feed Bare Wire Connection
- 4 - End Feed with IP67 Male Coupler
- 5 - Soldered Daisy Chain
- 6 - Daisy Chain With IP67 Couplers

Custom Length (ft.)

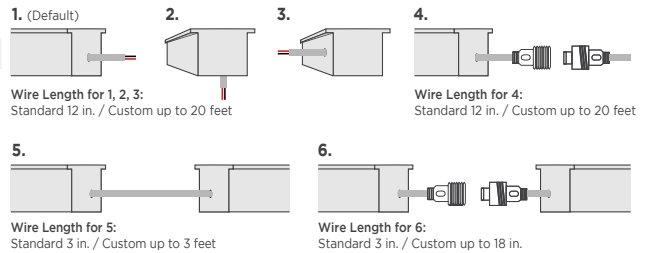


STEP 3 Complete Assembly Option & Length

| ASSEMBLY OPTION | LENGTH (Standard factory assembled length up to 6 ft 6.7 in. / 2 m) |
|--|---|
| FI - Field Assembly | |
| FA - Factory Assembly* (not recommended for exterior applications) | |

* Factory assembled runs exceeding 6 ft 6.7 in. (2 m) will be split into multiple daisy chained fixtures.

DO NOT BUTT END CAPS AGAINST EACH OTHER WHEN CREATING LONGER FIXTURES

Acolyte STRONGLY SUGGESTS field assembly (without using interior end caps) for direct-view fixtures of more than 6 ft 6.7 in. (2 m) in length. Field assembly without interior end caps will eliminate gaps or dead spots that can be caused by butting interior end caps against each other.

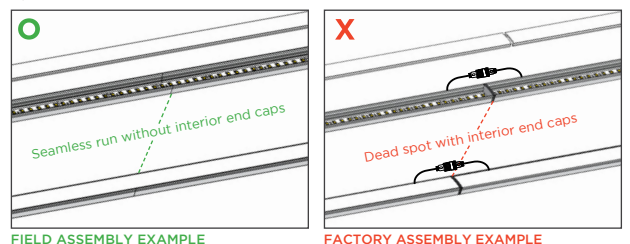

STEP 4 Add Accessories

| ACCESSORIES |
|--------------------------|
| CHCOU180Q - 180° Coupler |

RIBBONLYTE SPECIFICATIONS & COMPATIBILITY

| Available Wattages | Cutttable Length | LED Pitch | Color Temp. | lm/W without Lens | Delivered Lumens with Clear Lens (lm/ft / lm/m) | Delivered Lumens with Milky Lens (lm/ft / lm/m) | Delivered Lumens with Black Lens (lm/ft / lm/m) | Max Length | Compatible with Channel | | |
|----------------------------|-------------------|-------------------------|-------------|-------------------|---|---|---|--|-------------------------|------|------|
| | | | | | | | | | IP20 | IP65 | IP68 |
| 0.75 Static White Series 2 | 1.97 in. (50 mm) | 48 LEDs/ft (160 LEDs/m) | 1800K | 84 | 59 / 192 | 47 / 155 | 44 / 145 | IP20: 49 ft (15 m) IP65/IP68: 32.8 ft (10 m) | ✓ | ✓ | ✓ |
| | | | 2000K | 99 | 69 / 227 | 56 / 183 | 52 / 171 | | | | |
| | | | 2200K | 109 | 76 / 249 | 61 / 201 | 57 / 188 | | | | |
| | | | 2400K | 113 | 79 / 259 | 64 / 209 | 59 / 195 | | | | |
| | | | 2700K | 123 | 86 / 281 | 69 / 227 | 65 / 212 | | | | |
| | | | 3000K | 123 | 86 / 281 | 69 / 227 | 65 / 212 | | | | |
| | | | 3500K | 130 | 91 / 297 | 73 / 240 | 68 / 224 | | | | |
| | | | 4000K | 134 | 93 / 307 | 75 / 247 | 70 / 231 | | | | |
| | | | 6000K | 131 | 91 / 300 | 74 / 242 | 69 / 226 | | | | |
| 1.5 Static White Series 2 | 1.97 in. (50 mm) | 48 LEDs/ft (160 LEDs/m) | 1800K | 84 | 117 / 384 | 95 / 310 | 88 / 289 | IP20: 49 ft (15 m) IP65/IP68: 32.8 ft (10 m) | ✓ | ✓ | ✓ |
| | | | 2000K | 98 | 137 / 384 | 110 / 362 | 103 / 338 | | | | |
| | | | 2200K | 109 | 152 / 499 | 123 / 402 | 114 / 375 | | | | |
| | | | 2400K | 113 | 158 / 517 | 127 / 417 | 119 / 389 | | | | |
| | | | 2700K | 123 | 172 / 563 | 138 / 454 | 129 / 424 | | | | |
| | | | 3000K | 123 | 172 / 563 | 138 / 454 | 129 / 424 | | | | |
| | | | 3500K | 129 | 180 / 590 | 145 / 476 | 135 / 444 | | | | |
| | | | 4000K | 134 | 187 / 613 | 151 / 495 | 141 / 462 | | | | |
| | | | 6000K | 131 | 183 / 600 | 147 / 484 | 138 / 451 | | | | |
| 2.2 Static White Series 2 | 1.97 in. (50 mm) | 48 LEDs/ft (160 LEDs/m) | 1800K | 83 | 170 / 557 | 137 / 449 | 128 / 419 | IP20: 42 ft (12.8 m) IP65/IP68: 32.8 ft (10 m) | ✓ | ✓ | ✓ |
| | | | 2000K | 96 | 196 / 644 | 158 / 520 | 148 / 485 | | | | |
| | | | 2200K | 106 | 217 / 712 | 175 / 574 | 163 / 536 | | | | |
| | | | 2400K | 111 | 227 / 745 | 183 / 601 | 171 / 561 | | | | |
| | | | 2700K | 120 | 246 / 806 | 198 / 650 | 185 / 606 | | | | |
| | | | 3000K | 122 | 250 / 819 | 201 / 660 | 188 / 616 | | | | |
| | | | 3500K | 127 | 260 / 852 | 210 / 687 | 196 / 642 | | | | |
| | | | 4000K | 133 | 272 / 893 | 219 / 720 | 205 / 672 | | | | |
| | | | 6000K | 128 | 262 / 859 | 211 / 693 | 197 / 647 | | | | |
| 3.0 Static White Series 2 | 1.97 in. (50 mm) | 48 LEDs/ft (160 LEDs/m) | 1800K | 84 | 234 / 769 | 189 / 620 | 176 / 579 | IP20: 36 ft (11 m) IP65/IP68: 32.8 ft (10 m) | ✓ | ✓ | ✓ |
| | | | 2000K | 98 | 273 / 897 | 221 / 723 | 206 / 675 | | | | |
| | | | 2200K | 108 | 301 / 989 | 243 / 797 | 227 / 744 | | | | |
| | | | 2400K | 109.8 | 306 / 1005 | 247 / 811 | 231 / 756 | | | | |
| | | | 2700K | 122.9 | 343 / 1125 | 277 / 907 | 258 / 847 | | | | |
| | | | 3000K | 130 | 363 / 1190 | 293 / 960 | 273 / 896 | | | | |
| | | | 3500K | 133 | 371 / 1217 | 299 / 982 | 279 / 916 | | | | |
| | | | 4000K | 133 | 371 / 1217 | 299 / 982 | 279 / 916 | | | | |
| | | | 6000K | 128 | 357 / 1172 | 288 / 945 | 269 / 882 | | | | |
| 4.4 Static White Series 2 | 1.97 in. (50 mm) | 48 LEDs/ft (160 LEDs/m) | 1800K | 81 | 331 / 1087 | 267 / 877 | 249 / 818 | 28 ft 4 in. (8.64 m) | ✓ | ✓ | ✓ |
| | | | 2000K | 95 | 389 / 1275 | 314 / 1029 | 293 / 960 | | | | |
| | | | 2200K | 105 | 430 / 1410 | 347 / 1137 | 323 / 1061 | | | | |
| | | | 2400K | 109 | 446 / 1463 | 360 / 1180 | 336 / 1101 | | | | |
| | | | 2700K | 122 | 499 / 1638 | 403 / 1321 | 376 / 1233 | | | | |
| | | | 3000K | 129 | 528 / 1732 | 426 / 1397 | 397 / 1304 | | | | |
| | | | 3500K | 132 | 540 / 1772 | 436 / 1429 | 407 / 1334 | | | | |
| | | | 4000K | 132 | 540 / 1772 | 436 / 1429 | 407 / 1334 | | | | |
| | | | 6000K | 126 | 516 / 1692 | 416 / 1364 | 388 / 1273 | | | | |
| 5.0 Static White Series 2 | 1.4 in. (35.7 mm) | 68 LEDs/ft (224 LEDs/m) | 1800K | 83 | 386 / 1266 | 311 / 1021 | 291 / 953 | IP20: 33 ft 4 in. (10.1 m) IP65: 32.8 ft (10 m) | ✓ | ✓ | |
| | | | 2000K | 98 | 456 / 1495 | 368 / 1206 | 343 / 1125 | | | | |
| | | | 2200K | 107 | 498 / 1632 | 401 / 1316 | 375 / 1229 | | | | |
| | | | 2400K | 110 | 511 / 1675 | 412 / 1351 | 384 / 1261 | | | | |
| | | | 2700K | 123 | 571 / 1875 | 461 / 1512 | 430 / 1411 | | | | |
| | | | 3000K | 130 | 605 / 1983 | 488 / 1599 | 455 / 1493 | | | | |
| | | | 3500K | 133 | 618 / 2029 | 499 / 1636 | 466 / 1527 | | | | |
| | | | 4000K | 133 | 618 / 2029 | 499 / 1636 | 466 / 1527 | | | | |
| | | | 6000K | 127 | 591 / 1937 | 476 / 1562 | 445 / 1458 | | | | |
| 6.0 Static White Series 2 | 1.4 in. (35.7 mm) | 68 LEDs/ft (224 LEDs/m) | 1800K | 82 | 458 / 1501 | 369 / 1211 | 344 / 1130 | 28 ft (8.5 m) | ✓ | ✓ | |
| | | | 2000K | 95 | 530 / 1739 | 428 / 1403 | 399 / 1309 | | | | |
| | | | 2200K | 106 | 591 / 1941 | 477 / 1565 | 445 / 1461 | | | | |
| | | | 2400K | 109 | 608 / 1995 | 491 / 1609 | 458 / 1502 | | | | |
| | | | 2700K | 122 | 681 / 2233 | 549 / 1801 | 512 / 1681 | | | | |
| | | | 3000K | 129 | 720 / 2362 | 581 / 1905 | 542 / 1778 | | | | |
| | | | 3500K | 132 | 737 / 2417 | 594 / 1949 | 554 / 1819 | | | | |
| | | | 4000K | 132 | 737 / 2417 | 594 / 1949 | 554 / 1819 | | | | |
| | | | 6000K | 126 | 703 / 2307 | 567 / 1860 | 529 / 1736 | | | | |

RIBBONLYTE SPECIFICATIONS & COMPATIBILITY

| Available Wattages | Cuttable Length | LED Pitch | Color Temp. | lm/W without Lens | Delivered Lumens with Clear Lens (lm/ft / lm/m) | Delivered Lumens with Milky Lens (lm/ft / lm/m) | Delivered Lumens with Black Lens (lm/ft / lm/m) | Max Length | Compatible with Channel | | |
|----------------------------|---------------------|--------------------------|---------------|-------------------|---|---|---|--|-------------------------|------|------|
| | | | | | | | | | IP20 | IP65 | IP68 |
| 0.75 Static Color Series 2 | 1.97 in. (50 mm) | 48 LEDs/ft (160 LEDs/m) | Red | 41 | 29 / 94 | 23 / 76 | 22 / 71 | IP20: 49 ft (15 m) IP65/ IP68: 32.8 ft (10 m) | ✓ | ✓ | ✓ |
| | | | Green | 175 | 122 / 400 | 98 / 323 | 92 / 301 | | | | |
| | | | Blue | 19 | 13 / 43 | 11 / 35 | 10 / 33 | | | | |
| | | | Amber | 34 | 24 / 78 | 19 / 63 | 18 / 59 | | | | |
| 1.5 Static Color Series 2 | 1.97 in. (50 mm) | 48 LEDs/ft (160 LEDs/m) | Red | 42 | 59 / 192 | 47 / 155 | 44 / 145 | IP20: 49 ft (15 m) IP65/ IP68: 32.8 ft (10 m) | ✓ | ✓ | ✓ |
| | | | Green | 160 | 223 / 732 | 180 / 591 | 168 / 551 | | | | |
| | | | Blue | 18 | 25 / 82 | 20 / 66 | 19 / 62 | | | | |
| | | | Amber | 34 | 47 / 156 | 38 / 125 | 36 / 117 | | | | |
| 2.2 Static Color Series 2 | 1.97 in. (50 mm) | 48 LEDs/ft (160 LEDs/m) | Red | 42 | 86 / 282 | 69 / 227 | 65 / 212 | IP20: 42 ft (12.8 m) IP65/ IP68: 32.8 ft (10 m) | ✓ | ✓ | ✓ |
| | | | Green | 145 | 297 / 973 | 239 / 785 | 223 / 733 | | | | |
| | | | Blue | 18 | 37 / 121 | 30 / 97 | 28 / 91 | | | | |
| | | | Amber | 34 | 70 / 228 | 56 / 184 | 52 / 172 | | | | |
| 3.0 Static Color Series 2 | 1.97 in. (50 mm) | 48 LEDs/ft (160 LEDs/m) | Red | 40 | 112 / 366 | 90 / 295 | 84 / 267 | 32.8 ft (10 m) | ✓ | ✓ | ✓ |
| | | | Green | 127 | 354 / 1162 | 286 / 937 | 267 / 875 | | | | |
| | | | Blue | 25 | 70 / 229 | 56 / 185 | 53 / 172 | | | | |
| | | | Amber | 29 | 81 / 265 | 65 / 214 | 61 / 200 | | | | |
| 4.4 Static Color Series 2 | 1.97 in. (50 mm) | 48 LEDs/ft (160 LEDs/m) | Red | 38 | 155 / 510 | 125 / 411 | 117 / 384 | 29 ft (8.8 m) | ✓ | ✓ | ✓ |
| | | | Green | 117 | 479 / 1571 | 386 / 1267 | 360 / 1182 | | | | |
| | | | Blue | 24 | 98 / 322 | 79 / 260 | 74 / 243 | | | | |
| | | | Amber | 25 | 102 / 336 | 83 / 271 | 77 / 253 | | | | |
| 5.0 Static Color Series 2 | 1.4 in. (35.7 mm) | 68 LEDs/ft (224 LEDs/m) | Red | 37 | 172 / 564 | 139 / 455 | 130 / 425 | 30 ft (9.14 m) | ✓ | ✓ | |
| | | | Green | 116 | 539 / 1770 | 435 / 1427 | 406 / 1332 | | | | |
| | | | Blue | 24 | 112 / 366 | 90 / 295 | 84 / 276 | | | | |
| | | | Amber | 26 | 121 / 397 | 98 / 320 | 91 / 299 | | | | |
| 6.0 Static Color Series 2 | 1.4 in. (35.7 mm) | 68 LEDs/ft (224 LEDs/m) | Red | 37 | 206 / 677 | 167 / 546 | 155 / 510 | 28 ft (8.5 m) | ✓ | ✓ | |
| | | | Green | 113 | 631 / 2069 | 509 / 1668 | 475 / 1557 | | | | |
| | | | Blue | 23 | 128 / 421 | 104 / 340 | 97 / 317 | | | | |
| | | | Amber | 24 | 134 / 439 | 108 / 354 | 101 / 331 | | | | |
| 2.4 Static White Linea | 1.97 in. (50 mm) | 146 LEDs/ft (480 LEDs/m) | 2700K | 67 | 149.7 / 491 | 120.8 / 396 | 112.7 / 369.6 | 21.3 ft (6.5 m) | ✓ | N/A | N/A |
| | | | 3000K | 71 | 158.1 / 519.9 | 127.5 / 419.3 | 119 / 391.3 | | | | |
| | | | 3500K | 83 | 185.1 / 608.2 | 149.3 / 490.5 | 139.3 / 457.8 | | | | |
| | | | 4000K | 83 | 185.1 / 608.2 | 149.3 / 490.5 | 139.3 / 457.8 | | | | |
| 3.0 Static White Linea | 1.97 in. (50 mm) | 146 LEDs/ft (480 LEDs/m) | 2700K | 66 | 184.1 / 604.5 | 148.5 / 487.5 | 138.6 / 455 | 21.3 ft (6.5 m) | ✓ | N/A | N/A |
| | | | 3000K | 73 | 203.7 / 668.7 | 164.3 / 539.3 | 153.3 / 503.3 | | | | |
| | | | 3500K | 78 | 217.6 / 714.2 | 175.5 / 576 | 163.8 / 537.6 | | | | |
| | | | 4000K | 83 | 231.6 / 759.8 | 186.8 / 612.8 | 174.3 / 571.9 | | | | |
| 4.3 Static White Linea | 1.97 in. (50 mm) | 146 LEDs/ft (480 LEDs/m) | 2700K | 75 | 300.4 / 983.9 | 242.3 / 793.5 | 226.1 / 740.6 | 24.6 ft (7.5 m) | ✓ | N/A | N/A |
| | | | 3000K | 78 | 311.6 / 023 | 251.3 / 825 | 234.5 / 770 | | | | |
| | | | 3500K | 86 | 344.1 / 129 | 277.5 / 910.5 | 259 / 849.8 | | | | |
| | | | 4000K | 86 | 344.1 / 29 | 277.5 / 910.5 | 259 / 849.8 | | | | |
| 6.1 Variable White Linea | 1.09 in. (27.78 mm) | 175 LEDs/ft (576 LEDs/m) | 2700K + 6500K | 95 | 539.4 / 1769.8 | 435 / 427.3 | 406 / 332.1 | 16.4 ft (5 m) | ✓ | N/A | N/A |

RIBBONLYTE SPECIFICATIONS & COMPATIBILITY

| Available Wattages | Cuttable Length | LED Pitch | Color Temp. | lm/W without Lens | Delivered Lumens with Clear Lens (lm/ft / lm/m) | Delivered Lumens with Milky Lens (lm/ft / lm/m) | Delivered Lumens with Black Lens (lm/ft / lm/m) | Max Length | Compatible with Channel | | |
|-----------------------------|--------------------|-------------------------|---------------|-------------------|---|---|---|--|-------------------------|------|------|
| | | | | | | | | | IP20 | IP65 | IP68 |
| 1.0 Variable White Series 2 | 1.97 in. (50 mm) | 42 LEDs/ft (140 LEDs/m) | 2000K + 6500K | 85 | 79 / 259 | 64 / 209 | 60 / 195 | 32.8 ft (10 m) | ✓ | ✓ | ✓ |
| 3.0 Variable White Series 2 | 1.97 in. (50 mm) | 42 LEDs/ft (140 LEDs/m) | 2000K + 6500K | 80 | 223 / 732 | 180 / 591 | 168 / 551 | 32.8 ft (10 m) | ✓ | ✓ | |
| 6.0 Variable White Series 2 | 1.97 in. (50 mm) | 42 LEDs/ft (140 LEDs/m) | 2000K + 6500K | 75 | 419 / 1373 | 338 / 1107 | 315 / 1033 | 19 ft 8 in. (6 m) | ✓ | ✓ | ✓ |
| 4.4 RGBW Series 2 | 1.97 in. (50 mm) | 36 LEDs/ft (120 LEDs/m) | RGBW | 45 | 188.1 / 617.2 | 148.5 / 487.2 | 138.6 / 454.7 | 19 ft 8 in. (6 m) | ✓ | N/A | N/A |
| 5.5 RGBW Series 2 | 1.97 in. (50 mm) | 36 LEDs/ft (120 LEDs/m) | RGBW | 59 | 308.8 / 1013.0 | 243.3 / 798.5 | 227.2 / 745.3 | IP65: 16 ft 4 in. (5 m) IP68: 19 ft 7.9 in. (6 m) | N/A | ✓ | |
| 8.8 RGBW Series 2 | 1.97 in. (50 mm) | 36 LEDs/ft (120 LEDs/m) | RGBW | 61 | 510.2 / 1673.8 | 402.6 / 1320.9 | 375.8 / 1232.9 | 16 ft 4 in. (5 m) | ✓ | N/A | N/A |
| 4.4 5-in-1 RGBWW | 2.46 in. (62.5 mm) | 29 LED/ft (96 LED/m) | RGBWW | 59 | 241.4 / 792.1 | 194.7 / 638.8 | 181.7 / 596.2 | 16 ft 4 in (5 m) | ✓ | N/A | N/A |
| 8.8 5-in-1 RGBWW | 2.46 in. (62.5 mm) | 29 LED/ft (96 LED/m) | RGBWW | 50 | 409.2 / 1342.6 | 330.0 / 1082.7 | 308.0 / 1010.5 | 11 ft 6 in (3.5 m) | ✓ | N/A | N/A |
| 5.2 Warm Dim | 3.94 in. (100 mm) | 36 LEDs/ft (120 LEDs/m) | WARM DIM | 55 | 266 / 873 | 215 / 704 | 200 / 657 | 16 ft 4 in. (5 m) | ✓ | ✓ | ✓ |

DIODE VISIBILITY CHART (Data below applies to installations with Milky lens only)

|  <p>No Visible Diode = N Note: Linea RibbonLyte has no visible diode</p> | | |  <p>With Visible Diode = Y</p> | | | | | | | | |
|--|----------------------|--------------|---|-------------------|-------------------|------------------|------------------|--------------|----------|----------------|----------|
| Static White & Static Color RibbonLyte | | | Color Changing RibbonLyte | | | | | | | | |
| 0.75/1.5/2.2 | 3.0/4.4 | 5.0/6.0 | 4.4 RGBW Series 2 | 5.5 RGBW Series 2 | 8.8 RGBW Series 2 | 4.4 5-in-1 RGBWW | 8.8 5-in-1 RGBWW | Warm Dim | | Variable White | |
| IP20 IP65 IP68 | IP20 IP65 IP68 | IP20 IP65 | IP20 | IP65 | IP20 | IP20 | IP20 | IP20 IP65 | IP68 | IP20 IP65 | IP68 |
| N | N | N | N | N | Y | Y | Y | N | Y | N | Y |

AVAILABLE DRIVERS / CONTROLLERS AND DIMMING OPTIONS / WIRE GAUGE CHART

NON-DIMMING ELECTRONIC DRIVERS

ELV & MLV DRIVERS



30W, 60W, 96W
Non-Dimming Electronic
Class 2 Drivers

Part No.:
• DRVW2430 (30 Watt)
• DRVW2460 (60 Watt)
• DRVW2496 (96 Watt)
Output Voltage: 24 V
Voltage Range: 120-277 VAC
IP Rating: Dry or Damp
UL Listed



240W, 320W
Non-Dimming
Electronic Drivers

Part No.:
• DRVW24240 (240 Watt)
• DRVW24320 (320 Watt)
Output Voltage: 24 V
Voltage Range: 90-305 VAC
IP Rating: Dry or Damp
UL Recognized



60W, 96W, 150W, 300W, 600W
ELV/MLV Dimmable Drivers

Part No.:
• DRVW2460ELVMLV (60 Watt)
• DRVW2496ELVMLV (96 Watt)
• DRVW24150ELVMLV (150 Watt)
• DRVW24300ELVMLV (300 Watt)
Line Voltage Dimmable Drivers
Output Voltage: 24 V
Voltage Range: 100-277 VAC
IP Rating: IP67
UL, CE, and CSA Listed

0-10V DRIVERS



0-10V Dimmable Waterproof Drivers

96W Part No.: DRVW249610P
288W Part No.: DRVW2428810P
Output Voltage: 24 V (+/- 0.5V)
Voltage Range: 100-277 VAC
Environmental Rating: UL Wet Location
UL Listed



0-10V Dimmable 90W VW/WD Driver

Part No.: DRVRFWDVW2490120

DMX CONTROLLER AND PART NUMBER - FOR COLOR CHANGING VERSIONS



GLASS TOUCH WALL CONTROLLERS
Part Number: AWCRCBWWBK
AWCVWBK




1 ZONE WALL CONTROLLER
Part Number: DMXCTRLG



5 ZONE WALL CONTROLLER
Part Number: DMXCTRL



10 ZONE WALL CONTROLLER
Part Number: DMXCTRLD



2 UNIVERSE DMX CONTROLLER
Part Number: DMXCTRLDR2U



4 CHANNEL WATERPROOF DMX INTERFACE
Part Number: DMXINFWLCD4



5 CHANNEL DMX INTERFACE
Part Number: DMXINFOLED5



DMX OPTO SPLITTER
Part Number: DMXOS8


6 UNIVERSE DMX CONTROLLER
Part Number: DMXCTRLDR6U

DRIVER AND RIBBONLYTE AT FULL LOAD


| Wattages | 30 | | 60 | | 96 | | 150 | | 200 | | 240 | | 300 | | 320 | | |
|-------------------------------|------------|--------|--------|--------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|--------|
| | Wire Gauge | Feet | Meters | Feet | Meters | Feet | Meters | Feet | Meters | Feet | Meters | Feet | Meters | Feet | Meters | Feet | Meters |
| 24 AWG / 0.25 mm ² | 14 | 4.27 | 9 | 2.74 | 5.5 | 1.68 | 3.75 | 1.14 | 2.75 | 0.84 | 2.25 | 0.69 | 1.75 | 0.53 | 1.75 | 0.53 | 0.53 |
| 22 AWG / 0.34 mm ² | 22 | 6.71 | 14 | 4.27 | 9 | 2.74 | 5.75 | 1.75 | 4.5 | 1.37 | 3.5 | 1.07 | 2.75 | 0.84 | 2.75 | 0.84 | 0.84 |
| 20 AWG / 0.5 mm ² | 35 | 10.67 | 23 | 7.01 | 14 | 4.27 | 9 | 2.74 | 7 | 2.13 | 5.75 | 1.75 | 4.5 | 1.37 | 4.25 | 1.30 | 1.30 |
| 18 AWG / 0.75 mm ² | 56 | 17.07 | 37 | 11.28 | 23 | 7.01 | 15 | 4.57 | 11 | 3.35 | 9 | 2.74 | 7.5 | 2.29 | 7 | 2.13 | 2.13 |
| 16 AWG / 1.5 mm ² | 90 | 27.44 | 60 | 18.29 | 37 | 11.28 | 24 | 7.32 | 18 | 5.49 | 15 | 4.57 | 12 | 3.66 | 11 | 3.35 | 3.35 |
| 14 AWG / 2.5 mm ² | 142 | 43.29 | 95 | 28.96 | 59 | 17.99 | 38 | 11.59 | 28 | 8.54 | 23 | 7.01 | 19 | 5.79 | 17 | 5.18 | 5.18 |
| 12 AWG / 4 mm ² | 226 | 68.90 | 151 | 46.04 | 94 | 28.66 | 60 | 18.29 | 45 | 13.72 | 37 | 11.28 | 30 | 9.15 | 28 | 8.54 | 8.54 |
| 10 AWG / 6 mm ² | 360 | 109.76 | 240 | 73.17 | 150 | 45.73 | 96 | 29.27 | 72 | 21.95 | 60 | 18.29 | 48 | 14.63 | 45 | 13.72 | 13.72 |
| 8 AWG / 10 mm ² | 574 | 175.00 | 381 | 116.16 | 239 | 72.87 | 153 | 46.65 | 115 | 35.06 | 95 | 28.96 | 76 | 23.17 | 71 | 21.65 | 21.65 |

WIRING DIAGRAMS


0-10V

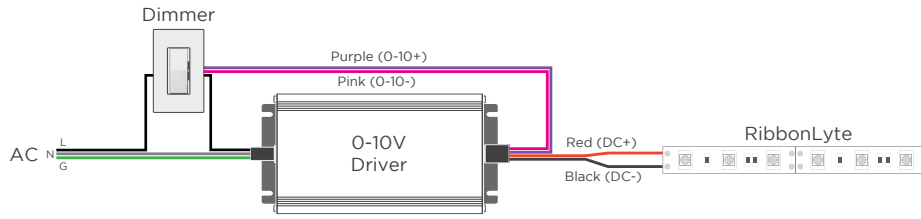


MLV / ELV

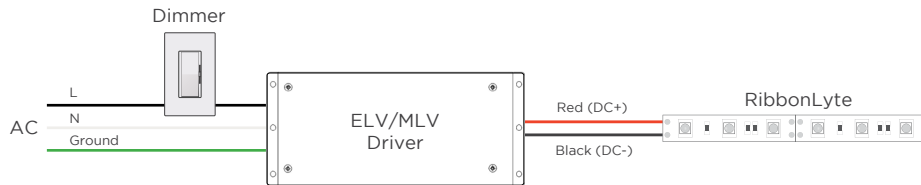


DMX

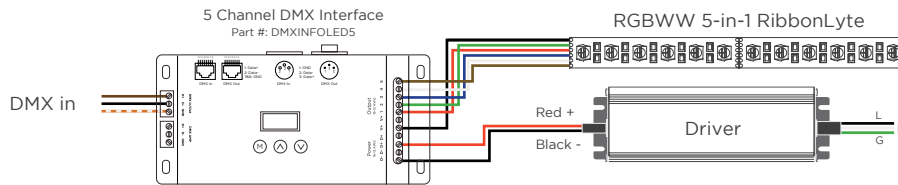


WARM DIM

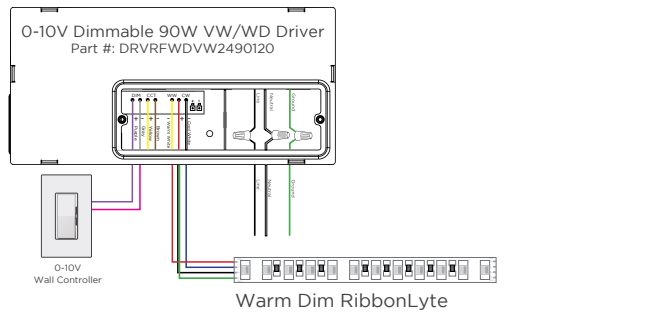

2-CHANNEL VARIABLE WHITE DIMMING

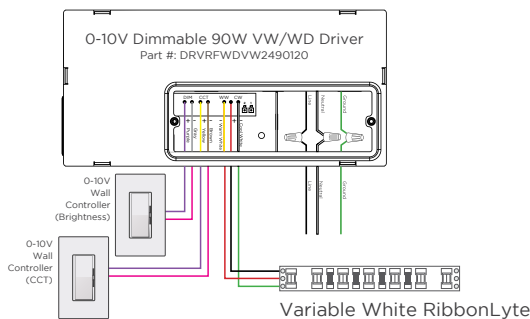

DMX WIRING DIAGRAM - COMPATIBLE WITH ALL MODELS OF VARIABLE WHITE RIBBONLYTE

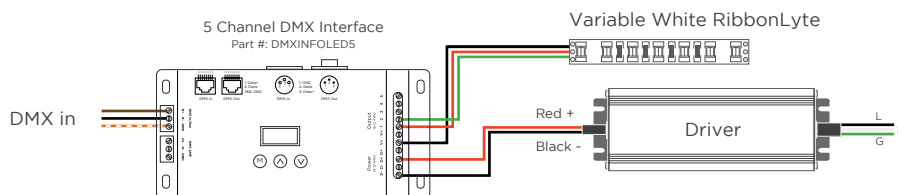

WIRE COLORS PER RIBBONLYTE COLOR

STATIC WHITE + STATIC COLOR

Red Wire (+) Positive
Black Wire (-) Negative

RGBW + RGBA

Black Wire (+) Positive
Green Wire (-) goes to Green Channel
Red Wire (-) goes to Red Channel
Blue Wire (-) goes to Blue Channel
White Wire (-) goes to White Channel

RGBWW

Black (+) Positive
Green Wire (-) goes to Green Channel
Red Wire (-) goes to Red Channel
Blue Wire (-) goes to Blue Channel
White Wire (-) goes to White Channel 1
Brown Wire (-) goes to White Channel 2

WARM DIM

Red Wire (-) goes to Warm White Channel
Blue Wire (-) goes to Cool White Channel
Black Wire (+) goes to Warm White Channel
Green Wire (+) goes to Cool White Channel

VARIABLE WHITE

Black Wire (+) Positive
Red Wire (-) goes to Warm White Channel
Green Wire (-) goes to Cool White Channel