


AW40 CHANNEL FIXTURE

The AW40 fixture is an aluminum extrusion that utilizes two rows of RibbonLyte at once to create soft, 2-way directional decorative lighting. This unique T-shaped channel provides incredible options for backlighting or use as a sconce. Mount AW40 on walls or in furniture or use it as a backlighting frame. Create a unique custom fixture with AW40 channel and our select RibbonLyte products.

- Available for field assembly or factory assembly
- 0.53 in. (13.5 mm) wide by 1.58 in. (40 mm) deep
- Wattage Range from 0.75 W/ft (2.46 W/m) to 6.0 W/ft (19.7 W/m)
- Static White delivered lumen range from 44 lm/ft (145 lm/m) up to 737 lm/ft (2417 lm/m)
- Available in aluminum, white, black or custom colors
- Clear Slide Lens, Frosted Slide Lens or Milky Slide Lens


HOUSING FINISHES

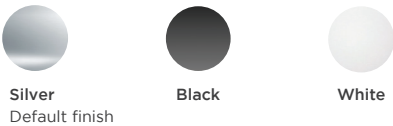

LENS FINISHES



AVAILABLE COLORS & COLOR TEMPERATURES



DIMENSIONS

AW40 Channel	Mounting Clip (included accessory)
0.07 in. (1.7 mm) 0.1 in. (2.6 mm) 0.33 in. (8.5 mm) 0.44 in. (11.2 mm) 0.53 in. (13.5 mm) 0.41 in. (10.3 mm) 1.58 in. (40 mm) Width: 0.53 in. (13.5 mm) Height: 1.58 in. (40 mm) Internal Width (up & down): 0.33 in. (8.5 mm) Internal Width (side): 0.41 in. (10.3 mm) Internal Height: 0.1 in. (2.6 mm)	Side View 0.57 in. (14.5 mm) 0.14 in. (3.5 mm) Top View 0.57 in. (14.5 mm) 0.95 in. (24 mm) Assembled View Width: 0.57 in. (14.5 mm) Length: 0.95 in. (24 mm)

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

SPECIFICATIONS

Lens Type	Clear Slide Lens, Frosted Slide Lens, Milky Slide Lens
Length	Channel is sold by the foot and cut to your exact desired length. Required amount of mounting clips included.
Operating Voltage	24V
Dimming	MLV / 0-10 Volt / Lutron Hi-Lume 1% dimming LED drivers / Lutron VIVE code compliance available / ELV / DALI / DMX
Operating Temperature	-40° F to 158° F (-40° C to 70° C)
Colors	1800K, 2000K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 6000K, Red, Amber, Green, Blue, RGB, VW, Warm Dim (1800K, 2000K, 2200K only available in IP20)
CRI	90+ CRI (Static white only)
Lamp Life	L70 at 50,000 Hours
MacAdam Ellipses (SDCM)	2-Step Binning (For Static White LEDs only)
Certifications	ETL Listed: UL 2108 Issued: 2004/02/27 Ed: 1 Rev: 2014/02/24 Low Voltage Lighting Systems CSA C22.2#9.0 Issued: 1996/06/01 Ed: 1 (R2011) General Requirements for Luminaires; with Gen. Inst. 1: 1997, Gen Inst. 2: 1998. ROHS compliant UL 2108 - Low Voltage Lighting Systems UL 8750 - Light Emitting Diode (LED) Equipment for Use in Lighting Products UL 1598 / CSA 250.0-08 - Luminaires

ACCESSORIES

180° Connector (Part #: CHCOUP180XSV)	End Cap without Hole	End Cap with Hole

ORDERING GUIDE

STEP 1 Complete Channel Part Number

CHANNEL	LENS	HOUSING COLOR
CHAW40		
CHAW40 - AW40 Channel	C - Clear Slide Lens F - Frosted Slide Lens M - Milky Slide Lens	SV - Silver WH - White BK - Black Consult factory for custom colors

STEP 2 Complete RibbonLyte Part Number

CATEGORY	CRI	RIBBON TYPE & IP RATING
RB		
RB - RibbonLyte	0 - Static Color, Color Changing 90 - 90+ CRI Static White	SWS220 - Static White Series 2 IP20 SWS265 - Static White Series 2 IP65 SCS220 - Static Color Series 2 IP20 SCS265 - Static Color Series 2 IP65 RGB20 - RGB IP20 RGB65 - RGB IP65 VWS220 - VW Series 2 IP20 VWS265 - VW Series 2 IP65 WD20 - Warm Dim IP20 WD65 - Warm Dim IP65

WATTAGE

0.75 - 0.75 W/ft (2.46 W/m - Static White, Static Color)
1.0 - 1.0 W/ft (3.3 W/m - Variable White)
1.5 - 1.5 W/ft (4.9 W/m - Static White, Static Color)
2.2 - 2.2 W/ft (7.2 W/m - Static White, Static Color, RGB)
3.0 - 3.0 W/ft (9.8 W/m - Static White, Static Color, Variable White)
4.4 - 4.4 W/ft (14.4 W/m - Static White, Static Color, RGB)
5.0 - 5.0 W/ft (16.4 W/m - Static White, Static Color)
5.2 - 5.2 W/ft (17.1 W/m - Warm Dim)
6.0 - 6.0 W/ft (19.7 W/m - Static White, Static Color, Variable White)

COLOR


18 - 1800K R - Red
20 - 2000K A - Amber
22 - 2200K G - Green
24 - 2400K B - Blue
27 - 2700K RGB - Red, Green, Blue
30 - 3000K VW - Variable White
35 - 3500K 2920 - Warm Dim 2900K-2000K (IP20)
40 - 4000K 2721 - Warm Dim 2900K-2000K (IP65)
60 - 6000K Z - Undecided**

** For quotes only. Must be chosen before final order.

CONNECTION OPTIONS (See diagrams on the right)

- 1 - End Feed Bare Wire Connection
2 - Back Feed Bare Wire Connection
3 - Side Feed Bare Wire Connection
4 - End Feed with IP67 Male Coupler
5 - Soldered Daisy Chain
6 - Daisy Chain With IP67 Couplers

Custom Length (ft.)

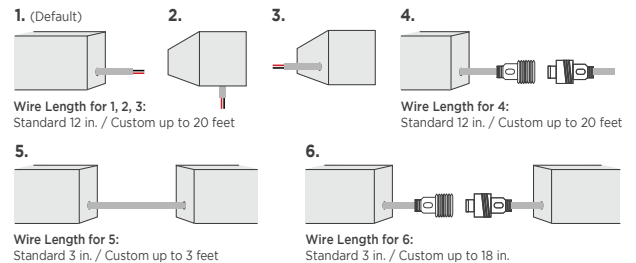

STEP 3 Complete Assembly Option & Length

ASSEMBLY OPTION	LENGTH (Standard factory assembled length up to 78 in. / 2 m)
FI - Field Assembly	Consult factory for custom factory assembled length (up to 13 ft / 4 m)
FA - Factory Assembly	

STEP 4 Add Accessories

ACCESSORIES

CHCOUP180XSV - 180° Coupler

SPECIFICATIONS

Available Wattages	Cutttable Length	LED Pitch	Color Temp.	lm/W without Lens	Delivered Lumens with Clear Slide Lens (lm/ft / lm/m)	Delivered Lumens with Frosted Slide Lens (lm/ft / lm/m)	Delivered Lumens with Milky Slide Lens (lm/ft / lm/m)	Standard Cable Length	Compatible with Channel		
									IP20	IP65	IP68
0.75 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	1800K	84	59 / 192	57 / 186	44 / 145	12 in. (30.5 cm)	✓	✓	
			2000K	99	69 / 227	69 / 227	52 / 171				
			2200K	109	76 / 249	76 / 249	57 / 188				
			2400K	113	79 / 259	79 / 259	59 / 195				
			2700K	123	86 / 281	86 / 281	65 / 212				
			3000K	123	86 / 281	86 / 281	65 / 212				
			3500K	130	91 / 297	91 / 297	68 / 224				
			4000K	134	93 / 307	93 / 307	70 / 231				
			6000K	131	91 / 300	91 / 300	69 / 226				
1.5 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	1800K	84	117 / 384	117 / 384	88 / 289	12 in. (30.5 cm)	✓	✓	
			2000K	98	137 / 384	137 / 449	103 / 338				
			2200K	109	152 / 499	152 / 499	114 / 375				
			2400K	113	158 / 517	158 / 517	119 / 389				
			2700K	123	172 / 563	172 / 563	129 / 424				
			3000K	123	172 / 563	172 / 563	129 / 424				
			3500K	129	180 / 590	180 / 590	135 / 444				
			4000K	134	187 / 613	187 / 613	141 / 462				
			6000K	131	183 / 600	183 / 600	138 / 451				
2.2 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	1800K	83	170 / 557	170 / 557	128 / 419	12 in. (30.5 cm)	✓	✓	
			2000K	96	196 / 644	196 / 644	148 / 485				
			2200K	106	217 / 712	217 / 712	163 / 536				
			2400K	111	227 / 745	227 / 745	171 / 561				
			2700K	120	246 / 806	246 / 806	185 / 606				
			3000K	122	250 / 819	250 / 819	188 / 616				
			3500K	127	260 / 852	260 / 852	196 / 642				
			4000K	133	272 / 893	272 / 893	205 / 672				
			6000K	128	262 / 859	262 / 859	197 / 647				
3.0 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	1800K	84	234 / 769	234 / 769	176 / 579	12 in.. (30.5 cm)	✓	✓	
			2000K	98	273 / 897	273 / 897	206 / 675				
			2200K	108	301 / 989	301 / 989	227 / 744				
			2400K	109.8	306 / 1005	306 / 1005	231 / 756				
			2700K	122.9	343 / 1125	343 / 1125	258 / 847				
			3000K	130	363 / 1190	363 / 1190	273 / 896				
			3500K	133	371 / 1217	371 / 1217	279 / 916				
			4000K	133	371 / 1217	371 / 1217	279 / 916				
			6000K	128	357 / 1172	357 / 1172	269 / 882				
4.4 Static White Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	1800K	81	331 / 1087	331 / 1087	249 / 818	12 in. (30.5 cm)	✓	✓	
			2000K	95	389 / 1275	389 / 1275	293 / 960				
			2200K	105	430 / 1410	430 / 1410	323 / 1061				
			2400K	109	446 / 1463	446 / 1463	336 / 1101				
			2700K	122	499 / 1638	499 / 1638	376 / 1233				
			3000K	129	528 / 1732	528 / 1732	397 / 1304				
			3500K	132	540 / 1772	540 / 1772	407 / 1334				
			4000K	132	540 / 1772	540 / 1772	407 / 1334				
			6000K	126	516 / 1692	516 / 1692	388 / 1273				
5.0 Static White Series 2	1.4 in. (35.7 mm)	68 LEDs/ft (224 LEDs/m)	1800K	83	386 / 1266	386 / 1266	291 / 953	12 in. (30.5 cm)	✓	✓	
			2000K	98	456 / 1495	456 / 1495	343 / 1125				
			2200K	107	498 / 1632	498 / 1632	375 / 1229				
			2400K	110	511 / 1675	511 / 1675	384 / 1261				
			2700K	123	571 / 1875	571 / 1875	430 / 1411				
			3000K	130	605 / 1983	605 / 1983	455 / 1493				
			3500K	133	618 / 2029	618 / 2029	466 / 1527				
			4000K	133	618 / 2029	618 / 2029	466 / 1527				
			6000K	127	591 / 1937	591 / 1937	445 / 1458				



SPECIFICATIONS

Available Wattages	Cuttable Length	LED Pitch	Color Temp.	lm/W without Lens	Delivered Lumens with Clear Slide Lens (lm/ft / lm/m)	Delivered Lumens with Frosted Slide Lens (lm/ft / lm/m)	Delivered Lumens with Milky Slide Lens (lm/ft / lm/m)	Standard Cable Length	Compatible with Channel		
									IP20	IP65	IP68
6.0 Static White Series 2	1.4 in. (35.7 mm)	68 LEDs/ft (224 LEDs/m)	1800K	82	458 / 1501	458 / 1501	344 / 1130	12 in. (30.5 cm)	✓	✓	
			2000K	95	530 / 1739	530 / 1739	399 / 1309				
			2200K	106	591 / 1941	591 / 1941	445 / 1461				
			2400K	109	608 / 1995	608 / 1995	458 / 1502				
			2700K	122	681 / 2233	681 / 2233	512 / 1681				
			3000K	129	720 / 2362	720 / 2362	542 / 1778				
			3500K	132	737 / 2417	737 / 2417	554 / 1819				
			4000K	132	737 / 2417	737 / 2417	554 / 1819				
			6000K	126	703 / 2307	703 / 2307	529 / 1736				
0.75 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	41	29 / 94	29 / 94	22 / 71	12 in. (30.5 cm)	✓	✓	
			Green	175	122 / 400	122 / 400	92 / 301				
			Blue	19	13 / 43	13.3 / 43	10 / 33				
			Amber	34	24 / 78	24 / 78	18 / 59				
1.5 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	42	59 / 192	59 / 192	44 / 145	12 in. (30.5 cm)	✓	✓	
			Green	160	223 / 732	223 / 732	168 / 551				
			Blue	18	25 / 82	25 / 82	19 / 62				
			Amber	34	47 / 156	47 / 156	36 / 117				
2.2 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	42	86 / 282	86 / 282	65 / 212	12 in. (30.5 cm)	✓	✓	
			Green	145	297 / 973	297 / 973	223 / 733				
			Blue	18	37 / 121	37 / 121	28 / 91				
			Amber	34	70 / 228	70 / 228	52 / 172				
3.0 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	40	112 / 366	112 / 366	84 / 267	12 in. (30.5 cm)	✓	✓	
			Green	127	354 / 1162	354 / 1162	267 / 875				
			Blue	25	70 / 229	70 / 229	53 / 172				
			Amber	29	81 / 265	81 / 265	61 / 200				
4.4 Static Color Series 2	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	Red	38	155 / 510	155 / 510	117 / 384	12 in. (30.5 cm)	✓	✓	
			Green	117	479 / 1571	479 / 1571	360 / 1182				
			Blue	24	98 / 322	98 / 322	74 / 243				
			Amber	25	102 / 336	102 / 336	77 / 253				
5.0 Static Color Series 2	1.4 in. (35.7 mm)	68 LEDs/ft (224 LEDs/m)	Red	37	172 / 564	172 / 564	130 / 425	12 in. (30.5 cm)	✓	✓	
			Green	116	539 / 1770	539 / 1770	406 / 1332				
			Blue	24	112 / 366	112 / 366	84 / 276				
			Amber	26	121 / 397	121 / 397	91 / 299				
6.0 Static Color Series 2	1.4 in. (35.7 mm)	68 LEDs/ft (224 LEDs/m)	Red	37	206 / 677	206 / 677	155 / 510	12 in. (30.5 cm)	✓	✓	
			Green	113	631 / 2069	631 / 2069	475 / 1557				
			Blue	23	128 / 421	128 / 421	97 / 317				
			Amber	24	134 / 439	134 / 439	101 / 331				
1.0 Variable White Series 2	1.97 in. (50 mm)	42 LEDs/ft (140 LEDs/m)	2000K + 6500K	85	79 / 259	79.1 / 259	60 / 195	12 in. (30.5 cm)	✓	✓	
3.0 Variable White Series 2	1.97 in. (50 mm)	42 LEDs/ft (140 LEDs/m)	2000K + 6500K	80	223 / 732	223 / 732	168 / 551	12 in. (30.5 cm)	✓	✓	
6.0 Variable White Series 2	1.97 in. (50 mm)	42 LEDs/ft (140 LEDs/m)	2000K + 6500K	75	419 / 1373	419 / 1373	315 / 1033	12 in. (30.5 cm)	✓	✓	

SPECIFICATIONS

Available Wattages	Cutable Length	LED Pitch	Color Temp.	lm/W without Lens	Delivered Lumens with Clear Slide Lens (lm/ft / lm/m)	Delivered Lumens with Frosted Slide Lens (lm/ft / lm/m)	Delivered Lumens with Milky Slide Lens (lm/ft / lm/m)	Standard Cable Length	Compatible with Channel		
									IP20	IP65	IP68
2.2 RGB	6.55 in. (166.4 mm)	9 LEDs/ft (30 LEDs/m)	RGB	37	76 / 248	75.7 / 248	57 / 187	12 in. (30.5 cm)	✓	✓	
4.4 RGB	3.94 in. (100 mm)	18 LEDs/ft (60 LEDs/m)	RGB	37	76 / 249	75.7 / 248	57 / 187	12 in. (30.5 cm)	✓	✓	
5.2 Warm Dim	3.94 in. (100 mm)	36 LEDs/ft (120 LEDs/m)	WARM DIM	55	266 / 873	257.4 / 844	200 / 657	12 in. (30.5 cm)	✓	✓	

DIODE VISIBILITY CHART (Data below applies to installations with Milky lens only)

 No Visible Diode = N					 With Visible Diode = Y			
Static White & Static Color RibbonLyte					Color Changing RibbonLyte			
0.75/1.5/2.2	3.0/4.4 Static White	3.0/4.4 Static Color	5.0/6.0 Static White	5.0/6.0 Static Color	2.2 RGB	4.4 RGB	Warm Dim	Variable White
IP20 IP65	IP20 IP65	IP20 IP65	IP20 IP65	IP20 IP65	IP20 IP65	IP20 IP65	IP20 IP65	IP20 IP65
N	N	N	N	N	N	N	N	N

AVAILABLE DRIVERS

NON-DIMMING ELECTRONIC DRIVERS



30W, 60W, 96W Non-Dimming Electronic Class 2 Drivers

Part No.:

- DRVW2430 (30 Watt)
- DRVW2460 (60 Watt)
- DRVW2496 (96 Watt)

Output Voltage: 24 V
Voltage Range: 120-277 VAC
IP Rating: Dry or Damp
UL Listed



240W, 320W Non-Dimming Electronic Drivers

Part No.:

- DRVW24240 (240 Watt)
- DRVW24320 (320 Watt)

Output Voltage: 24 V
Voltage Range: 90-305 VAC
IP Rating: Dry or Damp
UL Recognized



40W Lutron Hi-Lume 1% Dimming Class 2 Drivers

Part No.:

- DRVLUT24403W (40 Watt, 3-wire)
- DRVLUT24402W (40 Watt, 2-wire)

Output Voltage: 24 V
Voltage Range: 120-277 VAC (3-wire model)
or 120V (2-wire model)
IP Rating: Dry or Damp
Dimmable using 2-wire forward phase,
3-wire+G or digital EcoSystem
UL Listed



96W Lutron Hi-Lume Premier 0.1% Dimming Class 2 Driver

Part No.:

- DRVLUT24963W (96 Watt, 3-wire)

Output Voltage: 24 V
Voltage Range: 120-277 VAC
IP Rating: Dry or Damp
Dimmable using 3-wire+G or digital EcoSystem
0.1% dimming SoftOn/FadeToBlack
with EcoSystem
UL Listed

MAGNETIC, ELV & MLV DRIVERS WITH COMPATIBLE DIMMERS



120 VAC

60W, 96W, 200W, 300W Class 1 & 2 Magnetic Drivers

Part No.:

- DRVWDIM2460 (60 Watt)
- DRVWDIM24100 (96 Watt)
- DRVWDIM24200 (200 Watt)
- DRVWDIM24300 (300 Watt)

Magnetic Driver
Output Voltage: 24 V
Voltage Range: 120 VAC
IP Rating: Dry or Damp
Forward Phase Dimming
ETL Listed



277 VAC

60W, 96W, 200W, 300W Class 1 & 2 Magnetic Drivers

Part No.:

- DRVWDIM2460277 (60 Watt)
- DRVWDIM24100277 (96 Watt)
- DRVWDIM24200277 (200 Watt)
- DRVWDIM24300277 (300 Watt)

Magnetic Driver
Output Voltage: 24 V
Voltage Range: 277 VAC
IP Rating: Dry or Damp
Forward Phase Dimming
ETL Listed



60W, 96W, 150W, 200W ELV & MLV Drivers

Part No.:

- DRVW2460ELV (60 Watt)
- DRVW2496ELV (96 Watt)
- DRVW24150ELV (150 Watt)
- DRVW24200ELV (200 Watt)

Line Voltage Dimmable Drivers
Output Voltage: 24 V
Voltage Range: 100-130 VAC
IP Rating: Dry or Damp
Dimmable
ETL, UL and CSA Listed



LUTRON Skylark Contour Dimmer

Part No.: TRIDIMSKY
Width: 2.94 in (75 mm)
Length: 4.69 in (120 mm)
Depth: 0.30 in (7.6 mm)

- Single pole and 3-way versions
- Compatible with Acolyte MLV drivers
- Slide adjusts brightness and On/Off control
- 30 mA max control current
- Available in white finish



LUTRON NOVA-T Dimmer

Part No.: TRIDIMNOVA
Width: 2.75 in (70 mm)
Length: 4.56 in (116 mm)
Depth: 0.30 in (7.6 mm)

- Slide adjusts brightness and On/Off control
- 30 mA max control current
- Available in white finish



LUTRON DIVA Dimmer

Part No.: TRIDIMDIVA
(With Locator Light) TRIDIMDIVAL
Width: 2.94 in (75 mm)
Length: 4.69 in (120 mm)
Depth: 0.30 in (7.6 mm)

- Large paddle switch with a captive linear-slide dimmer
- 30 mA max control current
- Available in white finish
- Available with locator light which glows green when the switch is off

Note: For more options, please reference the Optional Dimmer List on Acolyte product website page.



AVAILABLE DRIVERS / CONTROLLERS AND DIMMING OPTIONS / WIRE GAUGE CHART

0-10V DRIVERS AND DIMMERS

DIMMING MODULE



0-10V Dimmable Waterproof Drivers

96W Part No.: DRVW249610P
288W Part No.: DRVW2428810P
Output Voltage: 24 V (+/- 0.5V)
Voltage Range: 100-277 VAC
Environmental Rating: UL Wet Location
UL Listed



LUTRON DIVA Dimmer

Part No.: LVDIMDIVA
Width: 2.94 in (75 mm)
Length: 4.69 in (120 mm)
Depth: 0.30 in (7.6 mm)
• Compatible with 0-10 V Dimming Module
• Large paddle switch with a captive linear-slide dimmer
• 30 mA max control current
• Available in white finish



LUTRON NOVA-T Dimmer

Part No.: LVDIMNOVA
Width: 2.75 in (70 mm)
Length: 4.56 in (116 mm)
Depth: 0.30 in (7.6 mm)
• Compatible with 0-10 V Dimming Module
• Slide adjusts brightness and On/Off control
• 30 mA max control current
• Available in white finish



Variable White Dimming Module

Part No.: VWDIMMOD
• 1 dimming module required per 30 ft (9.1 m)
• This product is only compatible with Variable White RibbonLyte, not Variable White Amber or Variable White Red. Works with any 0-10V dimmers to provide CCT change with one dimmer and brightness change with the other.

Note: Max length before additional power is introduced

DMX CONTROLLER AND PART NUMBER - FOR COLOR CHANGING VERSIONS



GLASS TOUCH

WALL CONTROLLER
Part Number: AWCRGBWW
AWCVWW



1 ZONE WALL CONTROLLER
Part Number: DMXCTRLG



5 ZONE WALL CONTROLLER
Part Number: DMXCTRL



10 ZONE WALL CONTROLLER
Part Number: DMXCTRLD



4 CHANNEL WATERPROOF DMX INTERFACE
Part Number: DMXINFWLCD4



5 CHANNEL DMX INTERFACE
Part Number: DMXINFLCD5




DMX OPTO SPLITTER
Part Number: DMXOS8

DRIVER AND RIBBONLYTE AT FULL LOAD


Wattages	30		60		96		150		200		240		300		320	
Wire Gauge	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
24 AWG	14	4.27	9	2.74	5.5	1.68	3.75	1.14	2.75	0.84	2.25	0.69	1.75	0.53	1.75	0.53
22 AWG	22	6.71	14	4.27	9	2.74	5.75	1.75	4.5	1.37	3.5	1.07	2.75	0.84	2.75	0.84
20 AWG	35	10.67	23	7.01	14	4.27	9	2.74	7	2.13	5.75	1.75	4.5	1.37	4.25	1.30
18 AWG	56	17.07	37	11.28	23	7.01	15	4.57	11	3.35	9	2.74	7.5	2.29	7	2.13
16 AWG	90	27.44	60	18.29	37	11.28	24	7.32	18	5.49	15	4.57	12	3.66	11	3.35
14 AWG	142	43.29	95	28.96	59	17.99	38	11.59	28	8.54	23	7.01	19	5.79	17	5.18
12 AWG	226	68.90	151	46.04	94	28.66	60	18.29	45	13.72	37	11.28	30	9.15	28	8.54
10 AWG	360	109.76	240	73.17	150	45.73	96	29.27	72	21.95	60	18.29	48	14.63	45	13.72
8 AWG	574	175.00	381	116.16	239	72.87	153	46.65	115	35.06	95	28.96	76	23.17	71	21.65

WIRING DIAGRAMS


0-10V

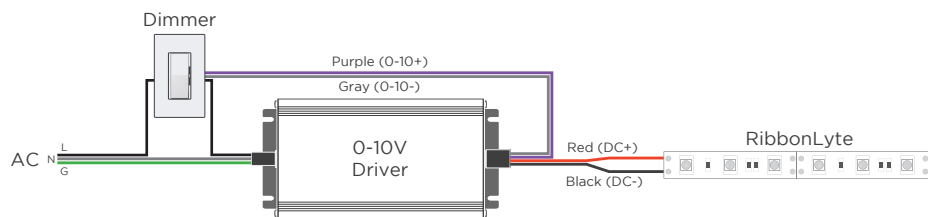


MLV / ELV

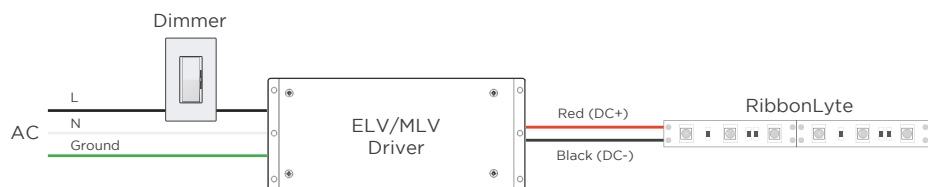


DMX

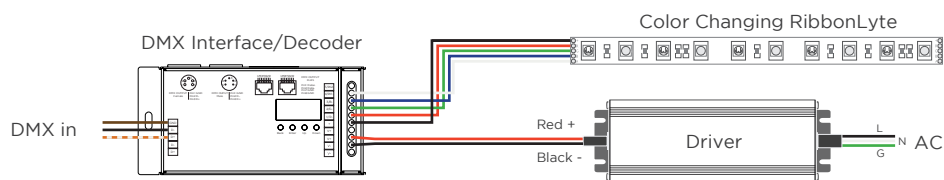


WARM DIM

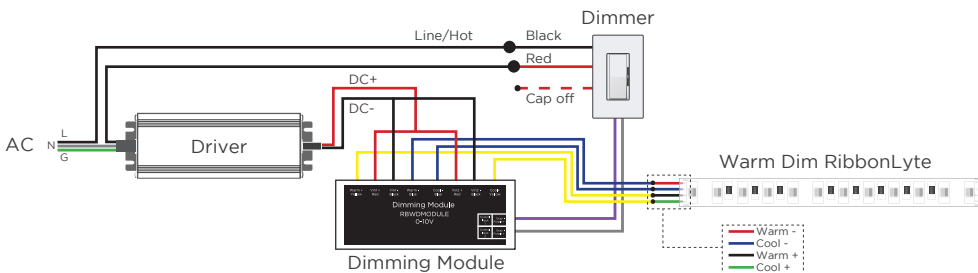

2-CHANNEL VARIABLE WHITE DIMMING

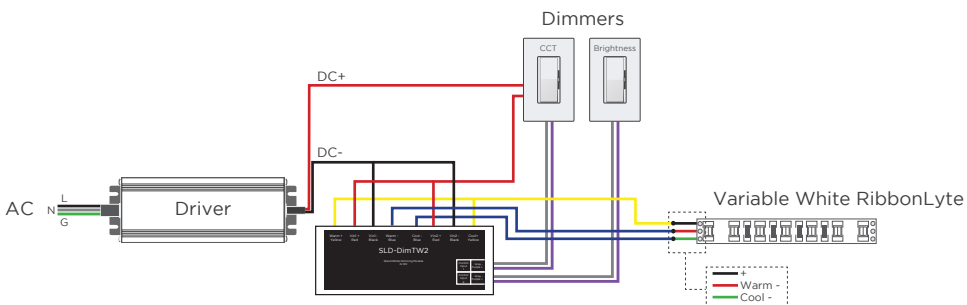

DMX WIRING DIAGRAM - COMPATIBLE WITH ALL MODELS OF VARIABLE WHITE RIBBONLYTE

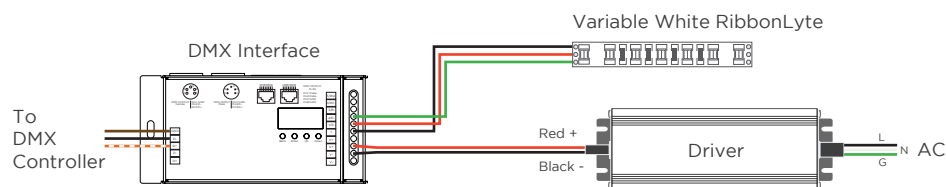

WIRE COLORS PER RIBBONLYTE COLOR

STATIC WHITE + STATIC COLOR

Red Wire (+) Positive
Black Wire (-) Negative

RGB

Black Wire (+) Positive
Red Wire (-) goes to Red Channel
Green Wire (-) goes to Green Channel
Blue Wire (-) goes to Blue Channel

RGBW/A

Black Wire (+) Positive
Red Wire (-) goes to Red Channel
Green Wire (-) goes to Green Channel
Blue Wire (-) goes to Blue Channel
White Wire (-) goes to White Channel

WARM DIM

Red Wire (-) goes to Warm White Channel
Blue Wire (-) goes to Cool White Channel
Black Wire (+) goes to Warm White Channel
Green Wire (+) goes to Cool White Channel

VARIABLE WHITE

Black Wire (+) Positive
Red Wire (-) goes to Warm White Channel
Green Wire (-) goes to Cool White Channel