

Date _____ Project _____


Notes _____

CUSTOMIZABLE BACKLYTE

Perfect for back lighting advertisements or translucent panels like onyx, stone and resin panels, our Customizable BackLytes can be cut into virtually any shape. They're lightweight with even light spread and fully customizable. Starting with a sheet of PMMA acrylic, we cut your custom shape on a CNC-controlled machine, then embed our LEDs directly into the perimeter of the panel and laminate it with a prismatic reflector, providing even surface light no matter the size.



- Manufactured to custom geometric shapes and sizes
- Static White, Static Color and Variable White models are constant current
- RGB models are 24V constant voltage and can be used with any of our 24V electronic drivers (including Lutron Hi-lume models) plus DMX control
- Thin profile: 0.52 in. (13.2 mm)
- Lightweight
- Lead time varies depending on size

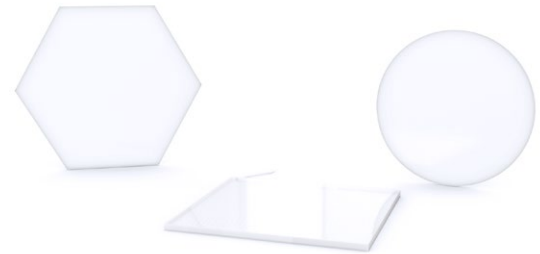

Applications:

Commercial Hospitality Residential
 Entertainment Museums Retail
 Healthcare Public Spaces




RoHS **IP20**

ORDERING GUIDE

Category	Color Temp.				Diffusion	Area in Sq Ft
RBBL						
RBBL - BackLyte	24 - 2400K	41 - 4100K	RGBA - RGBA	G - Green	C - Clear	Area of Backlyte in square feet
	27 - 2700K	60 - 6000K	VW - VW	B - Blue	M - Milky	
	30 - 3000K	RGB - RGB	R - Red	V - Violet		
	35 - 3500K	RGBW - RGBW	A - Amber			

AVAILABLE COLOR TEMPERATURES

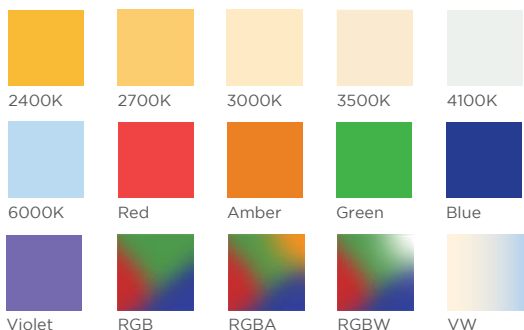

SPECIFICATIONS/ DIMENSIONS / ACCESSORIES/ USAGE GUIDELINES

SPECIFICATIONS	CUSTOMIZABLE BACKLYTE
Operating Voltage	Static White Models are constant current and input depends on size. Color changing models are 24V DC input.
Power Consumption	Static White: 4 W per linear foot along the perimeter / 13 W per linear meter along the perimeter Variable White: 6 W per linear foot along the perimeter / 19.7 W per linear meter along the perimeter (all LEDs on) RGBW and RGBA: 5.5 W per linear foot along the perimeter / 18 W per linear meter along the perimeter (all LEDs on)
Protection Rating	IP20
Lumen Output	Static White: 220 lm per linear foot along the perimeter / 720 lm per linear meter along the perimeter Variable White: 240 lm per linear foot along the perimeter / 790 lm per linear meter along the perimeter (all LEDs on) RGBW: 154 lm per linear foot along the perimeter / 505 lm per linear meter along the perimeter (all LEDs on) RGBA: 82 lm per linear foot along the perimeter / 270 lm per linear meter along the perimeter (all LEDs on)
Lumens per Watt	Static White: 55 lm/W Variable White: 40 lm/W (all LEDs on) RGBW: 28 lm/W (all LEDs on) RGBA: 15 lm/W (all LEDs on)
Dimming	Static White & Static Colors: 0-10 Volt Color Changing Models: DMX, Lutron A-Series LED drivers
Ambient Temperature	-40° C to 70° C (-40° F to 158° F)
Color Temperatures / Colors	2400K, 2700K, 3000K, 3500K, 4100K, 6000K, RGB, RGBW, RGBA, VW, Red, Amber, Green, Blue, Violet
Lamp Life	50,000 Hours
CRI (White LEDs)	90+
Connector Types	Bare end wire, 2-conductor IP20 connectors, 5-pin IP65 connectors
Weight	2 lbs. 6.6 oz per sq ft / 1.09 kg per sq ft

DIMENSIONS CUSTOMIZABLE BACKLYTE



Thickness	0.52 in. (13.2 mm)
Length	Minimum: 0.78 in. (2 cm), Maximum: 51.2 in. (130 cm)
Width	Minimum: 0.78 in. (2 cm), Maximum: 94.5 in. (240 cm)
Border Width	0.63 in. (16 mm)

ACCESSORIES

DRIVERS
See info on page 3



PARTS AND ACCESSORIES
See Parts and Accessories Guide



CONTROLLERS
See Controllers Guide




USAGE GUIDELINES

- Use with non-Acolyte supplied drivers and interfaces is not supported or warranted.
- We reserve the right to make changes to product lineup, specifications, design and finishes at any time without notice.
- This product is frameless and is designed to be installed behind translucent products or built into a frame. Because it is a custom product and each installation is different, we do not supply mounting hardware for this product. It can be used with mirror or z-clips, or built into a custom frame.

Acolyte does not warrant or represent that this information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.



AVAILABLE DRIVERS

	0-10V 1% DIMMABLE 95W DRIVER
	
Part Number	DRVCC95SS277010
Compatible Dimming	0-10 V
Output Voltage (DC)	20 - 54 V
Output Wattage	95 W
Output Current	0.1 - 2.75 A
Input Voltage Range (VAC)	120 - 277 VAC
Input Current (A)	0.89 A (120 VAC) / 0.38 (277 VAC)
Input Frequency	50 / 60Hz
Max Input Power (W)	110 W
Efficiency @ Max Load	88 (120 VAC) / 89 (277 VAC)
Max Input Current	0.89 A
THD @ Max Load	< 10% (120 VAC) / < 15% (277 VAC)
Power Factor @ Max Load	> 0.95
Surge Protection (Combi-Wave, KV)	6
Expected Life Time	50,000 Hours (< 65° C)
Operating Temperature	-40° F to 131° F (-40° C to 55° C)
Safety Standards	UL 8750, UL 1310, CSA, UL Class P
Weight	1.5 lbs (0.68 kgs)
Dimensions (L x W x H)	8.37 x 1.7 x 1.14 in. (212.6 x 43.2 x 29 mm)

Acolyte does not warrant or represent that this information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

REV.10MAY2022