



Date _____ Project _____

Notes _____

PC2 LINEARLYTE PENDANT FIXTURE

Create a beautifully lit space with one of our nine pendant fixture profiles. PC2 linear fixture is sold in 1 foot increments, with 5 different color temperature options.

- Sold in 1 foot (304.8 mm) or 1/2 meter increments
- UV Resistant lenses
- 0-10 V or DALI Dimmable
- Standard powdercoating in Silver, Black, and White (Custom colors available)
- Assembled in USA

Applications:


- | | | |
|---------------|---------------|-------------|
| Commercial | Hospitality | Residential |
| Entertainment | Museums | Retail |
| Healthcare | Public Spaces | |




ORDERING GUIDE

Category	Output	Fixture Length		Color Temp	Surface Finish	
PC2						
PC2	LO - Low	2 - 2 ft	6 - 6 ft	0.5m - 0.5 m	27 - 2700K	AL - Aluminum
	SO - Standard	3 - 3 ft	7 - 7 ft	1m - 1 m	30 - 3000K	W - White
	HO - High	4 - 4 ft	8 - 8 ft	1.5m - 1.5 m	35 - 3500K	K - Black
		5 - 5 ft		2m - 2 m	40 - 4000K	C - Custom
				2.4m - 2.4 m	50 - 5000K	*Custom RAL # available.

AVAILABLE COLOR TEMPERATURES




SPECIFICATIONS / LUMEN DATA / SUGGESTED SUSPENSION WIRE SEPARATED DISTANCES

SPECIFICATIONS																			
	<table border="1"> <tr> <td>Beam Angle</td> <td>106°</td> </tr> <tr> <td>Lens Type</td> <td>Milky</td> </tr> <tr> <td>Length</td> <td>Sold in 1 foot (304.8 mm) or 1/2 meter increments</td> </tr> <tr> <td>Operating Voltage</td> <td>27-54 V</td> </tr> <tr> <td>Dimming</td> <td>0-10V, DALI</td> </tr> <tr> <td>Colors</td> <td>2700K, 3000K, 3500K, 4000K, 5000K</td> </tr> <tr> <td>Certifications</td> <td>RoHS, ETL</td> </tr> <tr> <td>Weight</td> <td>0.48 lbs/ft (0.72 kg/m)</td> </tr> <tr> <td>Diameter</td> <td>2.4 in (61 mm)</td> </tr> </table>	Beam Angle	106°	Lens Type	Milky	Length	Sold in 1 foot (304.8 mm) or 1/2 meter increments	Operating Voltage	27-54 V	Dimming	0-10V, DALI	Colors	2700K, 3000K, 3500K, 4000K, 5000K	Certifications	RoHS, ETL	Weight	0.48 lbs/ft (0.72 kg/m)	Diameter	2.4 in (61 mm)
Beam Angle	106°																		
Lens Type	Milky																		
Length	Sold in 1 foot (304.8 mm) or 1/2 meter increments																		
Operating Voltage	27-54 V																		
Dimming	0-10V, DALI																		
Colors	2700K, 3000K, 3500K, 4000K, 5000K																		
Certifications	RoHS, ETL																		
Weight	0.48 lbs/ft (0.72 kg/m)																		
Diameter	2.4 in (61 mm)																		



LUMEN DATA / FIXTURE TESTED AT 3500K									
	W/ft	lm/ft	W/2 ft	lm/2 ft	W/4 ft	lm/4 ft	W/8 ft	lm/8 ft	lm/W
LO	3.5	377.0	7.0	754.0	14.0	1508.0	28.0	3016.0	107.0
SO	8.5	904.0	17.0	1808.0	34.0	3616.0	68.0	7323.0	106.0
HO	12.2	1214.0	24.4	2428.0	48.8	4856.0	97.6	9712.0	99.0

SUGGESTED SUSPENSION WIRE SEPARATED DISTANCES

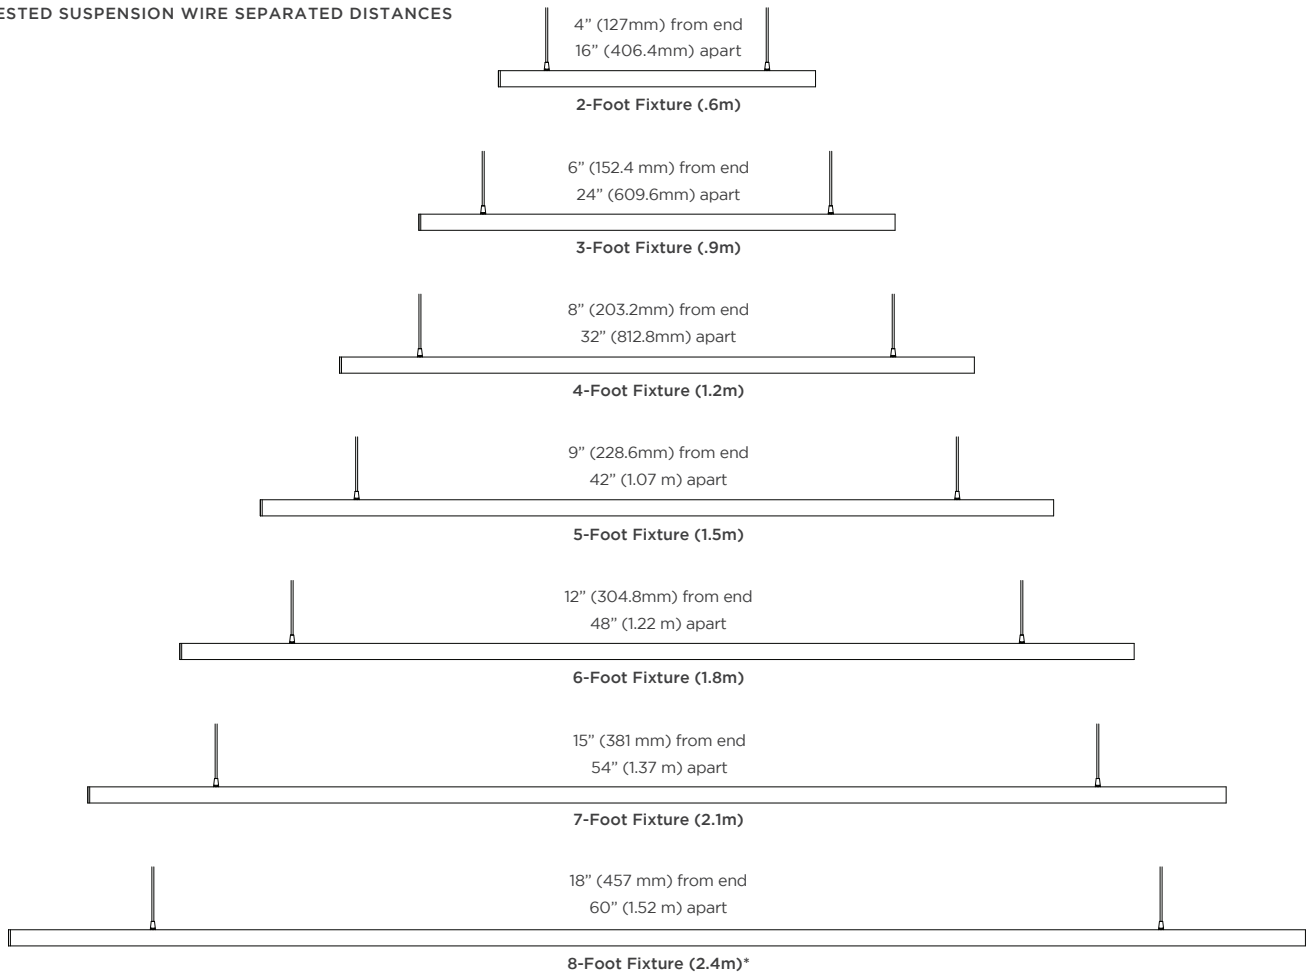

GENLED Acolyte[®] does not warrant or represent that the information is free from errors or omission. The information may change without notice and GENLED Acolyte[®] is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

FIXTURE INSTALLATION

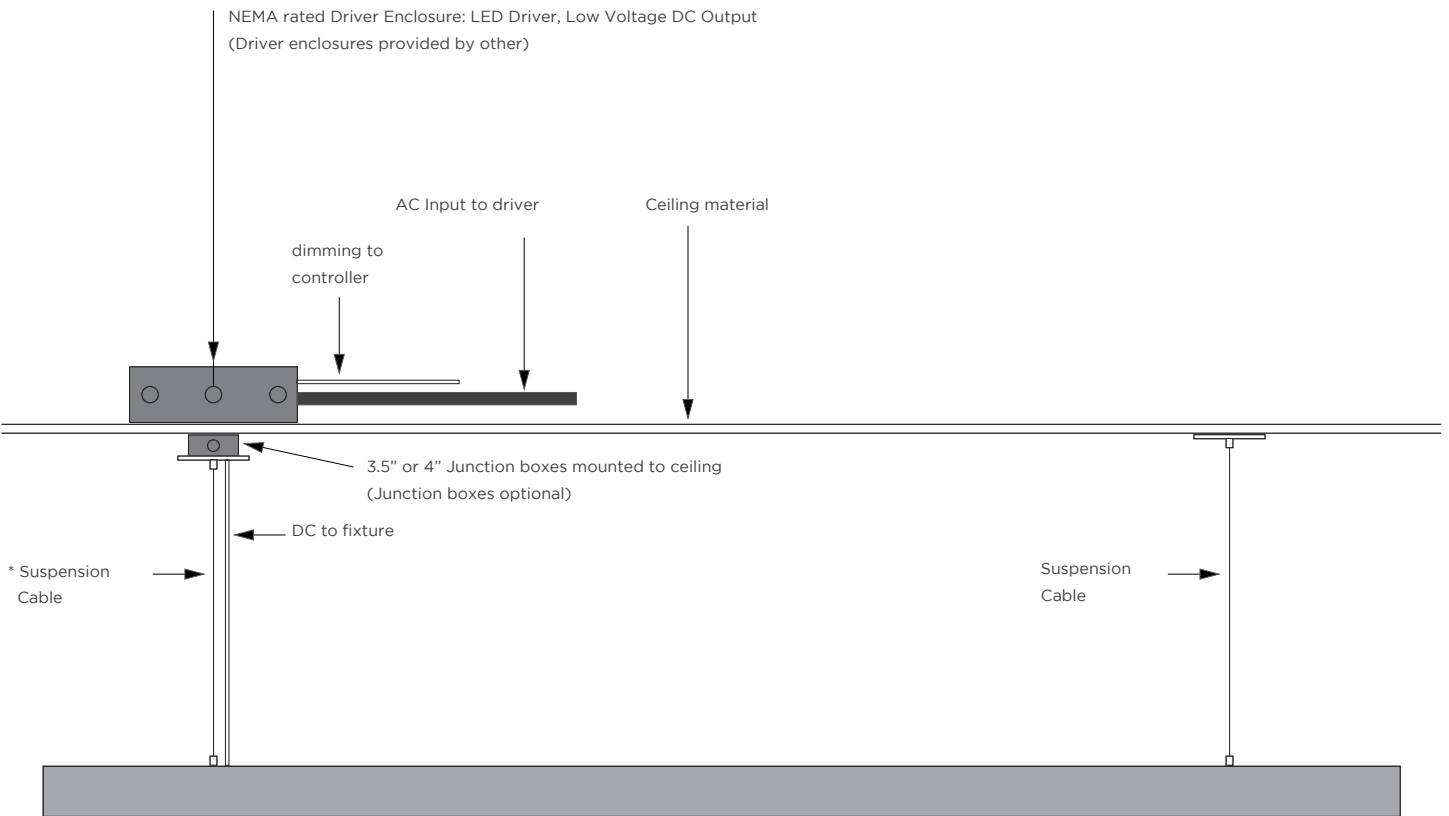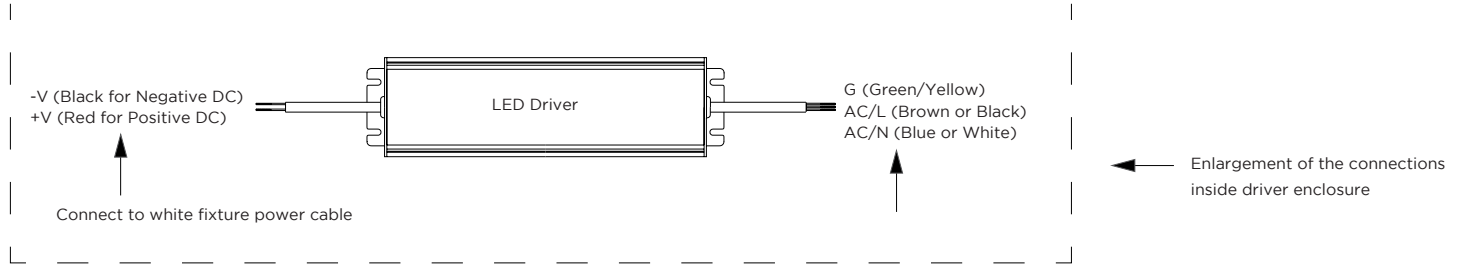

- * Length of Suspension Cable from ceiling to fixture: 150 inches (3.81 meter)
- * Field cuttable to any length