



Date \_\_\_\_\_ Project \_\_\_\_\_

Notes \_\_\_\_\_

**PR2 LINEARLYTE PENDANT FIXTURE**

Create a beautifully lit space with one of our nine pendant fixture profiles. PR2 linear fixture is sold in 1 foot increments, with 5 different color temperature options.

- Sold in 1 foot (304.8 mm) or 1/2 meter increments
- UV Resistant lenses
- 0-10 V or DALI Dimmable
- Standard powdercoating in Silver, Black, and White (Custom colors available)
- Assembled in USA

**Applications:**

- |               |               |             |
|---------------|---------------|-------------|
| Commercial    | Hospitality   | Residential |
| Entertainment | Museums       | Retail      |
| Healthcare    | Public Spaces |             |


 **RoHS** **IP20**



**ORDERING GUIDE**


Category	Output	Fixture Length			Color Temp	Surface Finish
PR2						
PR2	LO - Low	2 - 2 ft	6 - 6 ft	0.5m - 0.5 m	27 - 2700K	AL - Aluminum
	SO - Standard	3 - 3 ft	7 - 7 ft	1m - 1 m	30 - 3000K	W - White
	HO - High	4 - 4 ft		1.5m - 1.5 m	35 - 3500K	K - Black
		5 - 5 ft		2m - 2 m	40 - 4000K	C - Custom
					50 - 5000K	*Custom RAL # available.

**AVAILABLE COLOR TEMPERATURES**



SPECIFICATIONS / LUMEN DATA / SUGGESTED SUSPENSION WIRE SEPARATED DISTANCES

LUMEN DATA / FIXTURE TESTED AT 3500K




Beam Angle	92°
Lens Type	Milky
Length	Sold in 1 foot (304.8 mm) or 1/2 meter increments
Operating Voltage	27-54 V
Dimming	0-10V, DALI
Colors	2700K, 3000K, 3500K, 4000K, 5000K
Certifications	RoHS, ETL
Weight	0.875 lbs/ft (1.38 kg/m)
Width	1.34 in (34 mm)
Height	2.6 in (66 mm)
Max Length	7 ft (2.1 m) plus end cap thickness. Fixtures can be connected to make longer sections.

LUMEN DATA / FIXTURE TESTED AT 3500K



	W/ft	lm/ft	W/2 ft	lm/2 ft	W/4 ft	lm/4 ft	W/7 ft	lm/7 ft	lm/W
LO	3.5	230.0	7.0	461.0	14.0	922.0	24.5	1613.5	67.0
SO	7.0	458.0	14.0	917.0	28.0	1834.0	49.0	3209.5	66.0
HO	9.7	582.0	19.4	1164.0	38.8	2328.0	67.9	4074.0	60.0

SUGGESTED SUSPENSION WIRE SEPARATED DISTANCES

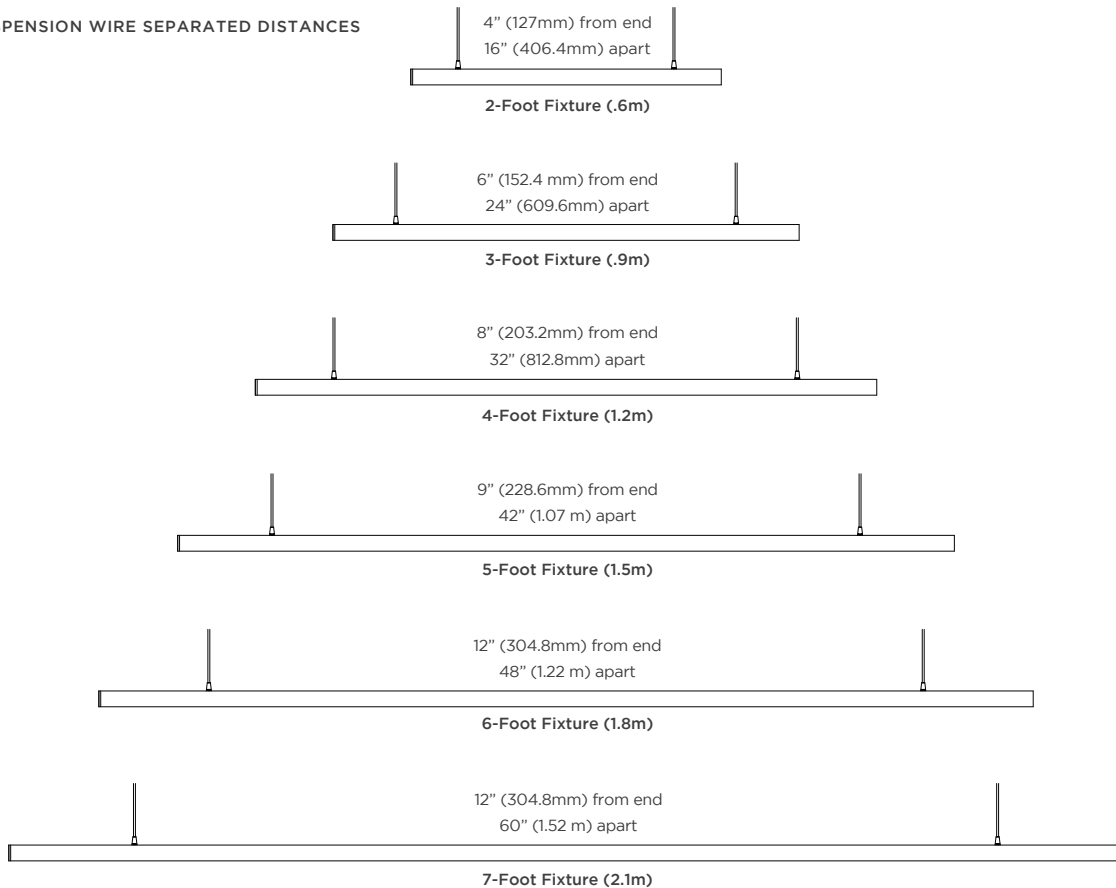

GENLED Acolyte<sup>®</sup> does not warrant or represent that the information is free from errors or omission. The information may change without notice and GENLED Acolyte<sup>®</sup> is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

FIXTURE INSTALLATION

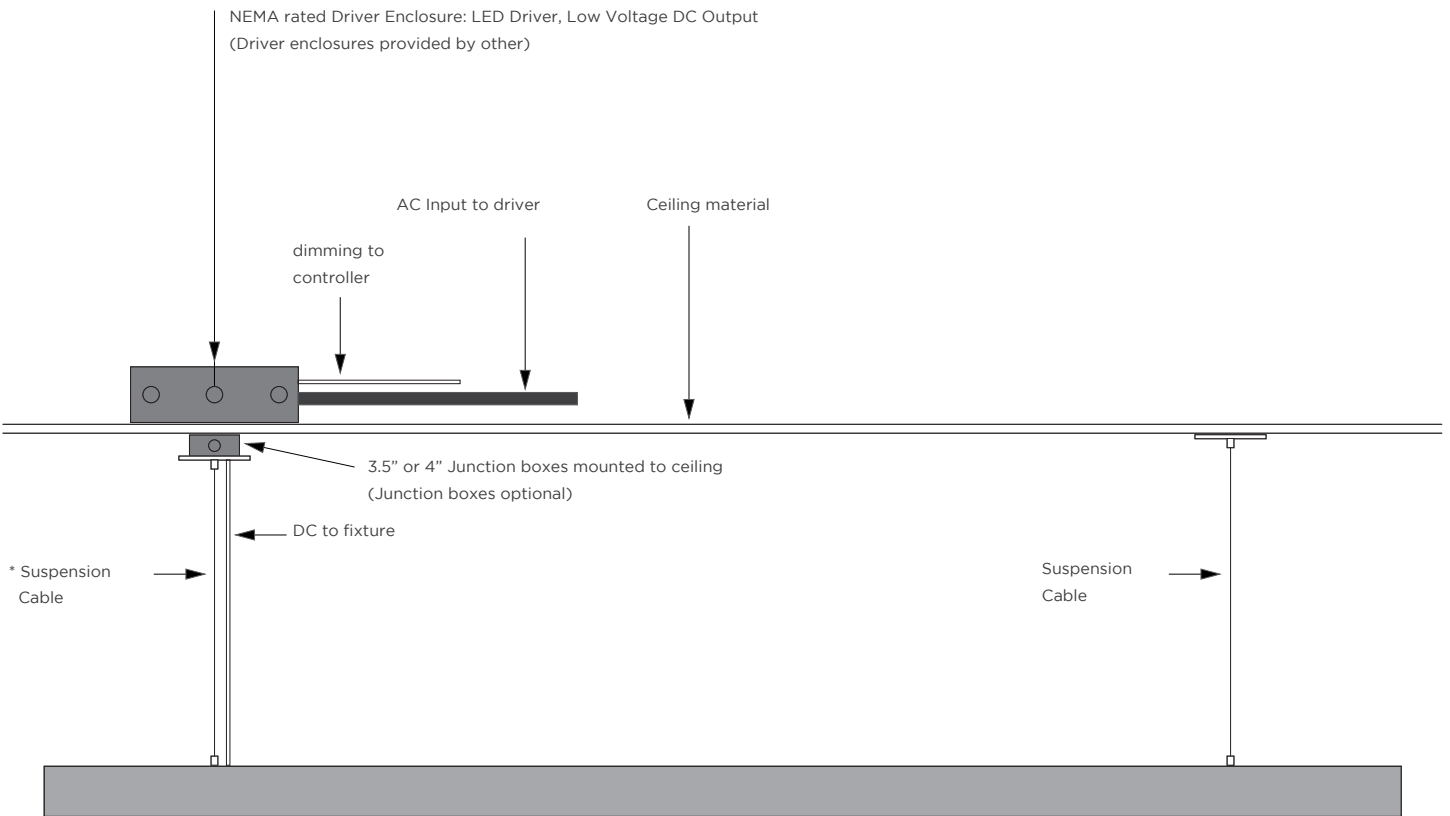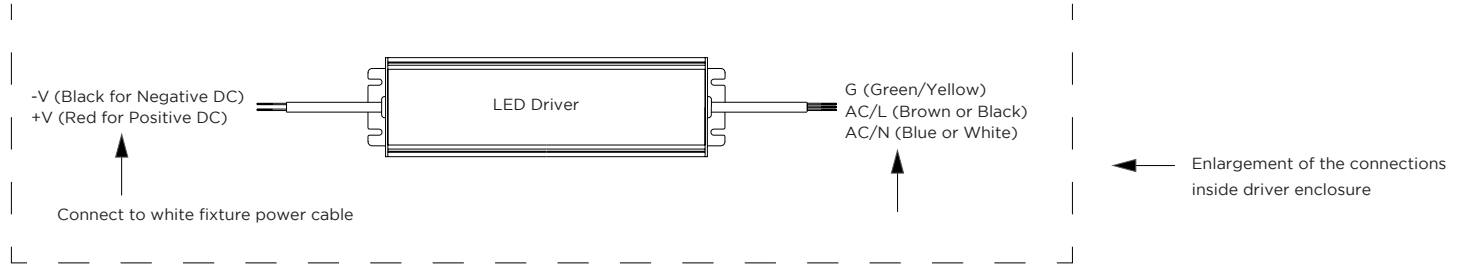

- \* Max Suspension Cable length from ceiling to fixture: 150 inches (3.81 meter)
- \* Field cuttable to any length
- \* Drivers can be mounted integral to fixture