



Date \_\_\_\_\_ Project \_\_\_\_\_

Notes \_\_\_\_\_

**PS2 LINEARLYTE PENDANT FIXTURE**

Create a beautifully lit space with one of our nine pendant fixture profiles. PS2 linear fixture is sold in 1 foot increments, with 5 different color temperature options.

- Sold in 1 foot (304.8 mm) or 1/2 meter increments
- UV Resistant lenses
- 0-10 V or DALI Dimmable
- Standard powdercoating in Silver, Black, and White (Custom colors available)
- Assembled in USA


**Applications:**

Commercial	Hospitality	Residential
Entertainment	Museums	Retail
Healthcare	Public Spaces	



**RoHS**


**IP20**



**ORDERING GUIDE**

Category	Output	Fixture Length			Color Temp	Surface Finish
PS2						
PS2	LO - Low	2 - 2 ft	6 - 6 ft	0.5m - 0.5 m	27 - 2700K	AL - Aluminum
	SO - Standard	3 - 3 ft	7 - 7 ft	1m - 1 m	30 - 3000K	W - White
	HO - High	4 - 4 ft		1.5m - 1.5 m	35 - 3500K	K - Black
		5 - 5 ft		2m - 2 m	40 - 4000K	C - Custom
					50 - 5000K	*Custom RAL # available.

**AVAILABLE COLOR TEMPERATURES**




SPECIFICATIONS / LUMEN DATA / SUGGESTED SUSPENSION WIRE SEPARATED DISTANCES

SPECIFICATIONS		
	Beam Angle	102°
	Lens Type	Milky
	Length	Sold in 1 foot (304.8 mm) or 1/2 meter increments
	Operating Voltage	27-54 V
	Dimming	0-10V, DALI
	Colors	2700K, 3000K, 3500K, 4000K, 5000K
	Certifications	RoHS, ETL
	Weight	0.96 lbs/ft (1.43 kg/m) without integral driver
	Width	2.44 in (62 mm)
	Height	3.23 in (82 mm)
Max Length	7 ft (2.1 m) plus end cap thickness. Fixtures can be connected to make longer sections.	



LUMEN DATA / FIXTURE TESTED AT 3500K										
		W/ft	lm/ft	W/2 ft	lm/2 ft	W/4 ft	lm/4 ft	W/7 ft	lm/7 ft	lm/W
PS2	LO	3.3	360.0	6.6	719.0	13.2	1438.0	23.1	2516.5	108.0
	SO	6.7	697.0	13.4	1394.0	26.8	2788.0	46.9	4879.0	104.0
	HO	9.7	950.0	19.4	1900.0	38.8	3800.0	67.9	6650.0	98.0

SUGGESTED SUSPENSION WIRE SEPARATED DISTANCES

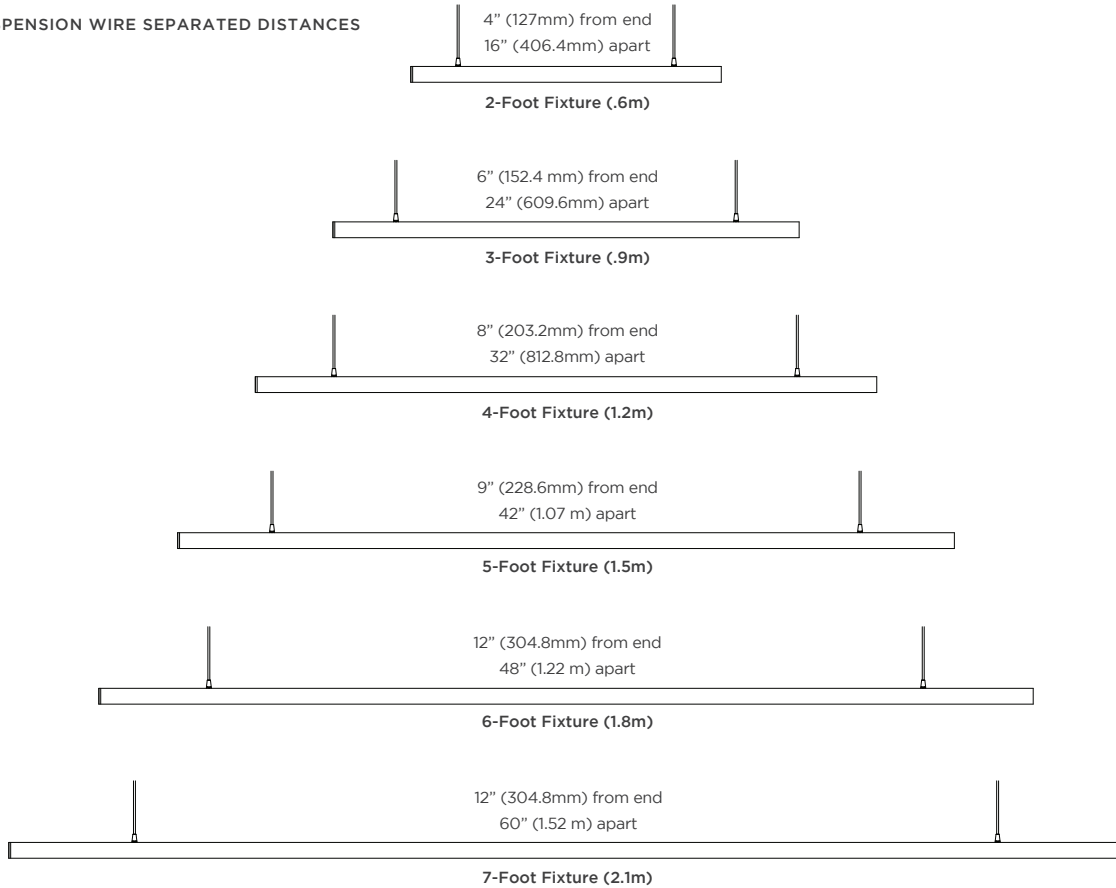

GENLED Acolyte<sup>®</sup> does not warrant or represent that the information is free from errors or omission. The information may change without notice and GENLED Acolyte<sup>®</sup> is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

FIXTURE INSTALLATION

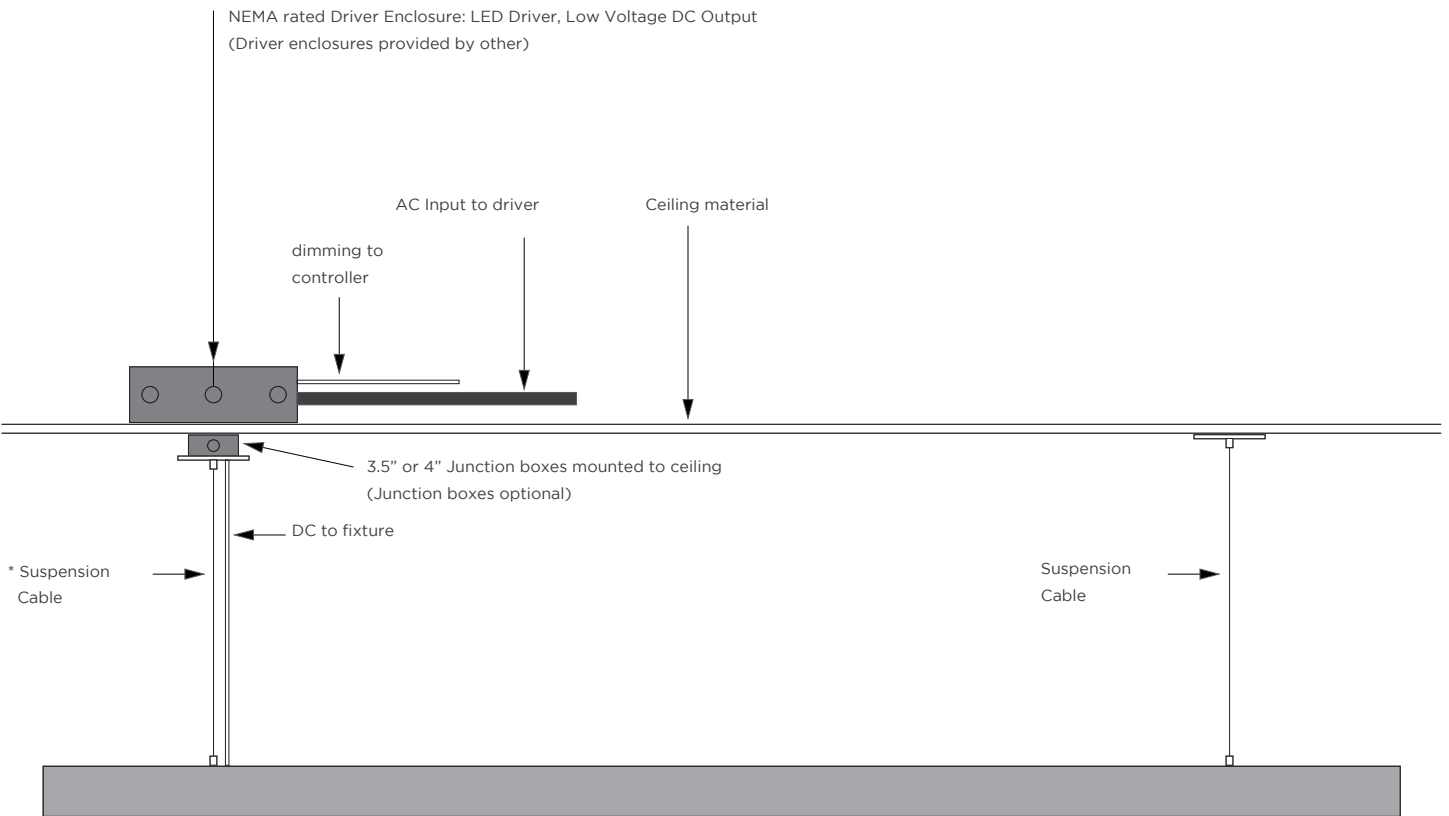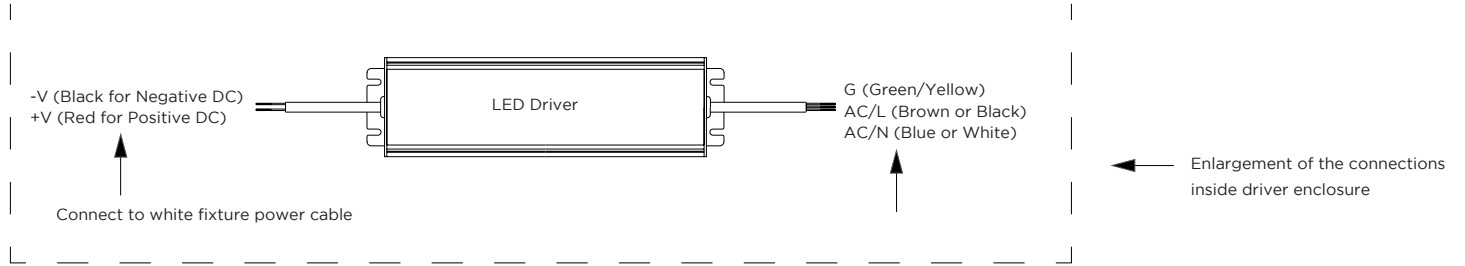

- \* Length of Suspension Cable from ceiling to fixture: 150 inches (3.81 meter)
- \* Field cuttable to any length
- \* Driver can also be mounted integral to fixture.