

4.4 RGB + WHITE & RGB + AMBER RIBBONLYTE

4.4 RGBW and RGBA RibbonLyte are DMX controlled using 3-in-1 RGB LEDs plus white or amber for a brighter or more pastel color. Use with Acolyte channel profiles to create an excellent fixture with no color refraction.

RGB + WHITE: Adds 3000K or 6000K to RGB to replicate tungsten and daylight.

RGB + AMBER: Adds 590 nanometer Amber for warm accents.

- Use with Acolyte channel profiles to create a custom fixture
- Flexible
- 24 Volt input
- Closet rated (standalone or surface channels)



Applications:

Commercial	Hospitality	Residential
Entertainment	Museums	Retail
Healthcare	Public Spaces	

RoHS IP20 IP65 IP68



5-Day QuickShip program applies to IP20 options only

ORDERING GUIDE

Category	CRI	Ribbon Type & IP Rating	Wattage + Color
RB	0		
RB - Ribbonlyte	0 - Color Changing	RGBWA20 - RGBW/A IP20 RGBWA65 - RGBW/A IP65 RGBWA68 - RGBW/A IP68	4.4RGB30 - 4.4 RGB+3000K 4.4RGB60 - 4.4 RGB+6000K 4.4RGBA - 4.4 RGB+AMBER

CONNECTION OPTIONS

1. End Feed Bare Wire Connection (Default Option)



2. IP67 Connector Input



3. Soldered Daisy Chain



4. Daisy Chain with IP67 Connectors



5. Bare Wire on Both Ends




Standard cable length if not specified:

1. 12 in. cable with bare wire (custom length up to 20 feet)
2. Standard 12 in. cable with IP67 connectors (custom length up to 10 feet)
3. Daisy chain with 3 in. cable between runs (custom length up to 36 in.)
4. 3 in. cable between IP67 connector and RibbonLyte (custom length up to 18 in.)
5. Standard 12 in. cable with bare wire (custom length up to 10 feet)

Note: IP67 connectors are used for both IP20 and IP65/IP68 RibbonLyte







AVAILABLE COLORS






Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

SPECIFICATIONS / DIAGRAM / USAGE GUIDELINES

4.4 RGB WHITE/ AMBER	
Operating Voltage	24 V
Power Consumption	4.4 W/ft (14.4 W/m)
Current (mA) - 24V	183 mA/ft (600.2 mA/m)
LED Pitch	18 LEDs/ft (60 LED/m)
Protection Rating	IP20, IP65, IP68
Dimming/Control	DMX / Lutron A-Series 1% dimming LED drivers
Operating Temperature	-40° F to 158° F (-40° C to 70° C)
Colors/Color Temperatures	RGBW (3000K), RGBW (6000K), RGB+Amber
Lumens - RGBW	236 lm/ft (774 lm/m) All LEDs at 100%
LED Beam Angle	120°
Lamp Life	50,000 Hours
Cutable Length - 24V	6.55 in (166.4 mm)
Lumens/Watt - RGBW	51 lm/W (All LEDs at 100%)
Lumens/Watt - RGBA	33 lm/W (All LEDs at 100%)
Constant Voltage	✓
Cable Length	12 in (30.5 cm)
Certifications	<p>UL 2108 Issued: 2016/06/17 Ed: 1 Rev: 2021/10/16 Low Voltage Lighting Systems. CSA C22.2 No. 250.0, General Requirements for Luminaires. ROHS compliant UL 2108. Suitable for use in closets, compliant with NFPA® 70, NEC® Section 410.16 (A)(3) and 410.16 (C)(5).</p>

24V DIMENSIONS	Top View	Side View	Dimensions
IP20	 CUTTABLE EVERY: 6.55 in (166.4 mm)		Width 0.47 in (12 mm) Max Length* 19 ft 7.9 in (6 m) Height 0.09 in (2.3 mm)
IP65	 CUTTABLE EVERY: 6.55 in (166.4 mm)		Width 0.47 in (12 mm) Max Length* 19 ft 7.9 in (6 m) Height 0.12 in (3.0 mm)
IP68	 CUTTABLE EVERY: 6.55 in (166.4 mm)		Width 0.57 in (14.4 mm) Max Length* 19 ft 7.9 in (6 m) Height 0.20 in (5 mm)

OPTIONAL ACCESSORY





































0.5 in. VHB Tape	Flat Mounting Clip	Silicone Clip
 <p>Provides superior holding power in surface mounted applications Part Number: VHBTAPE0.5BK</p>	 <p>For mounting IP20/IP65 RibbonLyte Part Number: RBMNTSIL</p>	 <p>For mounting IP68 RibbonLyte Part Number: RBMNTSILW</p>

Note: RibbonLyte comes with an adhesive backing, but Acolyte recommends using VHB Tape for extra support in surface mounted applications.

USAGE GUIDELINES

- IP65 and IP68 RibbonLyte cannot be cut in the field. All custom cuts and connections for these models must be performed at the factory to ensure waterproofing standards are met. Any modification of the waterproofing will result in a void warranty.
- When installing this product, consider the surface temperature of the material where it will be mounted. Many building surfaces which are exposed to direct sunlight exceed the 70° C / 158° F maximum for which our product is rated. High-risk locations like this should be avoided.
- IP20 RibbonLyte products are for indoor use in dry areas. IP65 RibbonLyte products can be used in indoor dry/damp locations such as bathrooms and kitchens. IP68 RibbonLyte products can be used in wet, outdoor locations around pools and spa tubs, but our products are not intended to be submerged in pools and fountains and do not carry UL676 certification to do so.
- Please refer to the RibbonLyte Proper Usage Guide in our Application Guide for more information. Available for download at AcolyteLED.com.
- This product is compatible with a wide variety of control products including the entire line of Lutron dimming systems.
- For use with Acolyte drivers, 0-10V dimming modules and interface controllers (DMXINF models).
- Use with non-Acolyte supplied drivers is not supported or warrantied.
- Due to the nature of RibbonLyte products, cuttable lengths are generally longer or shorter than the customer requested length. Unless specified, RibbonLyte is factory cut at the shorter cuttable point.
- We reserve the right to make changes to product lineup, specifications, design and finishes at any time without notice.

CHANNEL COMPATIBILITY / CHANNEL OPTIONS


CHANNEL	IP20 IP65	IP68	SURFACE MOUNTED CHANNELS										
			LENS OPTIONS:	C - Clear	F - Frosted	K - Black	M - Milky	NP - Narrow Prismatic	WP - Wide Prismatic	RM - Round Milky	SM - Square Milky		
AC1	✓												
AC2	✓												
AC3	✓												
AC4	✓	✓											
AC5	✓	✓											
AC14	✓												
AP1	✓	✓	AC1 C, F, M	AC2 C, F, M	AC3 C, F, M	AC4 C, F, M	AC5 C, F, M	AC14 SM	AP1 C, K, M, SM	AS1 C, F, M			
AR1	✓												
AR2	✓												
AR3	✓	✓											
AR5													
AR8													
AR10			AS2 C, F, M	AS3 C, F, M	AS6 C, F, M	AS12 RM	AS14 SM	AS16 C, K, M	AS23 C, K, M, SM	AT4 C, F, M			
AR14	✓												
AR16	✓	✓											
AR20	✓	✓											
AR23													
AR25													
AR30			AT5 C, F, M	AT11 C, F, M	AW12 C, K, M, RM	AW14 C, K, M	B1 C, F, M	B2 RM	C22 C, F, M	GL2 C, F, M			
AR33													
AS1	✓												
AS2	✓												
AS3	✓	✓											
AS6	✓	✓											
AS10			ROUND C, F, M	ROUND12 C, K, M	ROUND20 C, K, M								
AS12	✓	✓											
AS13													
AS14	✓												
AS16	✓	✓											
AS20G													
AS23	✓	✓											
AS28													
AS30													
AS53													
AT4	✓	✓											
AT5	✓	✓											
AT11	✓												
AW10													
AW12	✓												
AW14	✓												
AW35													
AW38													
AW40			AR1 C, F, M	AR2 C, F, M	AR3 C, F, M	AR14 SM	AR16 C, K, M	AR20 C, K, M, SM	GL1 C, F, M	SC3 M			
B1	✓												
B2	✓												
C22	✓	✓											
GL1	✓												
GL2	✓												
ROUND	✓		SC6 C, K, M, SM										
ROUND12	✓												
ROUND20	✓	✓											
SC1													
SC2													
SC3	✓												
SC4													
SC5													
SC6	✓	✓											
SC-CORNER1													
SC-CORNER2													
ST10													
W31													
WH35													

DISCLAIMER

When installing this product take into account the surface temperature of the material this product is mounted to. Many building surfaces which are exposed to direct sunlight exceed the 70°C/158°F maximum that our product is rated for. High risk locations like this should be avoided. Our IP68 product is not intended to be submerged in pools and fountains and does not carry UL676 certification to do so.

WIRING DIAGRAMS

DMX

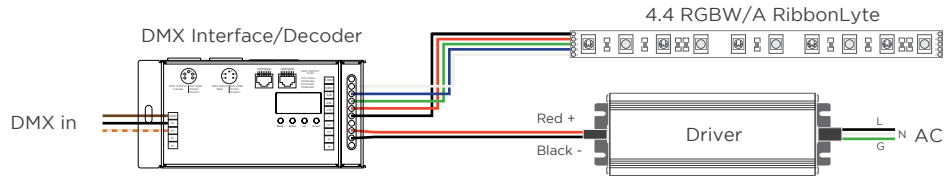

WIRE COLORS PER RIBBONLYTE COLOR

- RGBW & RGBA**
 Black (+) Positive
 Red Wire (-) goes to Red Channel
 Green Wire (-) goes to Green Channel
 Blue Wire (-) goes to Blue Channel
 White Wire (-) goes to White Channel