



Date	Project
Notes	

## RGB DIRECT AC RIBBONLYTE

Acolyte's RGB Direct AC RibbonLyte extends up to 100 ft on a single run with no drivers - perfect for long coves and other large spaces. It is factory cuttable every 1 foot.

- Directly input 120 Volts AC
- Max run length: 100 ft (30.48 m)
- Red, Green, Blue (color changing)
- Factory cuttable every 1 ft (304.8 mm)
- IP65
- Dimmable and color tunable with DMX controller
- Mounting clips included

### Applications:

Commercial  
Entertainment  
Healthcare

Hospitality  
Museums  
Public Spaces

Residential  
Retail



**IP65**

## ORDERING GUIDE

Category	CRI	Ribbon Type & IP Rating	Wattage + Color
RB	0	AC12065	3.0RGB
RB - RibbonLyte	0 - RGB	AC12065 - Direct AC 120V IP65	3.0RGB - 3.0 RGB

### Connection Options:

- 2 meter cable to bare wire (6 ft 6.74 in.)
- 8 meter cable to bare wire (26 ft 3 in.)
- 6 cm jumper cable (2.4 in.)
- 30 cm jumper cable (11.81 in.)
- 4 meter jumper cable (13 ft 1.48 in.)

### Included Accessories:

Mounting Clip (1 clip per linear foot)

### Optional Accessories:

#### Waterproof Cable Connector

(Part No.: COUPT654BK) see page 4 for instruction

#### 120V DMX Interface Decoder

(Part No.: DMXINF120RGB) see page 6 for instruction


## AVAILABLE COLOR TEMPERATURES






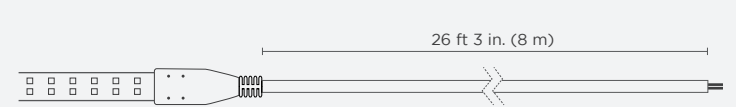
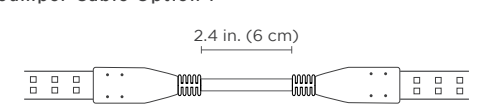
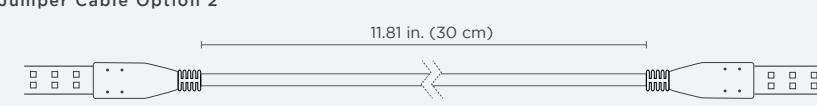
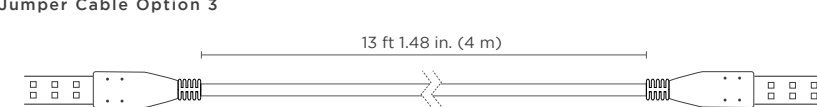
RGB

SPECIFICATIONS / DIMENSIONS / CHANNEL COMPATIBILITY

SPECIFICATIONS				
Operating Voltage	120VAC			
Power Consumption	3 W/ft (9.8 W/m)			
Current (mA)	25 mA/ft (82 mA/m)			
LED Pitch	36 LEDs/ft (120 LEDs/m)			
Protection Rating	IP65			
Dimming/Control	DMX			
Ambient Temperature	-4° F - 113° F (-20° C - 45° C)			
Color Temperatures	Red	Green	Blue	ALL
Wavelength (nm)	620 - 628	525 - 531	470 - 475	
Lumens	28 lm/ft (92 lm/m)	71 lm/ft (233 lm/m)	18 lm/ft (59 lm/m)	124 lm/ft (407 lm/m)
LED Beam Angle	150°			
Efficacy (lm/w)	29.6	79.9	22.6	43.4
Cutable Length	1 ft (304.8 mm) Please account for the 20±5 mm RibbonLyte inside of the power feed cap and end cap when calculating the total run length. (Each run contains a total of 40±10 mm in the end caps) See next page for details.			
Max Run length	100 ft (30.48 m)			
Cable Length	2 meter cable to bare wire (6 ft 6.74 in.); 8 meter cable to bare wire (26 ft 3 in.); 6 cm jumper cable (2.4 in.); 30 cm jumper cable (11.81 in.); 4 meter jumper cable (13 ft 1.48 in.)			
Certifications	ETL Listed			
Max Operating Temperature	113° F (45° C)			

Dimensions	DIRECT AC RIBBONLYTE	MOUNTING CLIP (includes 2 clips per foot)
		
Width	0.73 in. / 18.5 mm (end cap and cable grip width: 1.44 in. / 36.6 mm)	0.94 in. / 23.9 mm
Length	100 ft (30 m) max run length Factory cuttable every 1 ft (304.8 mm)	0.71 in. / 18.0 mm
Height	0.28 in. (7.1 mm)	0.48 in. / 12.2 mm

DIAGRAMS

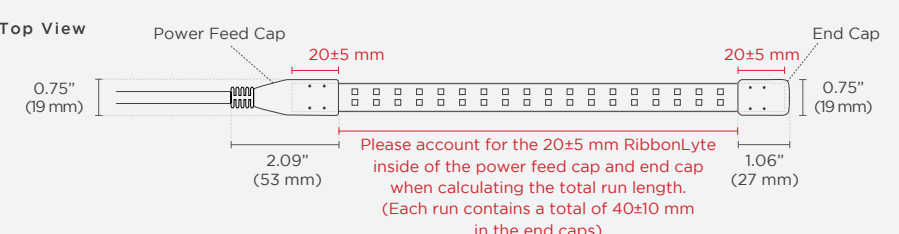
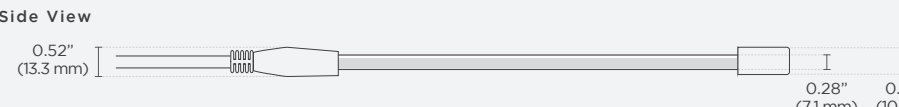
Power Feed Cap & End Cap Dimensions	<p><b>Top View</b></p>  <p><b>Side View</b></p>  <p><b>Width of End Cap:</b> 0.75 in (19 mm)  <b>Length of End Cap:</b> 1.06 in (27 mm)  <b>Height of End Cap:</b> 0.39 in (10 mm)</p> <p><b>Height of RibbonLyte:</b> 0.28 in (7.1 mm)  <b>Width of Power Feed Cap:</b> 0.75 in (19 mm)  <b>Length of Power Feed Cap:</b> 2.09 in (53 mm)  <b>Height of Power Feed Cap:</b> 0.52 in (13 mm)</p>
Power Feed Options	<p><b>Power Feed Option 1</b></p>  <p>6 ft 6.74 in. (2 m)</p> <p><b>2 meter cable to bare wire</b>  Cable length: 6 ft 6.74 in. (2 m)</p> <p><b>Power Feed Option 2</b></p>  <p>26 ft 3 in. (8 m)</p> <p><b>8 meter cable to bare wire</b>  Cable length: 26 ft 3 in. (8 m)</p>
Jumper Cable Options	<p><b>Jumper Cable Option 1</b></p>  <p>2.4 in. (6 cm)</p> <p><b>6 cm jumper cable (for daisy chains)</b>  Jumper cable length: 2.4 in. (6 cm)</p> <p><b>Jumper Cable Option 2</b></p>  <p>11.81 in. (30 cm)</p> <p><b>30 cm jumper cable (for daisy chains)</b>  Jumper cable length: 11.81 in. (30 cm)</p> <p><b>Jumper Cable Option 3</b></p>  <p>13 ft 1.48 in. (4 m)</p> <p><b>4 meter jumper cable (for daisy chains)</b>  Jumper cable length: 13 ft 1.48 in. (4 m)</p>

## SPECIFICATIONS

We provide 2m and 8m power feed solutions. If additional length is needed use the cable coupler.

Part No. : COUPT654BK

Dimensions ( Part Number: COUPT654BK )

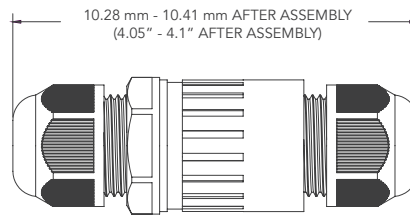


### The Connector



Length: 4.05" - 4.10" After Assembly  
Diameter: 1.06" MAX

### Exploded View of the Connector

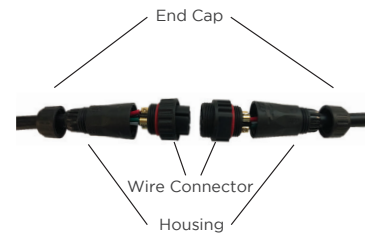

### Step 1



Assemble cable from one end of the connector as shown above.

### Step 2



Assemble cable from the other end of the connector as shown above. Make sure the wires go to their corresponding terminals (e.g. wire color matches to each other).

### Step 3



Tighten two housings together and insert the rubber parts at the housing ends.

### Step 4




Tighten two end caps.

## USAGE GUIDELINES:


- IP65 RibbonLyte are not field cuttable. All custom cuts and connections for these models must be performed at the factory to ensure waterproofing standards are met. Any modification of this on the field or by end user will result in a voided warranty.
- When installing this product take into account the surface temperature of the material this product is mounted to. Many building surfaces exceed the 45° C / 113° F maximum that our product is rated for. High-risk locations like this should be avoided. Avoid direct sunlight.
- This product is not intended to be submerged in pools and fountains and do not carry UL676 certification to do so.
- Please refer to our RibbonLyte Proper Use Guide in our *Application Guide* for more information. Available for download at [www.GENLEDBrands.com/Acolyte](http://www.GENLEDBrands.com/Acolyte)
- Compatible with a wide variety of control products including the entire line of Lutron dimming systems.
- For use with Acolyte drivers, 0-10V dimming modules and interface controllers (DMXINF models).
- Use with non-Acolyte supplied Triac, MLV or ELV drivers is not supported or warranted.
- Due to the nature of the product, RibbonLyte cuttable lengths are generally longer or shorter than the customer requested length. Unless specified, RibbonLyte is factory cut at the shorter cuttable point.
- We reserve the right to make changes to product lineup, specifications, design and finishes at any time without notice.

## DIMMING SYSTEM WIRING DIAGRAM

### Wiring as DMX Decoder Mode

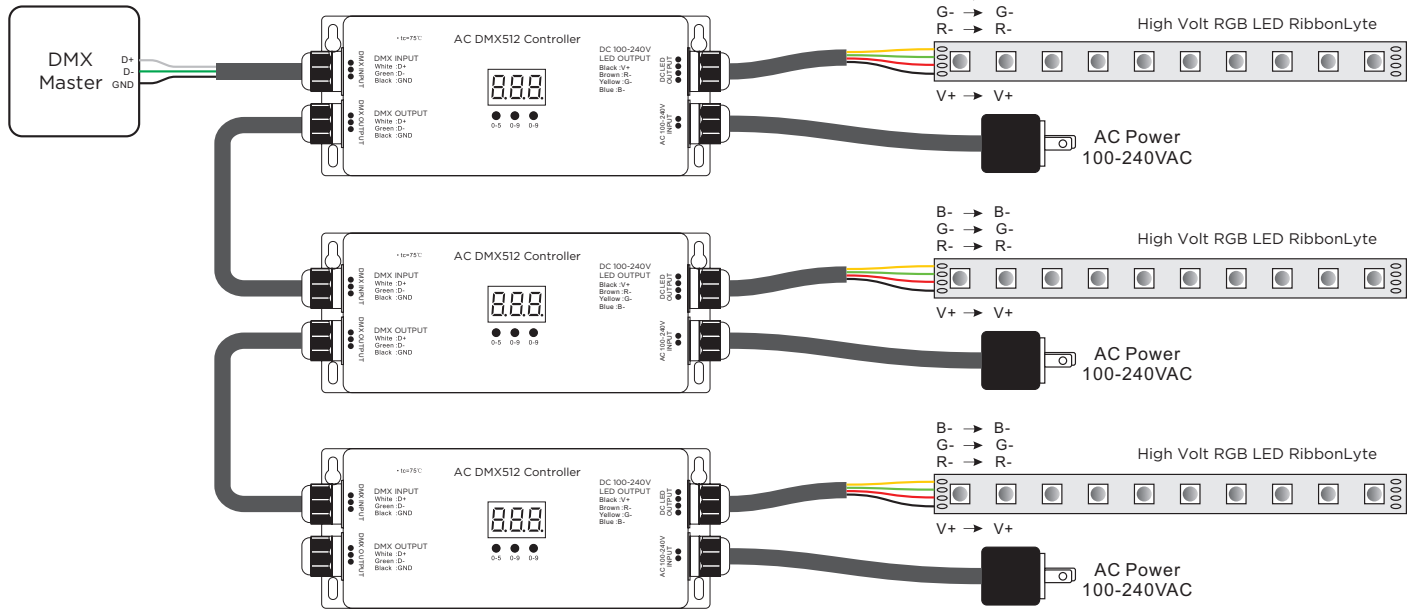

### Wiring as DMX Master Mode

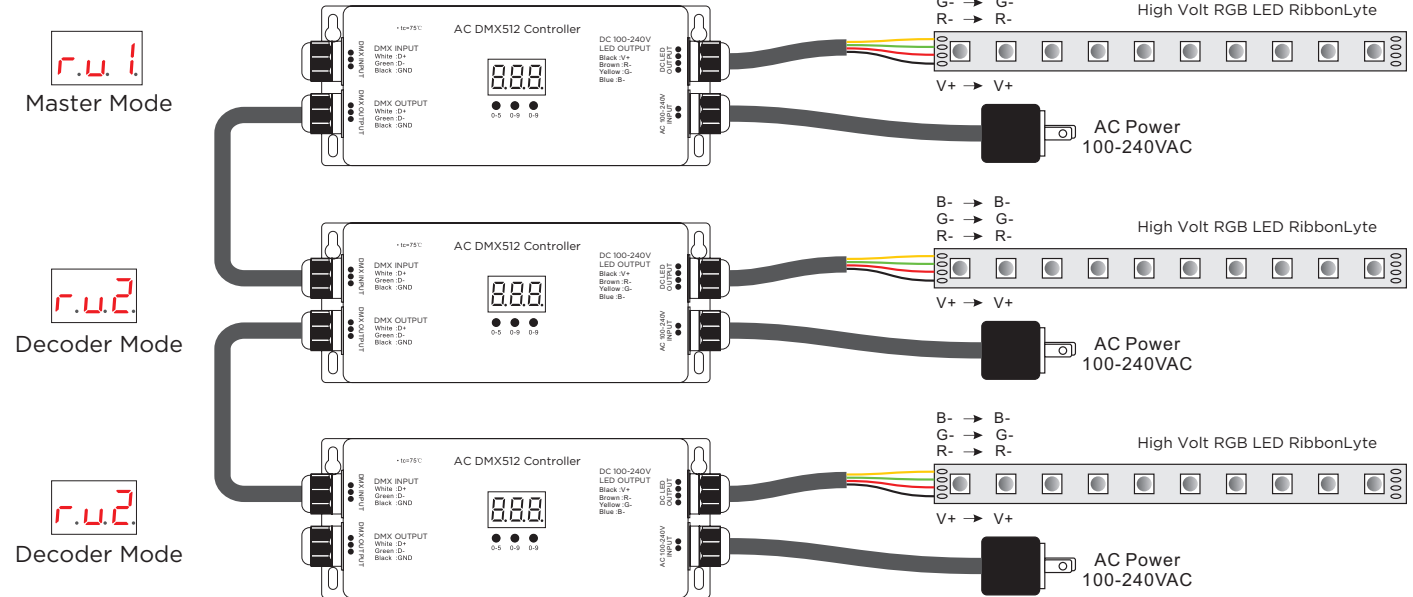

## High Voltage 3 Channel DMX Interface



Width: 2.9 in (73.6 mm)  
Length: 5.93 in (150.5 mm)  
Depth: 1.38 in (35 mm)

Part Number: DMXINF120RGB