

STATIC COLOR SERIES 2 RIBBONLYTE 5.0

Illuminate in color. Our 5.0 Static Color Series 2 RibbonLyte offers 4 different hues. Back light your space with brilliant blue, or warm it up with an amber glow. This version of RibbonLyte maintains your chosen color 100% of the time. For color changing RibbonLyte, please see our RGBW/A RibbonLyte spec sheet.

- Create a custom fixture with our channels
- 4 colors: Red, Amber, Green, and Blue



Applications:

| | | |
|---|---|-----------------------|
| Commercial Entertainment Healthcare | Hospitality Museums Public Spaces | Residential Retail |
|---|---|-----------------------|



ORDERING GUIDE

| Category | CRI | Ribbon Type & IP Rating | Wattage & Color |
|-----------------|-------------------|---|---|
| RB | 0 | | |
| RB - RIBBONLYTE | 0 - Static Colors | SCS220 - Static Color Series 2 IP20 SCS265 - Static Color Series 2 IP65 SCS268 - Static Color Series 2 IP68 | 5.0R - 5.0 W/ft Red 5.0B - 5.0 W/ft Blue 5.0G - 5.0 W/ft Green 5.0A - 5.0 W/ft Amber |

CONNECTION OPTIONS

1. End Feed Bare Wire Connection (Default Option)



2. IP67 Connector Input



3. Soldered Daisy Chain



4. Daisy Chain with IP67 Connectors



5. Bare Wire on Both Ends



Standard cable length if not specified:

- 12 in. cable with bare wire (custom length up to 20 feet)
- Standard 12 in. cable with IP67 connectors (custom length up to 10 feet)
- Daisy chain with 3 in. cable between runs (custom length up to 36 in.)
- 3 in. cable between IP67 connector and RibbonLyte (custom length up to 18 in.)
- Standard 12 in. cable with bare wire (custom length up to 10 feet)







Note: IP67 connectors are used for both IP20 and IP65/IP68 RibbonLyte

AVAILABLE COLORS






SPECIFICATIONS / DIAGRAM / USAGE GUIDELINES

| STATIC COLOR SERIES 2 RIBBONLYTE 5.0 | | | | |
|--------------------------------------|--|-------------------------|--------------------------|-------------------------|
| Operating Voltage | 24 V | | | |
| Power Consumption | 5.0 W/ft (16.4 W/m) | | | |
| Current (mA) - 24V | 208 mA/ft (683 mA/m) | | | |
| LED Pitch | 68 LEDs/ft (224 LEDs/m) | | | |
| Protection Rating | IP20, IP65, IP68 | | | |
| Dimming/Control | MLV / 0-10 Volt / ELV / DALI | | | |
| Operating Temperature | -40° F to 158° F (-40° C to 70° C) | | | |
| Colors | Red | Amber | Green | Blue |
| Lumens | 187 lm/ft (612 lm/m) | 127 lm/ft (415 lm/m) | 595 lm/ft (1952 lm/m) | 124 lm/ft (408 lm/m) |
| LED Beam Angle | 120° | | | |
| Lamp Life | 50,000 Hrs | | | |
| Cutable Length | 1.41 in (35.70 mm) | | | |
| Constant Voltage | ✓ | | | |
| Lumens/Watt | 37 lm/W | 26 lm/W | 116 lm/W | 24 lm/W |
| Certifications | UL 2108 Issued: 2016/06/17 Ed: 1 Rev: 2021/10/16 Low Voltage Lighting Systems. CSA C22.2 No. 250.0, General Requirements for Luminaires. ROHS compliant. | | | |
| Warranty | IP20: 6 years, IP65/68: 3 years | | | |

| 24V DIMENSIONS | Top View | Side View | Dimensions |
|----------------|---|---|--|
| IP20 |  CUTTABLE EVERY: 1.41 in (35.70 mm) |  | Width 0.39 in (10 mm) Max Length* 30 ft (9.14 m) Height 0.06 in (1.45 mm) |
| IP65 |  CUTTABLE EVERY: 1.41 in (35.70 mm) |  | Width 0.39 in (10 mm) Max Length* 30 ft (9.14 m) Height 0.1 in (2.5 mm) |
| IP68 |  CUTTABLE EVERY: 1.41 in (35.70 mm) |  | Width 0.52 in (13.21 mm) Max Length* 30 ft (9.14 m) Height 0.18 in (4.5 mm) |

OPTIONAL ACCESSORY

| 0.5 in. VHB Tape | Flat Mounting Clip | Silicone Clip |
|--|--|--|
|  <p>Provides superior holding power in surface mounted applications Part Number: VHBTAPE0.5BK</p> |  <p>For mounting IP20/IP65 RibbonLyte Part Number: RBMNTSIL</p> |  <p>For mounting IP68 RibbonLyte Part Number: RBMNTSILW</p> |


































Note: RibbonLyte comes with an adhesive backing, but Acolyte recommends using VHB Tape for extra support in surface mounted applications.

USAGE GUIDELINES

- IP65 and IP68 RibbonLyte cannot be cut in the field. All custom cuts and connections for these models must be performed at the factory to ensure waterproofing standards are met. Any modification of the waterproofing will result in a void warranty.
- When installing this product, consider the surface temperature of the material where it will be mounted. Many building surfaces which are exposed to direct sunlight exceed the 70° C / 158° F maximum for which our product is rated. High-risk locations like this should be avoided.
- IP20 RibbonLyte products are for indoor use in dry areas. IP65 RibbonLyte products can be used in indoor dry/damp locations such as bathrooms and kitchens. IP68 RibbonLyte products can be used in wet, outdoor locations around pools and spa tubs, but our products are not intended to be submerged in pools and fountains and do not carry UL676 certification to do so.
- Please refer to the RibbonLyte Proper Usage Guide in our Application Guide for more information. Available for download at AcolyteLED.com.
- This product is compatible with a wide variety of control products including the entire line of Lutron dimming systems.
- For use with Acolyte drivers, 0-10V dimming modules and interface controllers (DMXINF models).
- Use with non-Acolyte supplied drivers is not supported or warrantied.
- Due to the nature of RibbonLyte products, cuttable lengths are generally longer or shorter than the customer requested length. Unless specified, RibbonLyte is factory cut at the shorter cuttable point.
- We reserve the right to make changes to product lineup, specifications, design and finishes at any time without notice.

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

CHANNEL COMPATIBILITY / CHANNEL OPTIONS

| CHANNEL | IP20 IP65 | IP68 | SURFACE CHANNELS | | | | | |
|---------|--------------|------|---|---|--|---|---|---|
| AC1 | ✓ | |  |  |  |  |  |  |
| AC2 | ✓ | | | | | | | |
| AC3 | ✓ | | | | | | | |
| AC4 | ✓ | ✓ | | | | | | |
| AC5 | ✓ | ✓ | | | | | | |
| AR1 | ✓ | | | | | | | |
| AR3 | ✓ | ✓ |  |  |  |  |  |  |
| AR10 | | | | | | | | |
| AR16 | ✓ | ✓ | | | | | | |
| AR20 | ✓ | ✓ | | | | | | |
| AR25 | ✓ | ✓ | | | | | | |
| AR30 | ✓ | ✓ | | | | | | |
| AR33 | | | | | | | | |
| AS1 | ✓ | | | | | | | |
| AS2 | ✓ | ✓ | | | | | | |
| AS3 | ✓ | ✓ | | | | | | |
| AS6 | ✓ | ✓ | | | | | | |
| AS10 | | |  |  |  |  |  |  |
| AS13 | ✓ | ✓ | | | | | | |
| AS16 | ✓ | ✓ | | | | | | |
| AS20G | ✓ | | | | | | | |
| AS23 | ✓ | ✓ | | | | | | |
| AS30 | ✓ | ✓ | | | | | | |
| AS53 | | | | | | | | |
| AT4 | ✓ | ✓ | | | | | | |
| AT5 | ✓ | ✓ | | | | | | |
| AW12 | ✓ | | | | | | | |
| AW14 | ✓ | ✓ | | | | | | |
| AW38 | ✓ | ✓ | | | | | | |
| B1 | ✓ | | | | | | | |
| SC3 | ✓ | | | | | | | |
| SC4 | ✓ | ✓ | | | | | | |
| SC5 | ✓ | ✓ | | | | | | |
| WH35 | ✓ | ✓ | | | | | | |
| | | | CORNER CHANNELS | | | | | |
| AC1 | ✓ | ✓ |  |  |  |  |  | |
| AC2 | ✓ | ✓ | | | | | | |
| AC3 | ✓ | ✓ | | | | | | |
| AC4 | ✓ | ✓ | | | | | | |
| AC5 | ✓ | ✓ | | | | | | |
| | | | RECESSED CHANNELS | | | | | |
| AR1 | ✓ | |  |  |  |  |  |  |
| AR3 | ✓ | | | | | | | |
| AR16 | ✓ | | | | | | | |
| AR20 | ✓ | | | | | | | |
| AR25 | ✓ | | | | | | | |
| AR30 | ✓ | | | | | | | |
| | | | MUD-IN CHANNELS | | | | | |
| AW14 | ✓ | |  | | | | | |
| SC3 | ✓ | | |  |  |  | | |
| SC4 | ✓ | | | | | | | |
| SC5 | ✓ | | | | | | | |


DISCLAIMER

When installing this product take into account the surface temperature of the material this product is mounted to. Many building surfaces which are exposed to direct sunlight exceed the 70°C/158°F maximum that our product is rated for. High risk locations like this should be avoided.


Our IP68 product is not intended to be submerged in pools and fountains and does not carry UL676 certification to do so.

WIRING DIAGRAMS


0-10V

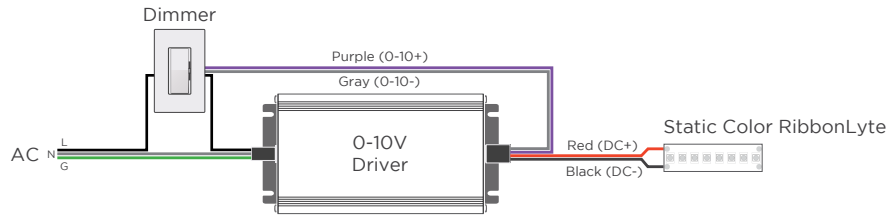

MLV / ELV

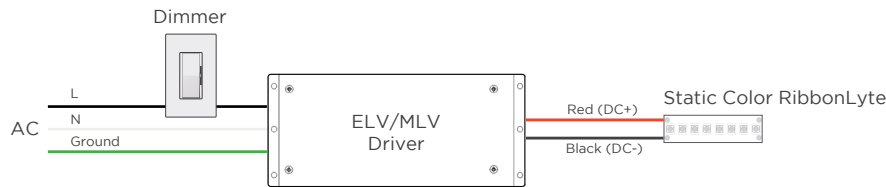

DMX

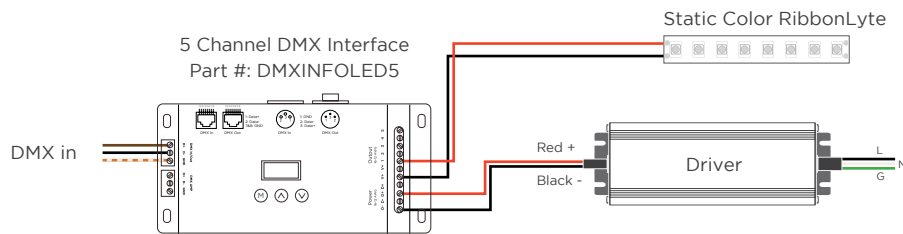

WIRE COLORS PER RIBBONLYTE COLOR

STATIC COLOR SERIES 2
Red Wire (+) Positive
Black Wire (-) Negative

ACTUAL POWER CONSUMPTION

| Length (ft) | Length (m) | Actual Power Consumed (W) | Average Wattage (W/ft) | Average Wattage (W/m) | Actual Current Drawn (A) |
|-------------|------------|---------------------------|------------------------|-----------------------|--------------------------|
| 5 | 1.52 | 25.02 | 5.00 | 16.41 | 1.043 |
| 10 | 3.05 | 47.74 | 4.77 | 15.66 | 1.989 |
| 15 | 4.57 | 67.73 | 4.52 | 14.81 | 2.822 |
| 20 | 6.10 | 84.93 | 4.25 | 13.93 | 3.539 |
| 25 | 7.62 | 95.32 | 3.81 | 12.51 | 3.972 |
| 30 | 9.15 | 99.93 | 3.33 | 10.93 | 4.164 |

NOTE: Quotes use nominal values. We highly recommend using nominal wattages for all customer calculations. Allow for a 15% buffer (10% driver, 5% fixture) in these calculations as performance may vary. Acolyte is not liable for product performance if these tables are used instead of nominal values when orders are placed.

REV.16JUL2024

GLOBAL HQ

320 Murray Hill Pkwy
East Rutherford, NJ 07073
T: (+1) 212 629 6830
E: Sales-US@GENLEDBrands.com

EUROPEAN HQ

De Corridor 16K
36212B Breukelen
Netherlands
T: (+31) 346 235 000
E: SalesEurope@GENLEDBrands.com

MEINA HQ

PO Box 371378, #823, Building 4EA
Dubai Airport Free Zone, Dubai, UAE
T: (+971) 4 701 7901
E: SalesMEINA@genlebrands.com

ASIA-PACIFIC HQ

Room 402, Building D
Shensi Tongchuang Science and Technology Park
No. 16 Hongyin Road
Xingqiang Community, Xihu Street
Guangming District, Shenzhen, China 518107
Sales: (+86) 139 1836 3905
Office: (+86) 755 8529 0710
E: Sales-Pacific@GENLEDBrands.com

[linkedin.com/company/genledacolyte](https://www.linkedin.com/company/genledacolyte)

[facebook.com/acolyteled](https://www.facebook.com/acolyteled)

[instagram.com/acolyte_led](https://www.instagram.com/acolyte_led)