

1.0 VARIABLE WHITE SERIES 2 RIBBONLYTE

Our Variable White Series 2 RibbonLyte allows you to adjust for brightness and warmth like never before. Now with 140 LEDs per meter, our improved RibbonLyte provides better color mixing, reduced diode visibility and a wider range of color temperatures for tuning your lighting design. Available in three wattages and with a 50 mm cut length, you can use Variable White Series 2 RibbonLyte with a 2-channel dimmer to create bright, clear, colder light or the warmest, softest tones.

- Single-row, dual-chip layout means 140 LEDs per meter (42 LEDs per foot!)
- Available in three (3) wattages (1W/ft, 3W/ft, 6W/ft)
- 50 mm cut length adds amazing flexibility to your design
- Color temperature range of 2000K to 6500K and 90+ CRI
- 2-channel dimming! One channel controls brightness and one controls temperature
- Closet rated (standalone or surface channels)



AVAILABLE COLOR TEMPERATURES



VW



RoHS

IP20

IP65

IP68

ORDERING GUIDE

| Category | CRI | Ribbon Type & IP Rating | Wattage + Color |
|-----------------|--------------------|---|----------------------------|
| RB | 0 | | 1.0VW |
| RB - Ribbonlyte | 0 - Color Changing | VWS220 - VW Series 2 IP20 VWS265 - VW Series 2 IP65 VWS268 - VW Series 2 IP68 | 1.0VW - 1.0 Variable White |

CONNECTION OPTIONS

1. End Feed Bare Wire Connection (Default Option)



2. IP67 Connector Input



3. Soldered Daisy Chain



4. Daisy Chain with IP67 Connectors



5. Bare Wire on Both Ends



Standard cable length if not specified:

1. 12 in. cable with bare wire (custom length up to 20 feet)
2. Standard 12 in. cable with IP67 connectors (custom length up to 10 feet)
3. Daisy chain with 3 in. cable between runs (custom length up to 36 in.)
4. 3 in. cable between IP67 connector and RibbonLyte (custom length up to 18 in.)
5. Standard 12 in. cable with bare wire (custom length up to 10 feet)

Note: IP67 connectors are used for both IP20 and IP65/IP68 RibbonLyte

USAGE GUIDELINES

- IP65 and IP68 RibbonLyte cannot be cut in the field. All custom cuts and connections for these models must be performed at the factory to ensure waterproofing standards are met. Any modification of the waterproofing will result in a void warranty.
- When installing this product, consider the surface temperature of the material where it will be mounted. Many building surfaces which are exposed to direct sunlight exceed the 70° C / 158° F maximum for which our product is rated. High-risk locations like this should be avoided.
- IP20 RibbonLyte products are for indoor use in dry areas. IP65 RibbonLyte products can be used in indoor dry/damp locations such as bathrooms and kitchens. IP68 RibbonLyte products can be used in wet, outdoor locations around pools and spa tubs, but our products are not intended to be submerged in pools and fountains and do not carry UL676 certification to do so.
- Please refer to the RibbonLyte Proper Usage Guide in our Application Guide for more information. Available for download at AcolyteLED.com.
- This product is compatible with a wide variety of control products including the entire line of Lutron dimming systems.
- For use with Acolyte drivers, 0-10V dimming modules and interface controllers (DMXINF models).
- Use with non-Acolyte supplied drivers is not supported or warrantied.
- Due to the nature of RibbonLyte products, cuttable lengths are generally longer or shorter than the customer requested length. Unless specified, RibbonLyte is factory cut at the shorter cuttable point.
- We reserve the right to make changes to product lineup, specifications, design and finishes at any time without notice.

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.



SPECIFICATIONS / DIAGRAM / USAGE GUIDELINES

| 1.0 VARIABLE WHITE SERIES 2 RIBBONLYTE | |
|--|---|
| Operating Voltage | 24 V |
| Power Consumption | 1.0 W/ft (3.3 W/m) |
| Current (mA) - 24V | 41.7 mA/ft (137 mA/m) |
| LED Pitch | 42 LEDs/ft (140 LEDs/m) |
| Protection Rating | IP20, IP65, IP68 |
| Dimming/Control | DMX / 0-10V with Dimming Module |
| Operating Temperature | -40° F to 140° F (-40° C to 60° C) |
| Color Temperatures | 2000K - 6500K (IP20) 2000K - 6000K (IP65/IP68) |
| MacAdam Ellipses (SDCM) | 2-Step Binning |
| Maximum Light Output | 2-Channel 0-10V Dimming*: 40-48 lm/ft (130-158 lm/m) DMX Dimming: 86 lm/ft (282 lm/m) |
| Binning Tolerance | +/- 100K |
| LED Beam Angle | 120° |
| Lamp Life | 43,000 hrs L70 @ 131° F (55° C) |
| Cutable Length | 1.97 in. (50mm) |
| Lumens/Watt | 77 - 95 lm/W (Warm - Cool LED) |
| Constant Voltage | ✓ |
| Cable Length | 12 in. (30.5 cm) |
| Certifications | UL 2108 Issued: 2016/06/17 Ed: 1 Rev: 2021/10/16 Low Voltage Lighting Systems. CSA C22.2 No. 250.0, General Requirements for Luminaires. ROHS compliant UL 2108. Suitable for use in closets, compliant with NFPA® 70, NEC® Section 410.16 (A)(3) and 410.16 (C)(5). |

*2-Channel 0-10V Dimming maintains a consistent light output level while changing color temperatures.

| 24V DIMENSIONS | Top View | Side View | Dimensions |
|----------------|--------------------------------------|-----------|--|
| IP20 | CUTTABLE EVERY: 1.97 in. (50 mm) | | Width 0.31 in. (8 mm) Max Length* 32 ft 8 in. (10 m) Height 0.09 in. (2.3 mm) |
| IP65 | CUTTABLE EVERY: 1.97 in. (50 mm) | | Width 0.31 in. (8mm) Max Length* 32 ft 8 in. (10 m) Height 0.125 in. (3.2 mm) |
| IP68 | CUTTABLE EVERY: 1.97 in. (50 mm) | | Width 0.44 in. (11.2 mm) Max Length* 32 ft 8 in. (10 m) Height 0.18 in. (4.5 mm) |

OPTIONAL ACCESSORY

| 0-10V Dimmable 90W VW/WD Driver | Flat Mounting Clip | Silicone Clip | 0.5 in. VHB Tape** |
|-----------------------------------|--|--|--|
| Part Number: DRVRFWDVW2490120 | For mounting IP20/IP65 RibbonLyte Part Number: RBMNTSIL | For mounting IP68 RibbonLyte Part Number: RBMNTSILW | Provides superior holding power in surface mounted applications Part Number: VHBTAPE0.5BK |

EXAMPLE: When calculating supported loads with this module and 6.0 Variable White RibbonLyte (6.0 W/ft), you can divide the module's total rated power of 96W by half of the RibbonLyte's wattage per foot to get the total length supported. $96 / 3 = 32$ ft of RibbonLyte.

** RibbonLyte comes with an adhesive backing, but Acolyte recommends using VHB Tape for extra support in surface mounted applications.

CHANNEL COMPATIBILITY / CHANNEL OPTIONS

| CHANNEL | IP20 IP65 | IP68 | SURFACE MOUNTED CHANNELS | | | | | | | | |
|---------|--------------|------|--|------------------|------------------|---------------------|-----------------|---------------------|---------------------|--------------------|--|
| | | | LENS OPTIONS: C - Clear F - Frosted K - Black M - Milky NP - Narrow Prismatic WP - Wide Prismatic RM - Round Milky SM - Square Milky | | | | | | | | |
| AC1 | ✓ | ✓ | | | | | | | | | |
| AC2 | ✓ | ✓ | | | | | | | | | |
| AC3 | ✓ | ✓ | | | | | | | | | |
| AC4 | ✓ | ✓ | | | | | | | | | |
| AC5 | ✓ | ✓ | | | | | | | | | |
| AR1 | ✓ | | AC1 C, F, M | AC2 C, F, M | AC3 C, F, M | AC4 C, F, M | AC5 C, F, M | AS1 C, F, M | AS2 C, F, M | AS3 C, F, M | |
| AR3 | ✓ | ✓ | | | | | | | | | |
| AR8 | ✓ | | | | | | | | | | |
| AR10 | ✓ | | | | | | | | | | |
| AR16 | ✓ | ✓ | AS6 C, F, M | AS10 C, M | AS12 RM | AS13 RM, SM | AS16 C, K, M | AS20G G | AS23 C, K, M, SM | AS30 M, RM, SM | |
| AR20 | ✓ | ✓ | | | | | | | | | |
| AR25 | ✓ | ✓ | | | | | | | | | |
| AR30 | ✓ | ✓ | | | | | | | | | |
| AR33 | | | | | | | | | | | |
| AS1 | ✓ | | AT4 C, F, M | AT5 C, F, M | AW10 C, K, M | AW12 C, K, M, RM | AW14 C, K, M | B1 C, F, M | B2 RM | ROUND12 C, K, M | |
| AS2 | ✓ | ✓ | | | | | | | | | |
| AS3 | ✓ | ✓ | | | | | | | | | |
| AS6 | ✓ | ✓ | | | | | | | | | |
| AS10 | ✓ | | WH35 C, F, M | | | | | | | | |
| AS12 | ✓ | ✓ | | | | | | | | | |
| AS13 | ✓ | ✓ | | | | | | | | | |
| AS16 | ✓ | ✓ | | | | | | | | | |
| AS20G | ✓ | | RECESSED CHANNELS | | | | | | | | |
| AS23 | ✓ | ✓ | LENS OPTIONS: C - Clear F - Frosted K - Black M - Milky NP - Narrow Prismatic WP - Wide Prismatic RM - Round Milky SM - Square Milky | | | | | | | | |
| AS30 | ✓ | ✓ | | | | | | | | | |
| AS53 | | | | | | | | | | | |
| AT4 | ✓ | ✓ | | | | | | | | | |
| AT5 | ✓ | ✓ | AR1 C, F, M | AR3 C, F, M | AR8 C, F, M | AR10 C, M | AR16 C, M, K | AR20 C, K, M, SM | AR25 M, RM, SM | AR30 M, RM, SM | |
| AW10 | ✓ | | | | | | | | | | |
| AW12 | ✓ | | | | | | | | | | |
| AW14 | ✓ | ✓ | | | | | | | | | |
| AW38 | | | | | | | | | | | |
| B1 | ✓ | | SC3 M | SC4 M, RM, SM | SC5 M, RM, SM | | | | | | |
| B2 | ✓ | | | | | | | | | | |
| ROUND12 | ✓ | | | | | | | | | | |
| SC3 | ✓ | | | | | | | | | | |
| SC4 | ✓ | ✓ | | | | | | | | | |
| SC5 | ✓ | ✓ | | | | | | | | | |
| WH35 | ✓ | ✓ | | | | | | | | | |


DISCLAIMER

When installing this product take into account the surface temperature of the material this product is mounted to. Many building surfaces which are exposed to direct sunlight exceed the 70°C/158°F maximum that our product is rated for. High risk locations like this should be avoided.

Our IP68 product is not intended to be submerged in pools and fountains and does not carry UL676 certification to do so.

WIRING DIAGRAMS

2-CHANNEL VARIABLE WHITE DIMMING

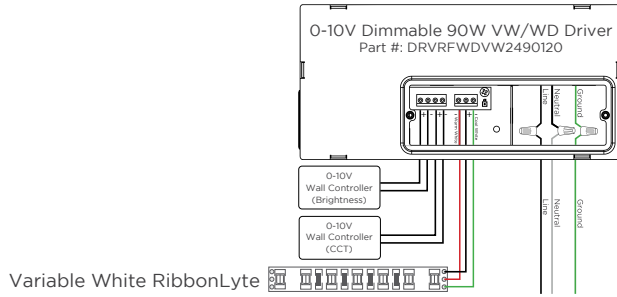

WIRE COLORS PER RIBBONLYTE COLOR

VARIABLE WHITE

- Black Wire (+) Positive
- Red Wire (-) Warm Channel
- Green Wire (-) Cool Channel

DMX WIRING DIAGRAM - COMPATIBLE WITH ALL MODELS OF VARIABLE WHITE RIBBONLYTE

