



AGILIGHT[®]
Innovative Signage Lighting



LYTERAYZ MINI

VALUE LINE

MINIATURE & ULTRA THIN CHANNEL LETTERS | ACRYLIC BLOCK LETTERS | ACCENT LIGHTING

THE LYTERAYZ MINI WHITE & COLOR pack a lot of power into our smallest sign modules. With best-in-class performance for smaller indoor or outdoor channel letters and sign details, LyteRayz™ Mini is an IP67 rated module that's available in static red, green or blue and 8 different static white CCTs.


CE cULus RoHS LM-79 LM-80 IP67




FEATURES	
Luminous Efficacy (White)	111 lm/W (5000K thru 7500K) 100 lm/W (2700K thru 4500K)
Luminous Efficacy (Color)	41 (TRD), 137 (GRN), 26 (BLU)
Wattage per Module (White)	0.18 W Nominal /0.19 W Maximum
Wattage per Module (Color)	0.12 W Nominal 0.13 W Maximum
Input Voltage	12 V DC
Input Current	0.015 A/ module (White) 0.010 A/ module (Color)
Power Supply Loading	306 modules per 60 W (White) 460 modules per 60 W (Color)
Ingress Protection	IP67
Operating Temperature	-40° — +140° F (-40° — +60° C)
L70 Lifetime @ 60° C	50,000 Hours
Warranty	5 Year Limited Warranty

LUMINOUS INTENSITY DISTRIBUTION

L4 Beam Pattern

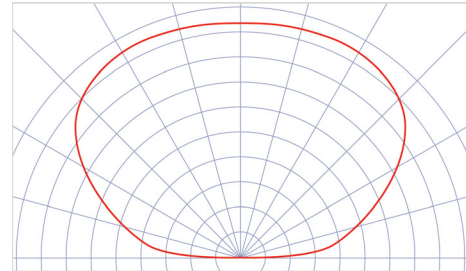

WHITE COLOR TEMPERATURE SCALE

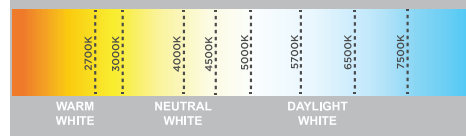

COLOR TEMPERATURE SCALE



MODULE DIMENSIONS

MODULES	Length	Width	Height
LyteRayz™ Mini	0.63 in. / 15.9 mm	0.33 in. / 8.5 mm	0.33 in. / 8 mm

REV.27DEC2022