



AGILIGHT[®]
Innovative Signage Lighting

ULTRA 400 SERIES

LED SIGNAGE MODULES



SHALLOW CHANNEL LETTERS | BOX AND CABINET SIGNS | COVE LIGHTING


ULTRA 400 SERIES - These modules are comprehensive options for super low-profile 1.2 in. (30 mm) to 4 in. (100 mm) signage applications. With three lumen outputs to choose from, the ULTRA 430, ULTRA 450 and ULTRA 470 modules are each available in 7 static white CCTs.

CE **RoHS** **LM-79** **LM-80** **IP68**

| FEATURES | |
|----------------------|--|
| Luminous Efficacy | 113 lm/W (U430) 104 lm/W (U450) 106 lm/W (U470) |
| Module Spacing | 4 in. (100 mm) for U430 only 6 in. (150 mm) for U430, U450, U470 |
| Wattage per Module | 0.3 W (U430) 0.48 W (U450) 0.66 W (U470) |
| Nominal Light Output | 30 - 34 lm/module (U430) 44 - 50 lm/module (U450) 63 - 70 lm/module (U470) |
| Power Supply Loading | 184 modules per 60 W (U430) 115 modules per 60 W (U450) 84 modules per 60 W (U470) |
| Input Current | 0.025 A/modules (U430) 0.04 A/modules (U450) 0.055 A/modules (U470) |
| Depth Range | 1.2 in. (30 mm) to 2 in. (50 mm) (U430) 2 in. (50 mm) to 3 in. (75 mm) (U450) 3 in. (75 mm) to 4 in. (100 mm) (U470) |

LUMINOUS INTENSITY DISTRIBUTION


400 Series Batwing Beam Pattern

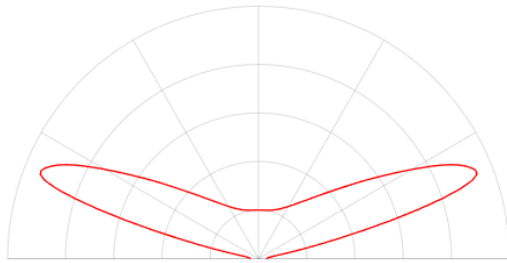


AVAILABLE COLOR TEMPERATURES

7500, 6500K*, 5700K, 5000K, 4000K, 3000K, 2700K


* U430's 100 mm spacing model is only available in 6500K

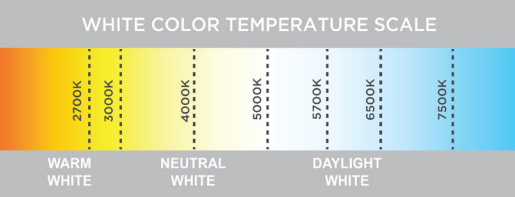

| MODULE DIMENSIONS | | |
|--------------------|--------------------|--------------------|
| Length | Width | Height |
| 1.52 in. / 38.5 mm | 1.03 in. / 26.2 mm | 0.42 in. / 10.6 mm |

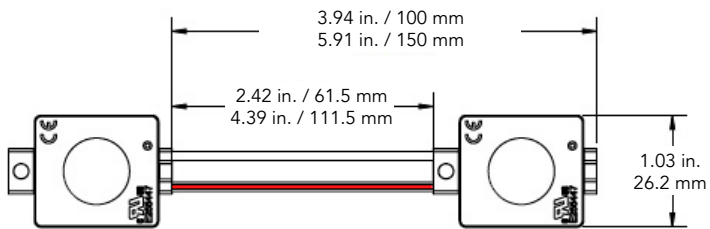

NOTES: WIRE IS 18 AWG / 0.82 mm²
RED STRIPE (+), WHITE (-)



- 12V DC
- 9 Yr
9 YEAR WARRANTY
- MADE IN EUROPE
- ONEWhite[®]
COLOR CONSISTENCY
- VERSALENZ[®]
ADVANCED OPTICS
- CAPZUL[®]
WATERPROOF
- CC
CONSTANT CURRENT
- UV RESISTANT

REV.03MAY2023