



ULTRA MINI COLOR

LED SIGNAGE MODULES


MINIATURE CHANNEL LETTERS | ACRYLIC BLOCK LETTERS | ACCENT LIGHTING

ULTRA MINI — The IP68 rated ULTRA MINI COLOR is popular for illuminating sleek and modern miniature channel letters in vibrant static colors. The ULTRA MINI -- available in true red, green and blue -- enables a broad variety of applications for indoor and outdoor signage, including accent lighting and small sign details.



FEATURES	
Luminous Efficacy	36.9 (TRD), 21.7 (BLU), 96.9 (GRN)
Module Spacing	2 in. (50 mm)
Wattage per Module	0.12 W Nominal
Nominal Light Output	True Red: 4.4 lm/module Blue: 2.6 lm/module Green: 11.6 lm/module
Power Supply Loading	460 modules per 60 W
Input Current	0.01 A/modules

LUMINOUS INTENSITY DISTRIBUTION

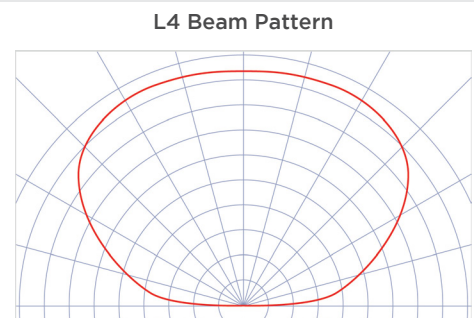

COLOR TEMPERATURE SCALE




Module Color (Face)	Single Row			
	True Red (2793) / Green (7328)		Blue (2051)	
Channel Depth (in.)	Min. Max. Stroke	Module Spacing	Min. Max. Stroke	Module Spacing
1.0 in.	0.31 0.79	1.18	0.31 0.79	0.98
1.6 in.	0.31 1.60	1.97	0.31 1.6	1.97
2.0 in.	0.31 3.25	1.97	0.31 3.25	1.97
25 mm	8 20	30	8 20	25
40 mm	8 40	50	8 40	50
50 mm	8 82	50	8 82	50

Channel Depth (in.)	Multiple Rows			
	Min. Max. Stroke	Module Spacing	Min. Max. Stroke	Module Spacing
1.0 in.	0.79	1.18	0.79	1.18
1.6 in.	1.6	1.97	1.6	1.77
2.0 in.	2.5	1.97	2.5	1.97
25 mm	20	30	20	30
40 mm	40	50	40	45
50 mm	63	50	63	50

MODULE DIMENSIONS

Length	Width	Height
0.7 in. / 17 mm	0.31 in. / 8 mm	0.39 in. / 9.8 mm

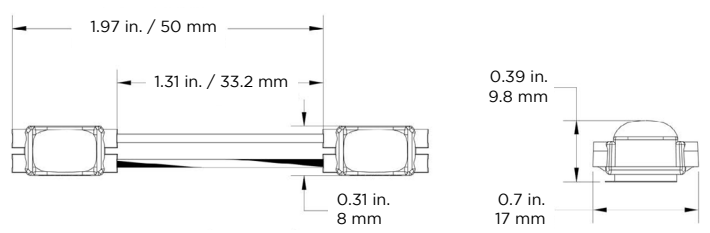

REV.08.JUL.2024