

20 YEARS OF BRILLIANCE

AGILIGHT[®]
Innovative Signage Lighting



ULTRA MINI
LED SIGNAGE MODULES

MINIATURE CHANNEL LETTERS | ACRYLIC BLOCK LETTERS | ACCENT LIGHTING


ULTRA MINI — The IP68 rated ULTRA MINI is popular for illuminating sleek and modern miniature channel letters. The ULTRA MINI features a range of 7 static white CCTs, enabling a broad variety of applications for indoor and outdoor signage, including accent lighting and small sign details.

CE    **RoHS LM-79 LM-80 IP68**

FEATURES	
Luminous Efficacy	108 lm/W
Module Spacing	1.32 in. (33.5 mm) & 2 in. (50 mm)
Wattage per Module	0.20 W Nominal
Nominal Light Output	20 - 24 lm/module
Power Supply Loading	276 modules per 60 W
Input Current	0.017 A/modules
L70 Lifetime	50,000 hours


Channel Depth (in. mm)	Single Row	Single Row	Multiple Rows
	Module Spacing	Module Spacing	Row Spacing
1.0 25	1.18 30	1.18 30	0.79 20
1.6 40	2 50	2 50	1.6 40
2.0 50	2 50	2 50	2.50 63

MODULE DIMENSIONS		
Length	Width	Height
0.7 in. / 17 mm	0.31 in. / 8 mm	0.39 in. / 9.8 mm

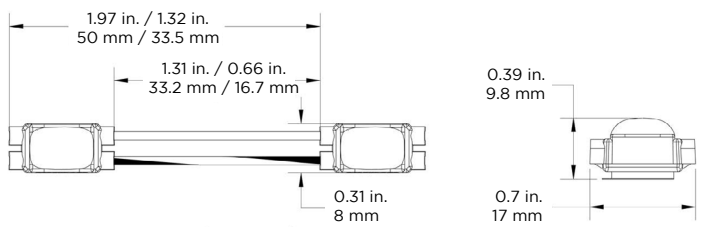

LUMINOUS INTENSITY DISTRIBUTION

L4 Beam Pattern

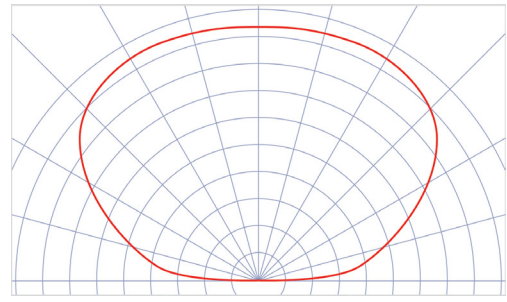

AVAILABLE COLOR TEMPERATURES

8000K, 6500K, 5700K, 5000K, 4000K, 3000K, 2700K

