



Our PRO Premium 2 High Output LED modules feature VersaLentz[®] advanced optics and batwing beam patterns that enable large areas of light coverage. Each PRO Premium module contains an integrated circuit that maintains constant current, so there is no lumen drop across any string of modules. Spaced at 8 inches (200 mm), our 24V PRO Premium 2 High Output modules are rated IP68 and available in 5 brilliant color temperatures from 3000K to 7100K for high-brightness signage.



Applications:

- High-brightness channel letters
- High-brightness box signs
- Cabinet signs
- Accent lighting

ORDERING GUIDE

| Part Number | White Color Temp. | Module Spacing (mm) | Number of Modules | | Nominal Light Output (lm)* | | |
|---------------------------|-------------------|---------------------|-------------------|-----------|----------------------------|----------|-----------|
| | | | Per Foot | Per Meter | Per Module | Per Foot | Per Meter |
| LS-PRO2-24-HO-71K-200-A** | 7100K | 200 | 1.52 | 5 | 80 | 122 | 400 |
| LS-PRO2-24-HO-65K-200-A | 6500K | 200 | 1.52 | 5 | 80 | 122 | 400 |
| LS-PRO2-24-HO-50K-200-A** | 5000K | 200 | 1.52 | 5 | 80 | 122 | 400 |
| LS-PRO2-24-HO-40K-200-A** | 4000K | 200 | 1.52 | 5 | 76 | 116 | 380 |
| LS-PRO2-24-HO-30K-200-A** | 3000K | 200 | 1.52 | 5 | 76 | 116 | 380 |


** Limited stock

* ±10%

PRODUCT RATINGS

| | |
|-----------------------|--------------------------------|
| Luminous Efficacy | 163.3 lm/W @ 6500K |
| Wattage per Module | 0.49 W Nominal |
| Input Voltage | 24 V DC |
| Input Current | 0.020 A/ module |
| Ingress Protection | IP68 |
| Operating Temperature | -40° - +140° F (-40° - +60° C) |
| L70 Lifetime @ 60° C | 70,000 Hours |
| Warranty | 9 Year Limited Warranty |

LUMINOUS INTENSITY DISTRIBUTION

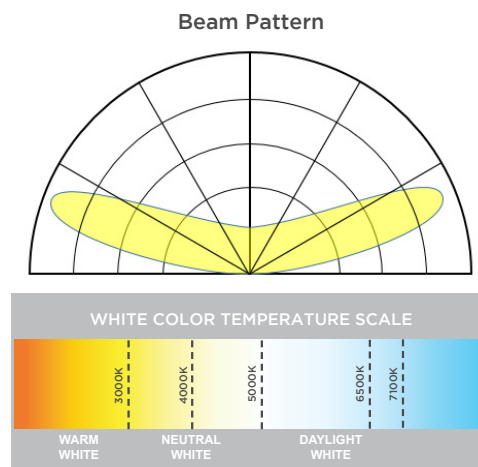

MODULE DIMENSIONS

| Part Number | Length (in/mm) | Width (in/mm) | Height (in/mm) |
|-------------------------|----------------|---------------|----------------|
| LS-PRO2-24-HO-XXX-200-A | 2.26/57.3 | 0.72/18.28 | 0.44/11.25 |



POWER SUPPLY LOADING

| Module Type | | LS-PRO2-24-HO-XXX-200-A | | | |
|--|------------------------------|-------------------------|-----------------|-------------------|------|
| Power Supply (wired in Parallel Strings) | Max. # of Modules Per String | Total # of Modules | Total # of Feet | Total # of Meters | |
| UL Class 2 | 60W | 110 | 115 | 75.5 | 23 |
| | 100W | 144 | 192 | 126 | 38.4 |

REMOTE MOUNTING DISTANCE

| Power Supply | 18AWG (ft/m) | 16AWG (ft/m) | 14AWG (ft/m) | 12AWG (ft/m) |
|--------------|--------------|--------------|--------------|--------------|
| 60W | 20/6.1 | 25/7.6 | 35/10.6 | 40/12.1 |
| 100W | 20/6.1 | 25/7.6 | 35/10.6 | 40/12.1 |

Notes:

1. Power supply always has 8% buffer
2. These values are good for use with Power Supply Loading Table Single String Max Module values

Notes:

1. Loading calculated at 25°C.
2. For maximum loading to be reached, a center connection to the LEDs is recommended to minimize voltage drop.
3. All values include an 8% buffer from maximum load.
4. Single String Max Modules values can be used with the remote mounting to power supply table.

LAYOUT GUIDE*


| Channel Depth (in.) | Single Row | | Multiple Rows | | Channel Depth (mm) | Single Row | | Multiple Rows | |
|---------------------|-------------|----------------|---------------|----------------|--------------------|-------------|----------------|---------------|----------------|
| | Max. Stroke | Module Spacing | Row Spacing | Module Spacing | | Max. Stroke | Module Spacing | Row Spacing | Module Spacing |
| 1.57 | 3.9 | 3.5 | 3.2 | 3.5 | 40 | 100 | 90 | 80 | 90 |
| 2 | 4.9 | 4.3 | 3.9 | 4.3 | 50 | 125 | 110 | 100 | 110 |
| 3 | 7.1 | 6.3 | 5.9 | 6.3 | 75 | 180 | 160 | 150 | 160 |
| 4 | 9.8 | 7.9 | 7.9 | 7.9 | 100 | 250 | 200 | 200 | 200 |
| 5 | 11.8 | 7.9 | 9.8 | 7.9 | 125 | 300 | 200 | 250 | 200 |

*Module spacing is defined to achieve minimum 600 lux at sign face (7328 white)
**Modules are staggered

SHIPPING INFORMATION

| Module Type | Specs | Packaging Quantity | | | Carton Weight | Box Dimensions | | | Carton Dimensions | | | | | | | | | |
|-------------------------|---------|--------------------|---------|------------|---------------|----------------|-----|-----|-------------------|------|------|----|-----|-----|-----|-----|-----|-----|
| | | Per Bag | Per Box | Per Carton | | W | D | H | W | D | H | | | | | | | |
| LS-PRO2-24-HO-XXX-200-A | Modules | 100 | 600 | 1200 | inch | 13.8 | 9.8 | 9.1 | 20.5 | 14.6 | 10.2 | | | | | | | |
| | Feet | 65.6 | 393.7 | 787.4 | | | | | | | | mm | 350 | 250 | 230 | 520 | 370 | 260 |
| | Meters | 20 | 120 | 240 | | | | | | | | | | | | | | |

DIMENSION DRAWING

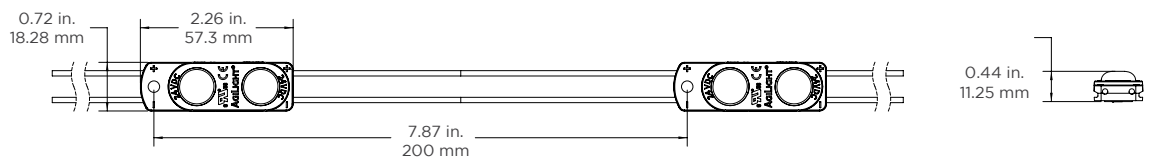

1. UL ONLY - These products are only suitable for connection to a UL rated Class 2 power source rated 24 Volt.
2. UL ONLY - These products are intended for use only when connected to a power source that complies with UL rated Class 2 voltage and energy limited circuit.
3. UL ONLY -When these units are connected to a UL rated Class 2 circuit, they are not to draw a total wattage of greater than the secondary or output rating of the UL rated Class 2 power supply.
4. These products may be secured in place in the end product by any means available.
5. These products are suitable for use in dry, damp, and wet locations. Not suitable for submersed applications.

GLOBAL HQ

320 Murray Hill Pkwy
East Rutherford, NJ 07073
U.S.
T: (+1) 212 629 6830
E: Sales-US@GENLEDBrands.com

EUROPEAN HQ

Hogeweyselaan 119
1382 JK Weesp
Netherlands
T: (+31) 346 235 000
E: SalesEurope@GENLEDBrands.com

MEINA HQ

PO Box 371378, #823, Building 4EA
Dubai Airport Free Zone
Dubai, UAE
T: (+971) 4 701 7901
E: SalesMEINA@genlebrands.com

ASIA-PACIFIC HQ

Room 402, Building D
ShenShi Tongchuang Science and Technology Park
No. 16 Hongyin Road
Xingqiang Community, Xinhu Street
Guangming District, Shenzhen, China 518107
Sales: (+86) 139 1836 3905
Office: (+86) 755 8529 0710
E: Sales-Pacific@GENLEDBrands.com