

### NEON APEX

Neon Apex is a flexible LED neon designed for unique applications that require a top-bending light surface. Featuring a pliable silicone lens, Neon Apex is a great solution for lighting above or below an arch or wrapping around other unique molded shapes. With Static White, Variable White, RGBW and even Pixel RGBW options, Neon Apex marries the classic gleam of neon with all the benefits of modern LEDs.

- Top-bending design, just like our RibbonLyte
- RGBW, Static White, Variable White, Warm Dim at 4.5 W/ft (14.8 W/m)
- Pixel RGBW at 5.3 W/ft (17.4 W/m)
- Waterproof and UV resistant
- Salt water resistant
- Compact square design creates signature style




### ORDERING GUIDE

Category	Wattage & Color		Power Feed Direction
<b>NLA</b>			
NLA - Neon Apex	4.522 - 4.5 W/ft (14.8 W/m) 2200K	4.5RGB27 - 4.5 W/ft (14.8 W/m) RGB+White (2700K)	E - End Feed
	4.524 - 4.5 W/ft (14.8 W/m) 2400K	4.5RGB30 - 4.5 W/ft (14.8 W/m) RGB+W (3000K)	B - Bottom Feed
	4.527 - 4.5 W/ft (14.8 W/m) 2700K	4.5RGB40 - 4.5 W/ft (14.8 W/m) RGB+W (4000K)	S - Side Feed
	4.530 - 4.5 W/ft (14.8 W/m) 3000K	4.5VW - 4.5 W/ft (14.8 W/m) Variable White (2400K-6000K)	
<b>Mounting</b>	4.535 - 4.5 W/ft (14.8 W/m) 3500K	4.5WD - 4.5 W/ft (14.8 W/m) Warm Dim (1800K-3000K)	
1. Mounting Clips	4.540 - 4.5 W/ft (14.8 W/m) 4000K	5.3RGB30ADD - 5.3 W/ft (17.4 W/m) Pixel RGBW (3000K)	

Recommended for curved applications with 6 in. (150 mm) on center spacing (Part #: NLAMOUNTCLIPV2)

2. Mounting Channel  
Recommended for all straight run applications  
Sold by the foot, up to 6 ft 6 in. / 2 m  
(Part #: NLACHV2)

### AVAILABLE COLORS AND COLOR TEMPERATURES

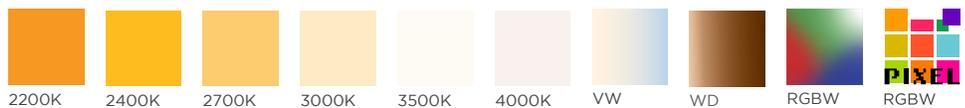

### USAGE GUIDELINES

- Neon Apex cannot be cut in the field. All custom cuts and connections for these models must be performed at the factory to ensure waterproofing standards are met. Any modification of the waterproofing will result in a void warranty.
- When installing this product, consider the surface temperature of the material where it will be mounted. Many building surfaces which are exposed to direct sunlight exceed the 140 °F (60 °C) maximum for which this product is rated. High-risk locations like this should be avoided.
- This product can be used in wet, outdoor locations, but is not intended to be submerged in pools and fountains and does not carry UL 676 certification for submersion.
- Compatible with a wide variety of controls.
- For use with Acolyte drivers, Triac dimming modules, and 0-10 V modules.
- Use with non-Acolyte Triac, MLV or ELV drivers is not supported or warrantied.
- Due to the cuttable points inside, this product's cuttable lengths are generally longer or shorter than the customer requested length. Unless specified, this product is factory cut at the shorter cuttable point.

Acolyte does not warrant or represent that this information is free from errors or omission. We reserve the right to make changes to our product lineup, specifications, design and finishes at any time without notice. Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.



POWER FEED OPTIONS / SPECIFICATIONS / USAGE GUIDELINES

SPECIFICATIONS	NEON APEX
Operating Voltage	24 VDC
Power Consumption	Static White, Variable White, Warm Dim, RGBW: 4.5 W/ft (14.8 W/m) / Pixel RGBW: 5.3 W/ft (17.4 W/m)
Protection Rating	IP67
Beam Angle	110°
Dimming	ELV / MLV / 0-10 Volt / DMX
Operating Temperature	-4 – 140 °F (-20 – 60 °C)
Color Temperatures / Colors	2200K, 2400K, 2700K, 3000K, 3500K, 4000K, Variable White (2400K-6000K), Warm Dim (1800K-3000K), RGBW (2700K, 3000K, 4000K), Pixel RGBW (3000K)
Lifetime	50,000 hours
Max Length	Static White: 39 ft 4.4 in. (12 m) / Variable White, Warm Dim, RGBW, Pixel RGBW: 16 ft 4.85 in. (5 m)
Incremental Length	Static White, Variable White, Warm Dim: 1.97 in. (50 mm) / RGBW: 3.28 in. (83.33 mm) / Pixel RGBW: 3.94 in. (100 mm) <b>NOT FIELD CUTTABLE</b>
Power Cable Length	Standard: 12 in (304.8 mm) / Custom: up to 20 ft (6 m)
UV Resistant	UV tested in accordance with ISO 4892-3 with no visible change on the appearance of the sample
Minimum Bend Radius	4.72 in. (120 mm)
CRI (white)	90+ for all Color Temperatures
DMX Type (Addressable / Pixel)	DMX IC UCS512H4LB.
Lumens	<p><b>Static White</b></p> <p>2200K: 360.9 lm/ft (1184 lm/m), 77 lm/W / 2400K: 404.8 lm/ft (1328 lm/m), 86 lm/W                  2700K: 415.7 lm/ft (1364 lm/m), 89 lm/W / 3000K: 430.4 lm/ft (1412 lm/m), 92 lm/W                  3500K: 442 lm/ft (1450 lm/m), 94 lm/W / 4000K: 453.5 lm/ft (1488 lm/m), 97 lm/W</p>
	<p><b>Variable White</b></p> <p>All LEDs at 100%: 305.2 lm/ft (1001.3 lm/m), 70 lm/W</p>
	<p><b>Warm Dim</b></p> <p>All LEDs at 100%: 264.2 lm/ft (866.9 lm/m), 60 lm/W</p>
	<p><b>RGBW</b></p> <p>Red: 15.85 lm/ft (52 lm/m), 16.14 lm/W / Green: 55.49 lm/ft (182 lm/m), 52.95 lm/W / Blue: 12.8 lm/ft (42 lm/m), 12.53 lm/W                  White: 90.85 lm/ft (298 lm/m), 50.77 lm/W / All LEDs at 100%: 173.78 lm/ft (570 lm/m), 36.42 lm/W</p>
	<p><b>Pixel RGBW</b></p> <p>Red: 14 lm/ft (45.9 lm/m), 12 lm/W / Green: 40 lm/ft (131.2 lm/m), 36 lm/W / Blue: 9 lm/ft (29.5 lm/m), 9 lm/W                  White: 43 lm/ft (141 lm/m), 65 lm/W / All LEDs at 100%: 106 lm/ft (347.6 lm/m), 20 lm/W</p>






MOLDED END CAPS



Note: Fixtures less than 8 in. (203 mm) long will come with silicone end caps (A).

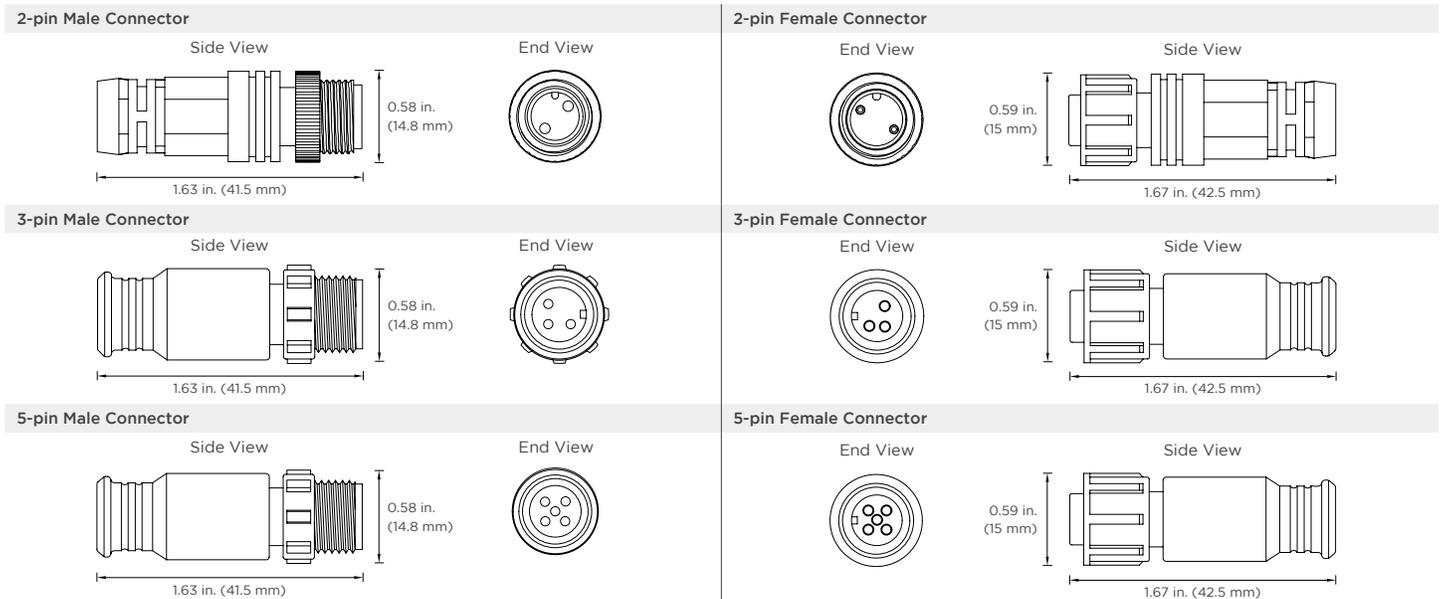


**DIMENSIONS / DIAGRAMS**

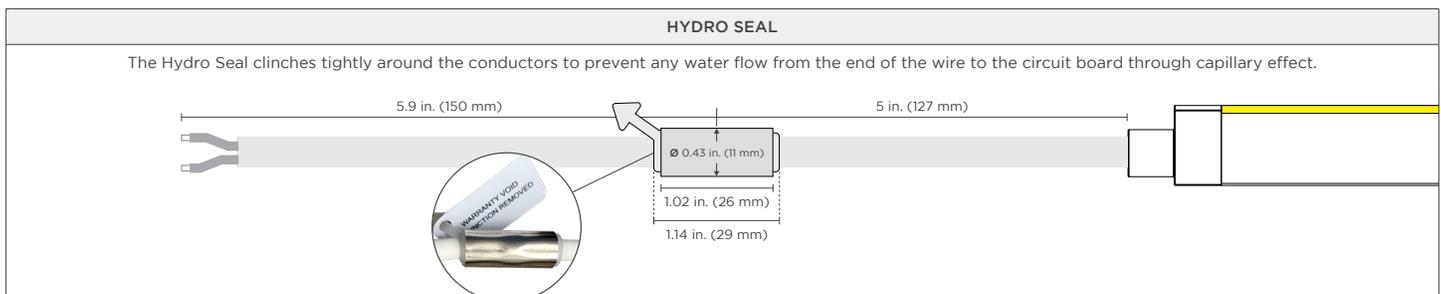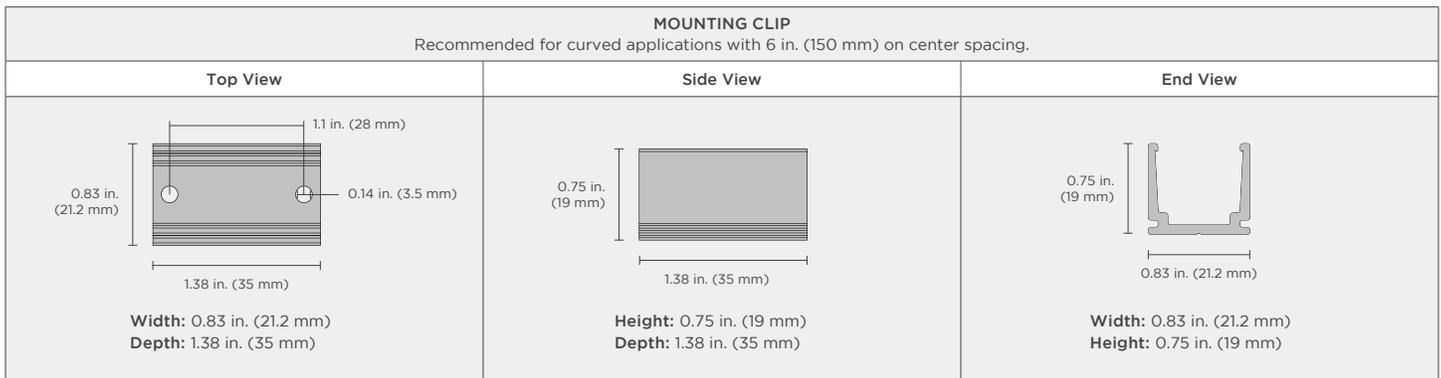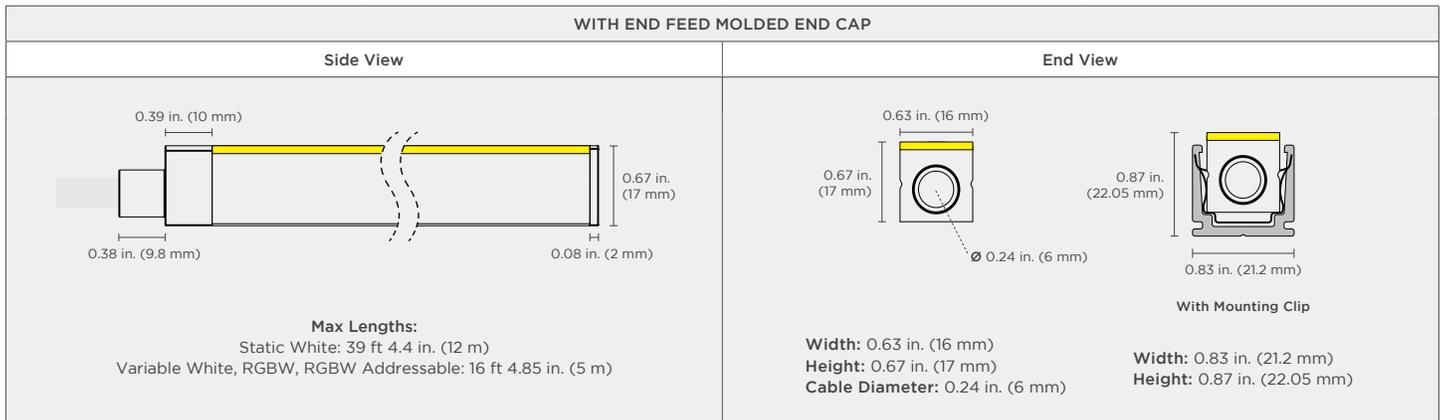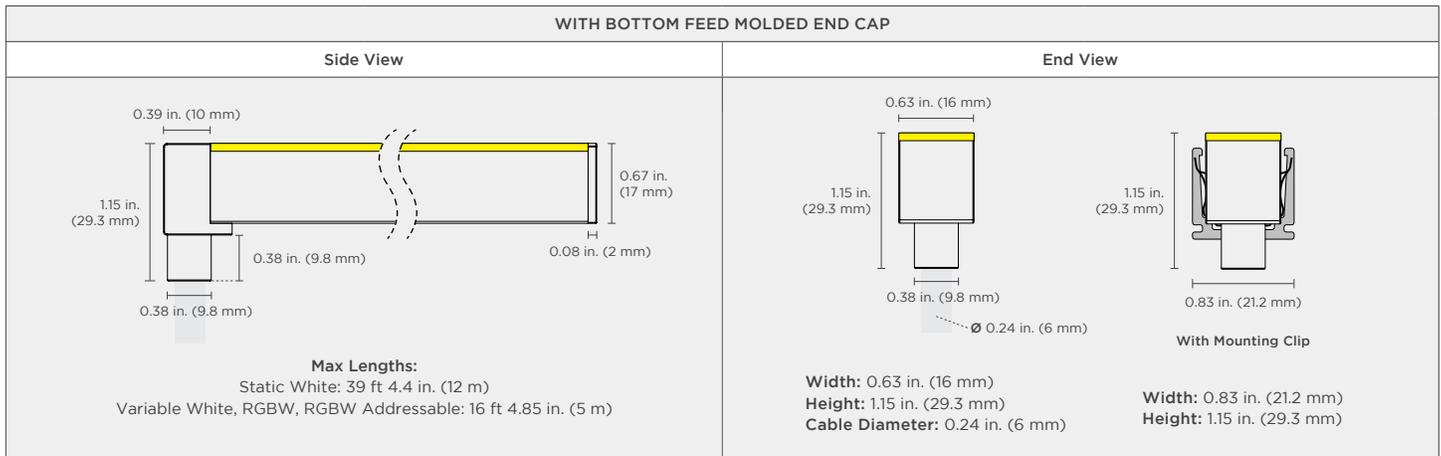


**WIRING DIAGRAMS - STATIC WHITE / RGBW**


**0-10V**

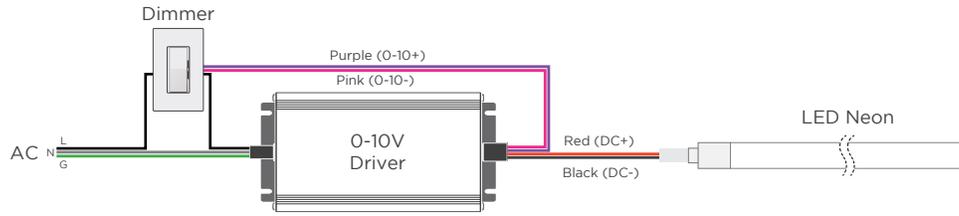


**MLV / ELV**

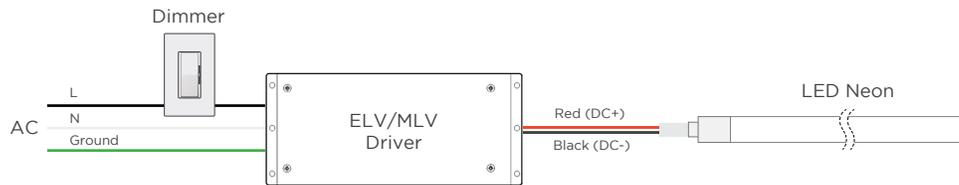


**DMX**

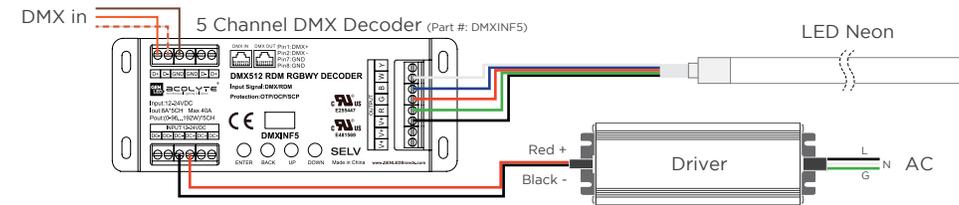

**DALI-2 WIRING WITH STATIC WHITE NEON APEX**

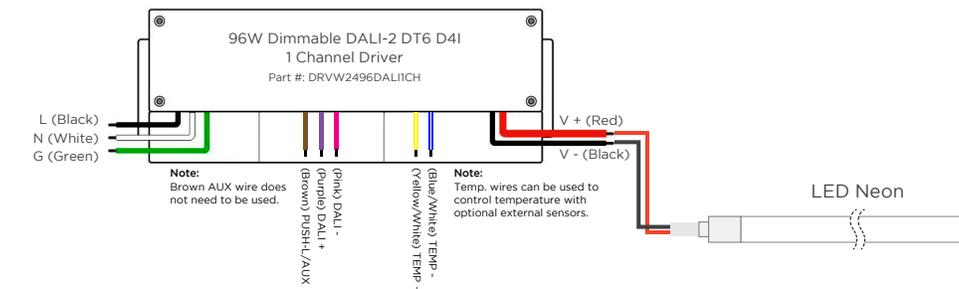

**STATIC WHITE NEON APEX WIRING WITH ATHENA WIRELESS COMPATIBLE DRIVER**

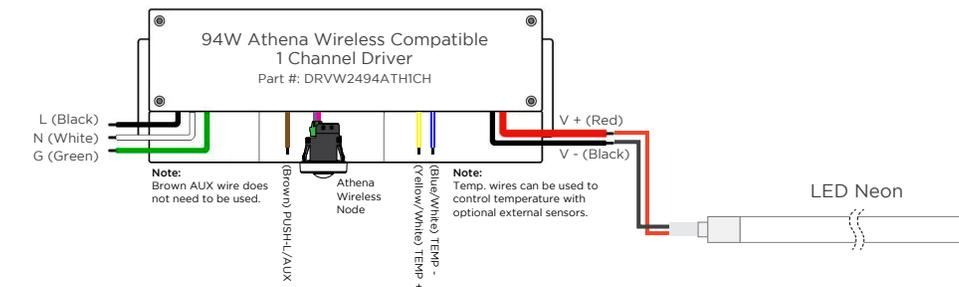


**WIRE COLORS**

**STATIC WHITE**  
Red Wire (+) Positive  
Black Wire (-) Negative

**RGBW**  
Black Wire (+) Positive  
Red Wire (-) goes to Red Channel  
Green Wire (-) goes to Green Channel  
Blue Wire (-) goes to Blue Channel  
White Wire (-) goes to White Channel

WIRING DIAGRAMS - VARIABLE WHITE / WARM DIM

2-CHANNEL VARIABLE WHITE & WARM DIM DIMMING

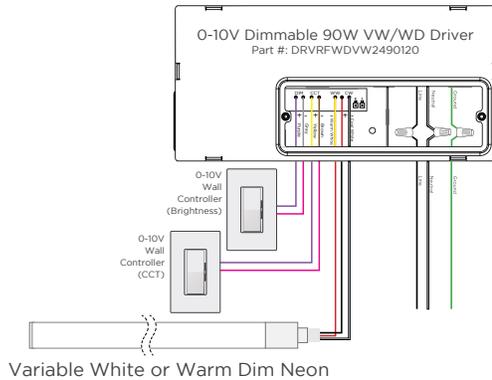


WIRE COLORS


**VARIABLE WHITE**  
Black Wire (+) Positive  
Red Wire (-) goes to Warm White Channel  
White Wire (-) goes to Cool White Channel

**WARM DIM**  
Black Wire (+) Positive  
Red Wire (-) goes to Warm White Channel  
White Wire (-) goes to Cool White Channel


DMX WIRING DIAGRAM - COMPATIBLE WITH VARIABLE WHITE & WARM DIM NEON

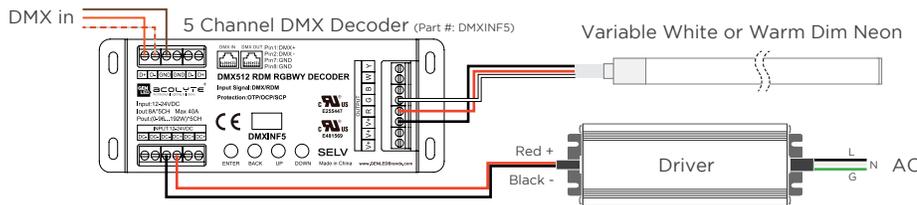

DALI-2 WIRING WITH VARIABLE WHITE & WARM DIM NEON

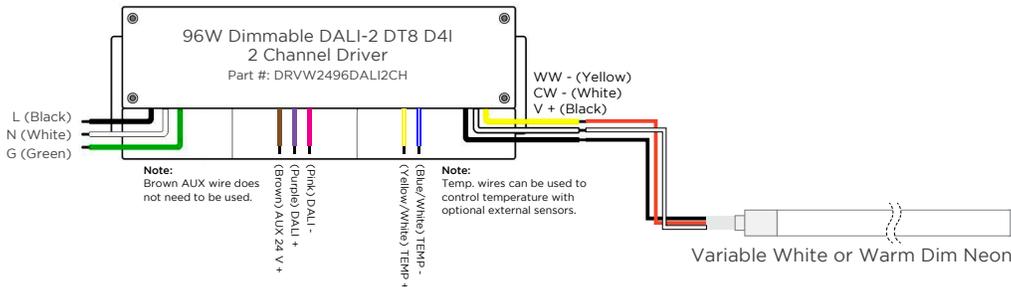

ATHENA WIRELESS COMPATIBLE DRIVER WIRING WITH VARIABLE WHITE & WARM DIM NEON

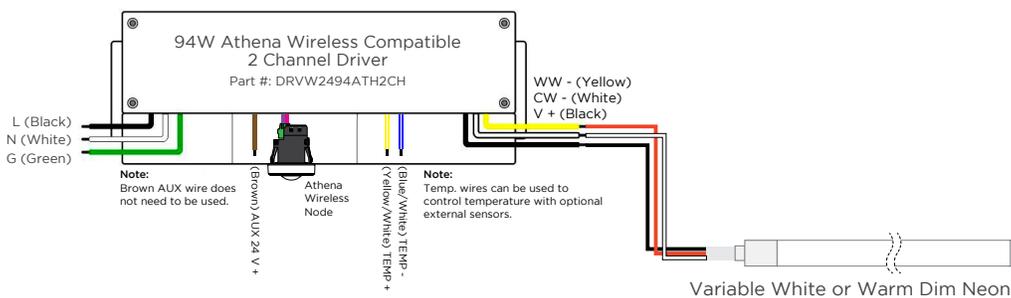


WIRING DIAGRAMS - RGBW ADDRESSABLE

One DMX Universe consists of 128 addresses and 512 channels (42 ft 8 in. of Neon Apex).

Any single run of Neon Apex that is less than 16 ft 4.85 in. (5 m) can be wired directly to the controller.

For additional runs, Opto Splitter must be used. Each individual run will need its own Opto Splitter output.

WIRE INDEX	
+	(24V +)
PI	(DMX GND)
A+	(DMX +)
B-	(DMX -)
GND	(24V -)

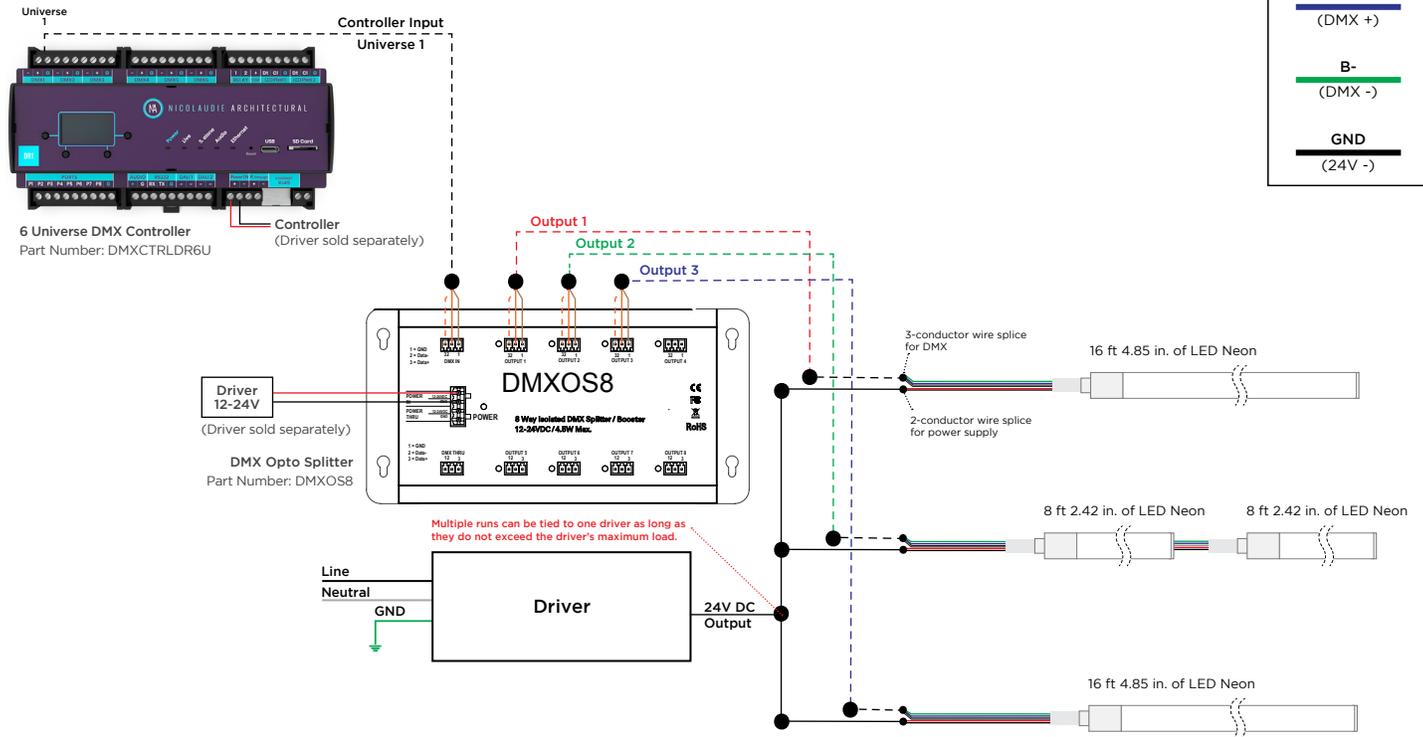

REV.26MAR2026

**GLOBAL HQ**

320 Murray Hill Pkwy  
East Rutherford, NJ 07073  
U.S.  
T: (+1) 212 629 6830  
E: Sales-US@GENLEDBrands.com

**EUROPEAN HQ**

Hogeweyselaan 119  
1382 JK Weesp  
Netherlands  
T: (+31) 346 235 000  
E: SalesEurope@GENLEDBrands.com

**MEINA HQ**

PO Box 371378, #823, Building 4EA  
Dubai Airport Free Zone  
Dubai, UAE  
T: (+971) 4 701 7901  
E: SalesMEINA@genledbrands.com

**ASIA-PACIFIC HQ**

Room 402, Building D  
Shenshi Tongchuang Science and Technology Park  
No. 16 Hongyin Road  
Xingqiang Community, Xinhua Street  
Guangming District, Shenzhen, China 518107  
T: (+86) 755 8529 0710  
E: Sales-Pacific@GENLEDBrands.com