
LED NEON







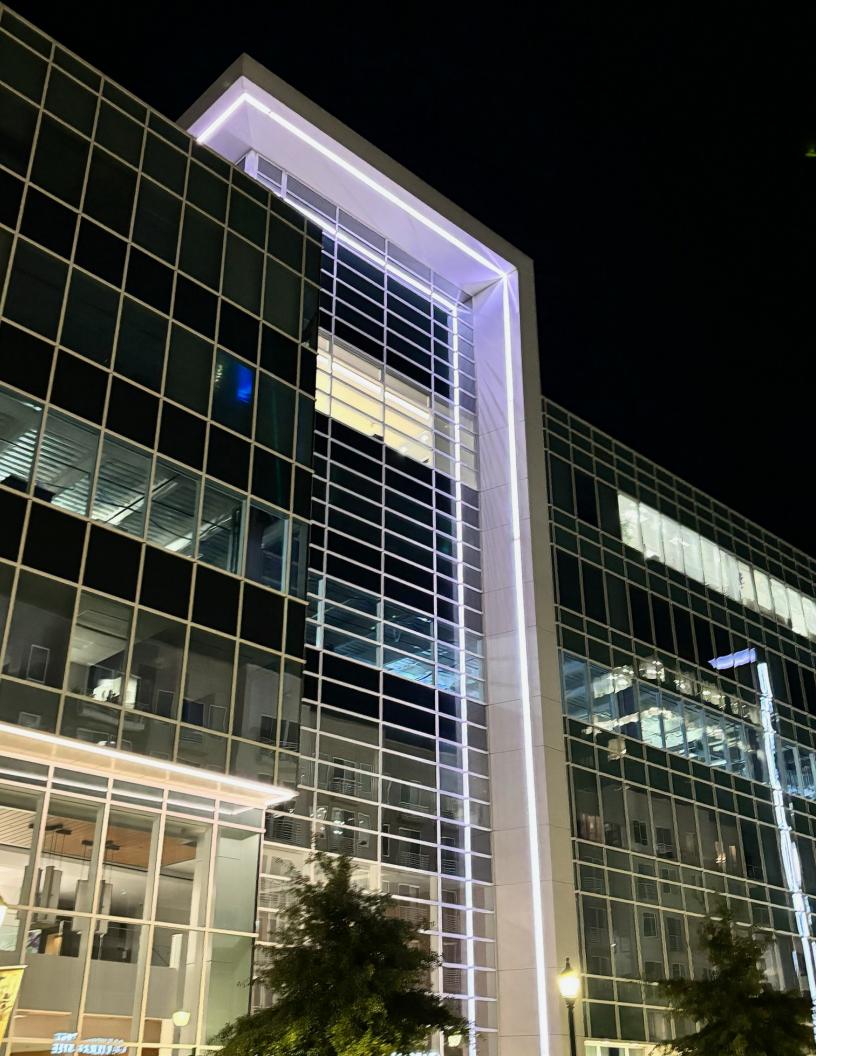

INDEX

INTRODUCTION

Like Neon, But Better!

PRODUCTS

Neon Silhouette & Neon Silhouette Plus Neon Contour & Neon Contour Plus	6 8
Neon360	12

MOUNTING ACCESSORIES

Mounting Clip, Mounting Channel, Hydro Seal 14

CONNECT

Contact Us 18

Cover Photos

UBS Arena | Elmont, New York, USA Neon Contour Plus | Static White (5000K) & Static Color (Red)

Left Page

Summit Pointe | Chesapeake, Virginia, USA LED Neon

Photographer: Hendue Vidal



LIKE NEON, BUT BETTER!

Marry the classic gleam of neon with all the benefits of modern LEDs. Our 24V neon replacement products feature flexible silicone lenses that protect our premium RibbonLyte while diffusing the LEDs to create the look of neon. Use our waterproof LED neon products for lettering, façade lighting and highlighting architectural details. Design custom fixtures in an array of amazing shapes and create unique lighting solutions for any space.

LED SELECTION

Because we manufacture our LEDs in our own factories, we can closely monitor the entire quality control process, from selection of the best raw materials to precise photometrics testing of every finished product. With superior efficacy and longevity, premium products like these provide big long-term savings in energy, maintenance and replacement costs.

CUSTOM COLORS!

We offer a variety of Static White CCTs and Variable White in our LED neon products but we also manufacture RGB, RGBW and RGBW Addressable options that allow you to change colors like no neon tubes you've ever seen! Tune your neon to your distinct color choice or use DMX controls to alter colors as you see fit.



Right: Neon Apex

NEON SILHOUETTE (CE ROHS IP67 ASSESSED






Neon Silhouette offers a smooth, flat lens that creates vivid fine lines of light for highlighting architectural details.

- Create fine neon lines
- Side-bending turn radius
- Min. bend radius 2.36 in. (60 mm)
- 3.0 W/ft (9.8 W/m) Static White (2400K-4000K)
- 3.0 W/ft (9.8 W/m) Variable White (2400-6000)
- 3.0 W/ft (9.8 W/m) Color changing RGB

drawings show the bottom power feed with molded end caps. See spec sheet for end power feed. Neon Silhouette RGB models use larger silicone end caps

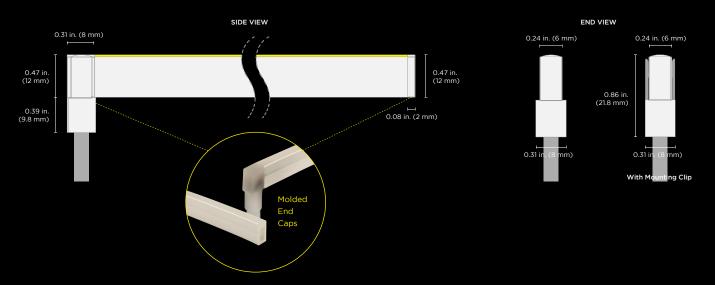

NEON SILHOUETTE PLUS (6 ROHS IP67 ASSESSED









Neon Silhouette Plus offers a smooth, flat lens that creates larger vivid lines of light for highlighting architectural details.

- Create fine neon lines
- Side-bending turn radius
- Min. bend radius 4.72 in. (120 mm)
- 4.5 W/ft (14.76 W/m) Static White (2400K-4000K)
- 4.5 W/ft (14.76 W/m) Variable White (2700K-5400K)
- 4.5 W/ft (14.76 W/m) Color changing RGBW
- 5.3 W/ft (17.4 W/m) RGBW Addressable

on drawings show the bottom power feed with molded end caps. See spec sheet for end power feed.

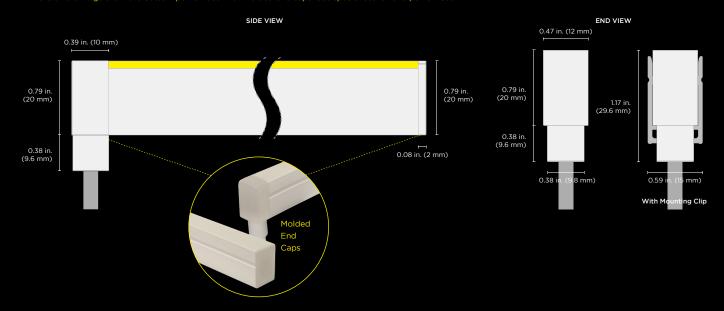

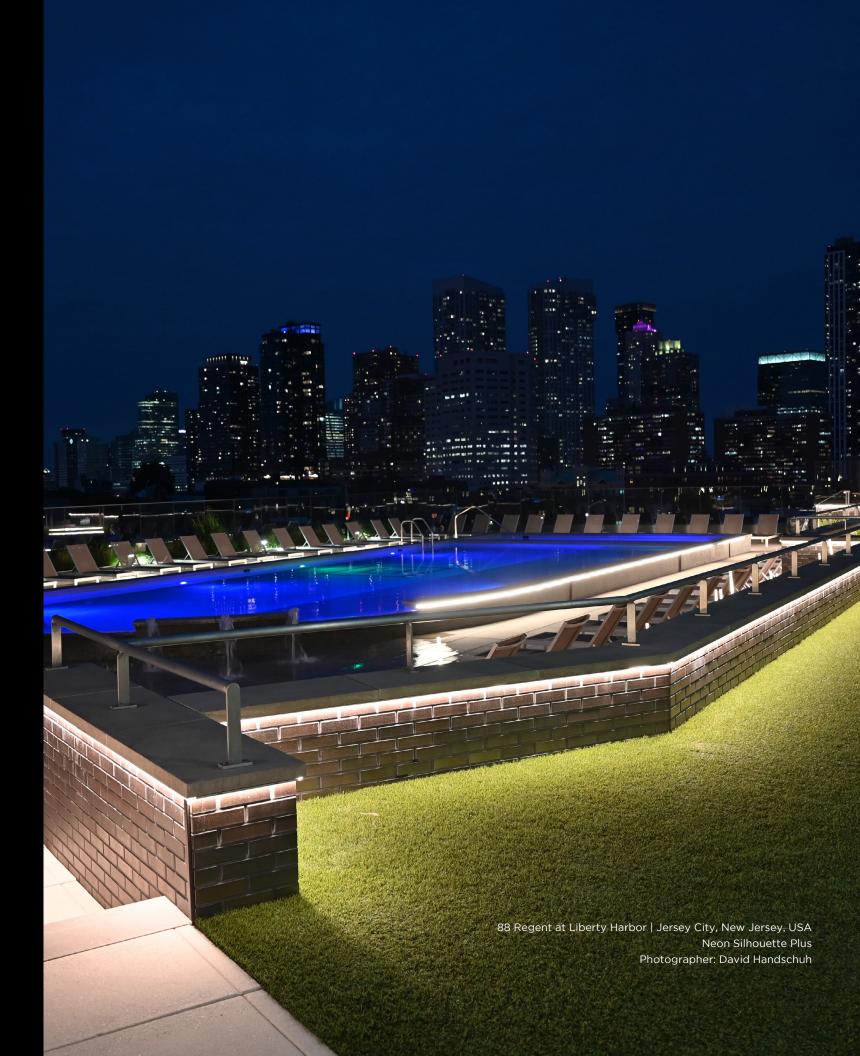


NEON CONTOUR

() CE ROHS IP67 M66



Neon Contour offers a rounded lens that creates a classic glowing tube-shaped light fixture that is great for lettering or architectural design with a retro feel.

- Create glowing tubes of light
- Side-bending turn radius
- Min. bend radius 3.94 in. (100 mm)
- 3.0 W/ft (9.8 W/m) Static White (2400K-4000K)
- 3.0 W/ft (9.8 W/m) Variable White (2400-6000)
- 3.0 W/ft (9.8 W/m) Color changing RGB

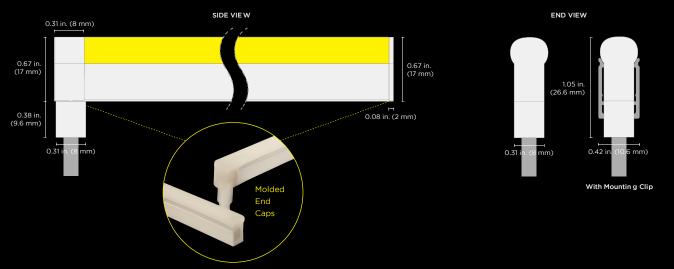


NEON CONTOUR PLUS





Neon Contour Plus offers a rounded lens that creates a larger classic tube-shaped light fixture.

- Create larger glowing tubes of light
- Side-bending turn radius
- Min. bend radius 5.9 in. (150 mm)
- 4.5 W/ft (14.76 W/m) Static White (2400K-4000K)
- 4.5 W/ft (14.76 W/m) Variable White (2700K-5400K)
- 4.5 W/ft (14.76 W/m) Color changing RGBW

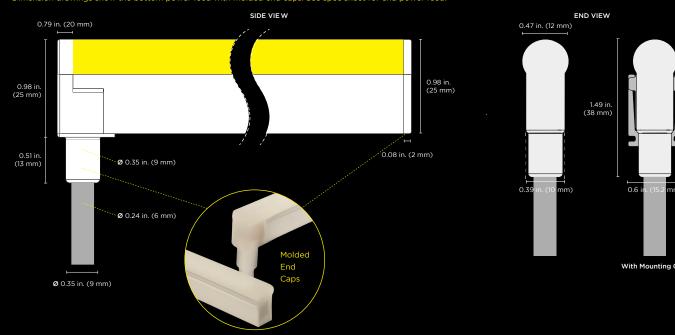







The Neon Apex is a square flexible top-bend neon replacement product designed for unique applications such as convex or concave curves like arches or rounded frames.

- Create bold, gleaming lines of light
- Top-bending design
- 4.5 W/ft (14.76 W/m) Static White (2400K-4000K)

• 4.5 W/ft (14.76 W/m) Variable White (2700K-5400K) • 4.5 W/ft (14.76 W/m) Color changing RGBW • 5.3 W/ft (17.4 W/m) RGBW Addressable • Min. bend radius 4.72 in. (120 mm) Dimension drawings show the bottom power feed with molded end caps. See spec sheet for end power feed. SIDE VIEW END VIEW 0.63 in. (16 mm) 1.15 in. (29.3 mm) — 0.08 in. (2 mm



() (E RoHS IKO8 IP65 LM80





Neon360 is a bendable Static White LED neon tube with a round profile that provides uniform light distribution. Neon360 can be hung vertically, horizontally, or draped and shaped for custom installations.

- Fully illuminated flexible round LED neon
- Choose from several unique mounting options
- 4.8 W/ft (16 W/m)
- Static White (2400K-4000K)
- Min. bending radius: 2.36 in. (60 mm)
- 0.91 in. (23 mm) diameter
- 1.4 in. (35.71 mm) cut lengths



END FEED

Width: 0.91 in. (23 mm) Height: 0.91 in. (23 mm) Length: Up to 16 ft 4. in. (5 m)



SIDE FEED Width: 0.91 in. (23 mm) Height: 1.46 in. (37 mm) Length: Up to 16 ft 4. in. (5 m)

ACCESSORIES




















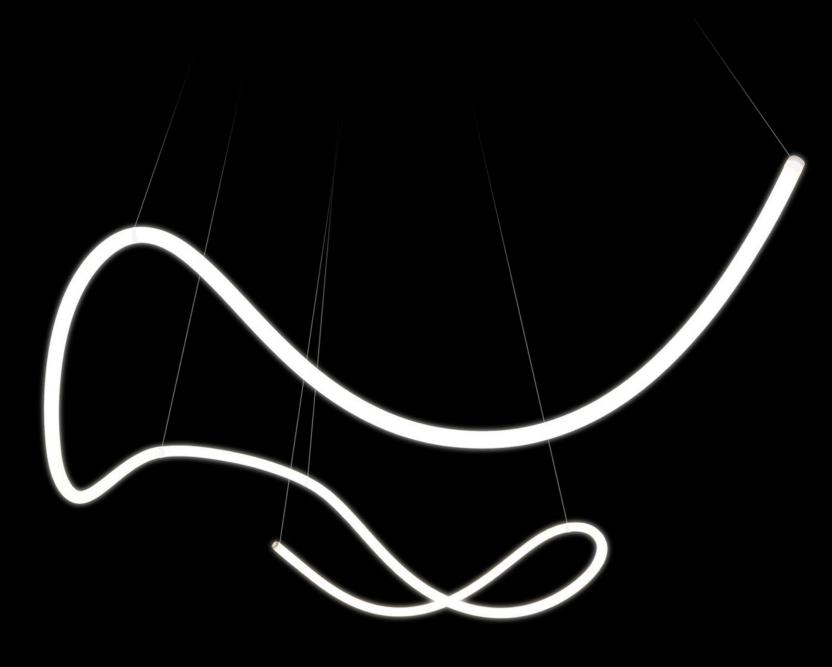

MOUNTING ACCESSORIES

Our LED neon products are flexible by design to allow for creative shapes, lettering and sinuous architectural lines. For curved applications, please use our Aluminum Mounting Clips. For straight lines or rigid applications, be sure to use our Aluminum Mounting Channel.

ALUMINUM MOUNTING CLIPS

Each product comes with its own specifically sized Aluminum Mounting Clips for a snug fit. Use the mounting clips at key stress points to create lettering or artistic curved applications.



ALUMINUM MOUNTING CHANNEL

Use Aluminum Mounting Channel for rigid applications. Special order Aluminum Mounting Channel by the foot, up to 6 ft. 6 in. (1981 mm) per piece. Each applicable channel matches the height and width of the product-appropriate mounting clip.



HYDRO SEAL

The Hydro Seal clinches tightly around the conductors to prevent any water flow from the end of the wire to the circuit board through capillary effect. Please account for the width of the Hydro Seal when drilling for power feed access. Removal of the Hydro Seal will void any warranty.







CONTACTUS

CALL US. EMAIL US. WRITE US A LETTER. CONNECT WITH US ON SOCIAL MEDIA.



PRICING & SALES SUPPORT

T: (+1) 212 629 6830, ext. 300 E: SalesSupport@GENLEDBrands.com



TECHNICAL SUPPORT

T: (+1) 212 629 6830, ext. 301 E: Tech@GENLEDBrands.com



CUSTOMER SERVICE

T: (+1) 212 629 6830, ext. 304 E: CustomerService@GENLEDBrands.com



linkedin.com/company/genledacolyte



facebook.com/acolyteled



instagram.com/acolyte_led

See our product videos in the Media section at AcolyteLED.com



GLOBAL HQ & AMERICAN SALES

U.S., Canada, Central and South America

320 Murray Hill Pkwy East Rutherford, NJ 07073 T: (+1) 212 629 6830

E: Sales-US@GENLEDBrands.com

MEINA SALES HQ

Middle East, India, Africa

PO Box 371378, #823, Building 4EA Dubai Airport Free Zone, Dubai, UAE T: (+971) 4 701 7901

E: SalesMEINA@genledbrands.com

CONNECT WITH US

Stay informed about our industry-leading product and service updates, recent installations and more!

www.GENLEDBrands.com AcolyteLED.com AgiLight.com

EUROPEAN SALES HQ

With offices in Netherlands, UK, Italy, Germany

De Corridor 16L en 16K 3621ZB Breukelen Netherlands T: (+31) 346 235 000

E: SalesEurope@GENLEDBrands.com

ASIA-PACIFIC SALES HQ

With offices in Shenzhen, Shanghai, Singapore, Australia

Room 402, Building D Shenshi Tongchuang Science and Technology Park No. 16 Hongyin Road

Xingqiang Community, Xinhu Street Guangming District, Shenzhen, China 518107

Sales: (+86) 139 1836 3905 Office: (+86) 755 8529 0710

E: Sales-Pacific@GENLEDBrands.com



Above: Sphere | Las Vegas, NV, USA Lighting Designer: iCRAVE Neon Apex

© 2024 GENLED Brands™. All rights reserved. Some designs and technologies in the catalog are covered by U.S. Patents.

