

Rapid Channel by Acolyte



WORK WITH THE SPEED OF LIGHT


RAPID S2 CHANNEL FIXTURE

Our Rapid S2 Channel Fixture is a slim surface mounted channel with a narrow 66-degree beam angle for a focused spread of light. This channel is great for more compact applications such as tight coves. The Rapid S2 offers a choice of frosted or milky lens. Design a stunning custom fixture with Rapid S2 Channel Fixture and any of our Rapid Ribbon 95+ by Acolyte products. It ships in 48 hours or less!

- 66° beam angle
- Frosted or Milky lens
- Slim surface mounted design

Applications:

Commercial Entertainment Hospitality Museums Residential Retail Healthcare Public Spaces

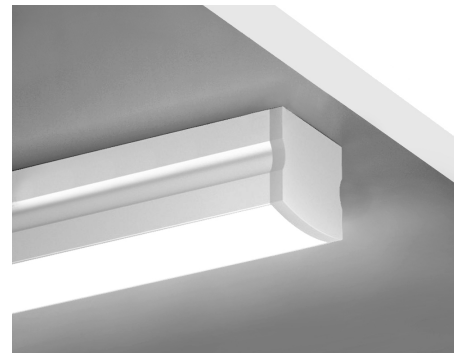

LENS FINISHES

Frosted Lens
85% Light Transmission

Milky Lens
70% Light Transmission




RoHS

SPECIFICATIONS


Beam Angle	66°	DIMENSIONS	
Lens Type	Frosted, Milky	Channel (W x H x Internal Width)	0.7 in. x 0.6 in. x 0.49 in. (17.78 mm x 15.2 mm x 12.45 mm)
Operating Voltage	24V	Channel with Mounting (W x H)	0.7 in. x 0.65 in. (18.2 mm x 16.5 mm)

RAPID S2 CHANNEL




MOUNTING CLIP


Side View



Top View




CHANNEL WITH MOUNTING CLIP



ORDERING GUIDE

CATEGORY	LENS	Included Accessories: Mounting Clip x 3 End Cap x 2 End Cap with Hole x 2
CHS2		
CHS2 - Rapid S2 Channel	F - Frosted M - Milky	

AVAILABLE COLOR TEMPERATURES



REV.19MAY2021