
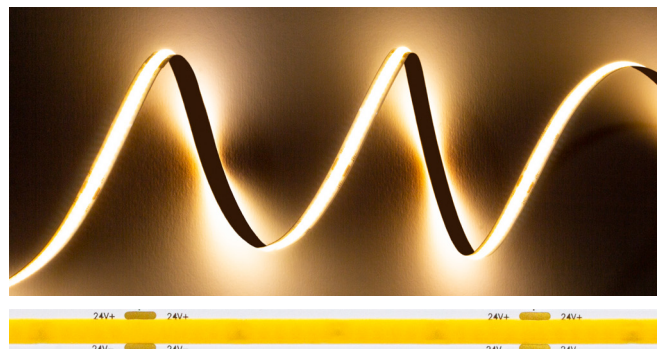


2.4 STATIC WHITE LINEA RIBBONLYTE

Static White Linea RibbonLyte features a “chip on board” design and a special raised coating that allows for diode-free light even without a diffuser lens. A tight pitch of 12 LED chips per inch ensures that either in direct view or in a complete channel fixture, high-CRI Static White Linea RibbonLyte won't show individual diodes in any of four dimmable CCTs ranging from 2700K to 4000K.

- 2700K, 3000K, 3500K, 4000K
- 1.97 in. (50 mm) cut length
- 67-83 lm/W
- 90+ CRI
- IP67 models available upon request
- Closet rated in channel applications



RoHS

IP20

Declare.



ORDERING GUIDE

Category	CRI	Ribbon Type & IP Rating	Wattage & Color
RB	90	LINEA20	
RB - RIBBONLYTE	90 - 90+ CRI Static White	LINEA20 - Linea RibbonLyte IP20	2.427 - 2.4 W/ft (8 W/m) 2700K 2.430 - 2.4 W/ft (8 W/m) 3000K 2.435 - 2.4 W/ft (8 W/m) 3500K 2.440 - 2.4 W/ft (8 W/m) 4000K

CONNECTION OPTIONS

1. End Feed Bare Wire Connection (Default Option)



2. IP67 Connector Input




3. Soldered Daisy Chain



4. Daisy Chain with IP67 Connectors



5. Bare Wire on Both Ends



Standard cable length if not specified:

- 12 in. cable with bare wire (custom length up to 20 feet)
 - Standard 12 in. cable with IP67 connectors (custom length up to 10 feet)
 - Daisy chain with 3 in. cable between runs (custom length up to 36 in.)
 - 3 in. cable between IP67 connector and RibbonLyte (custom length up to 18 in.)
 - Standard 12 in. cable with bare wire (custom length up to 10 feet on both ends)
- Note: IP67 connectors are used for both IP20 and IP67 RibbonLyte

AVAILABLE COLOR TEMPERATURES



2700K



3000K




3500K



4000K

SPECIFICATIONS / DIAGRAM / USAGE GUIDELINES

2.4 STATIC WHITE LINEA RIBBONLYTE				
Operating Voltage	24V			
Power Consumption	2.4 W/ft (8 W/m)			
Current (mA) - 24V	100 mA/ft (328 mA/m)			
LED Pitch	146 LEDs/ft (480 LEDs/m)			
Protection Rating	IP20 (IP67 models available upon request)			
Dimming/Control	MLV / 0-10 Volt / ELV / DALI / CASAMBI			
Operating Temperature	-40 — 158 °F (-40 — 70 °C)			
Colors Temperatures	2700K	3000K	3500K	4000K
Lumens	161 lm/ft (528 lm/m)	170 lm/ft (559 lm/m)	199 lm/ft (654 lm/m)	199 lm/ft (654 lm/m)
LED Beam Angle	180°			
Minimum Bend Diameter	1.97 in. (50 mm)			
Cutable Length	1.97 in. (50 mm)			
CRI - All Color Temp.	90+ CRI			
Lumens/Watt	67 lm/W	71 lm/W	83 lm/W	83 lm/W
Certifications	UL 2108 Issued: 2016/06/17 Ed: 1 Rev: 2021/10/16 Low Voltage Lighting Systems. CSA C22.2 No. 250.0, General Requirements for Luminaires. RoHS compliant. All RibbonLyte models 3.0 W/ft (9.8 W/m) and lower when used in any Acolyte Channel profile except Piccolo are tested by UL and confirmed 'Suitable for Installation in the Storage Area of a Clothes Closet' in accordance with NFPA 70 and NEC 410.16 and 411.			
Warranty	3 years			

DIMENSIONS	Top View	Side View	Dimensions
IP20	 CUTTABLE EVERY: 1.97 in (50 mm)		Width 0.24 in. (6 mm) Max Length 21.3 ft (6.5 m) Height 0.09 in. (2.2 mm)

OPTIONAL ACCESSORY

0.5 in. VHB Tape	Flat Mounting Clip
 Provides superior holding power in surface mounted applications Part Number: VHBTAPE0.5BK	 For mounting IP20 RibbonLyte Part Number: RBMNTSIL

Note: RibbonLyte comes with an adhesive backing, but Acolyte recommends using VHB Tape for extra support in surface mounted applications.




USAGE GUIDELINES

- IP65 and IP68 RibbonLyte cannot be cut in the field. All custom cuts and connections for these models must be performed at the factory to ensure waterproofing standards are met. Any modification of the waterproofing will result in a void warranty.
- When installing this product, consider the surface temperature of the material where it will be mounted. Many building surfaces which are exposed to direct sunlight exceed the 70 °C / 158 °F maximum for which our product is rated. High-risk locations like this should be avoided.
- IP20 RibbonLyte products are for indoor use in dry areas. IP65 RibbonLyte products can be used in indoor dry/damp locations such as bathrooms and kitchens. IP68 RibbonLyte products can be used in wet, outdoor locations around pools and spa tubs, but our products are not intended to be submerged in pools and fountains and do not carry UL676 certification to do so.
- Please refer to the RibbonLyte Proper Usage Guide in our Application Guide for more information. Available for download at AcolyteLED.com.
- This product is compatible with a wide variety of control products including the entire line of Lutron dimming systems.
- For use with Acolyte drivers, 0-10V dimming modules and interface controllers (DMXINF models).
- Use with non-Acolyte supplied drivers is not supported or warrantied.
- Due to the nature of RibbonLyte products, cuttable lengths are generally longer or shorter than the customer requested length. Unless specified, RibbonLyte is factory cut at the shorter cuttable point.
- We reserve the right to make changes to product lineup, specifications, design and finishes at any time without notice.

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.



CHANNEL COMPATIBILITY / CHANNEL OPTIONS

CHANNEL	IP20	SURFACE MOUNTED						
AC1	✓							
AC2	✓							
AC3	✓							
AC5	✓							
AC15L	✓							
AR1	✓							
AR3	✓							
AR15L	✓							
AR15AL	✓							
AR24R	✓							
AR29L	✓							
AS1	✓							
AS1GS	✓							
AS2	✓							
AS3	✓							
AS5	✓							
AS10	✓							
AS13	✓							
AS15L	✓							
AS16	✓							
AS20G	✓							
AS20GS	✓							
AS21	✓							
AS22L	✓							
AS23	✓							
AS24R	✓							
AS29L	✓							
AS30	✓							
AS31	✓							
AS35L	✓							
AS53	✓							
AT4	✓							
AT5	✓							
B1	✓							
SC3	✓							
SC10	✓							
SC15L	✓							
SC20C	✓							
SC23	✓							
SC24R	✓							
SC38C	✓							

SURFACE MOUNTED								
								
AS1	AS1GS	AS2	AS3	AS10	AS13 / round lens	AS13 / square lens	AS15L	
W: 0.68 in. / 17.2 mm H: 0.34 in. / 8.6 mm	W: 0.67 in. / 17.1 mm H: 0.55 in. / 13.9 mm	W: 0.7 in. / 17.8 mm H: 0.6 in. / 15.2 mm	W: 0.93 in. / 23.6 mm H: 0.42 in. / 10.7 mm	W: 0.47 in. / 12 mm H: 0.47 in. / 12 mm	W: 1.31 in. / 33.4 mm H: 1.29 in. / 32.7 mm	W: 1.31 in. / 33.4 mm H: 1.37 in. / 34.8 mm	W: 0.59 in. / 15 mm H: 0.59 in. / 15 mm	
								
AS16	AS20G	AS20GS	AS21	AS22	AS23	AS24R	AS29L	
W: 0.74 in. / 18.8 mm H: 0.73 in. / 18.6 mm	W: 0.61 in. / 15.5 mm H: 0.71 in. / 18 mm	W: 1.11 in. / 28.3 mm H: 1.57 in. / 40 mm	W: 0.79 in. / 20 mm H: 0.82 in. / 20.84 mm	W: 0.87 in. / 22 mm H: 0.93 in. / 24.5 mm	W: 0.91 in. / 23 mm H: 1.59 in. / 40.5 mm	W: 0.91 in. / 23 mm H: 1.03 in. / 26.2 mm	W: 1.18 in. / 30 mm H: 1.15 in. / 29.2 mm	
								
AS30 / round lens	AS30 / square lens	AS31	AS35L	AT4	AT5	B1		
W: 1.31 in. / 33.4 mm H: 1.95 in. / 49.5 mm	W: 1.31 in. / 33.4 mm H: 2.03 in. / 51.6 mm	W: 1.18 in. / 30 mm H: 1.22 in. / 30.92 mm	W: 1.38 in. / 35 mm H: 1.48 in. / 37.5 mm	W: 0.77 in. / 19.6 mm H: 0.74 in. / 18.8 mm	W: 0.77 in. / 19.6 mm H: 0.74 in. / 18.8 mm	W: 0.77 in. / 19.6 mm H: 0.26 in. / 6.5 mm		


CORNER					
					
AC1	AC2	AC3	AC5	AC15L	
W: 0.63 in. / 16 mm H: 0.63 in. / 16 mm	W: 0.63 in. / 16 mm H: 0.63 in. / 16 mm	W: 0.74 in. / 18.8 mm H: 0.74 in. / 18.8 mm	W: 1.18 in. / 30 mm H: 1.18 in. / 30 mm	W: 0.63 in. / 16 mm H: 0.63 in. / 16 mm	

RECESSED						
						
AR1	AR3	AR15L	AR15AL	AR24R	AR29L	
W: 0.9 in. / 22.9 mm H: 0.31 in. / 7.87 mm	W: 1.2 in. / 30.5 mm H: 0.42 in. / 10.8 mm	W: 0.59 in. / 15 mm H: 0.53 in. / 13.5 mm	W: 1.31 in. / 33.3 mm H: 0.6 in. / 15.3 mm	W: 1.3 in. / 33 mm H: 1.03 in. / 26.2 mm	W: 1.57 in. / 40 mm H: 1.15 in. / 29.2 mm	


MUD-IN						
						
SC3	SC10	SC20C	SC24R	SC15L	SC23	SC38C
W: 2.62 in. / 66.6 mm H: 0.55 in. / 14 mm	W: 1.41 in. / 35.9 mm H: 0.56 in. / 14.1 mm	W: 1.66 in. / 42.2 mm H: 1.89 in. / 48.1 mm	W: 2.48 in. / 63 mm H: 1.03 in. / 26.2 mm	W: 2.17 in. / 55 mm H: 0.39 in. / 9.8 mm	W: 0.93 in. / 23.7 mm H: 3.46 in. / 88 mm	W: 2.32 in. / 58.9 mm H: 2.85 in. / 72.3 mm

WIRING DIAGRAMS


0-10V

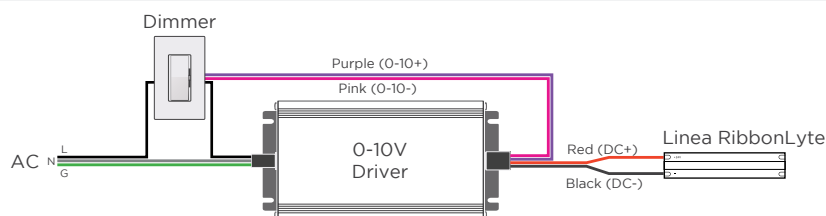

MLV / ELV

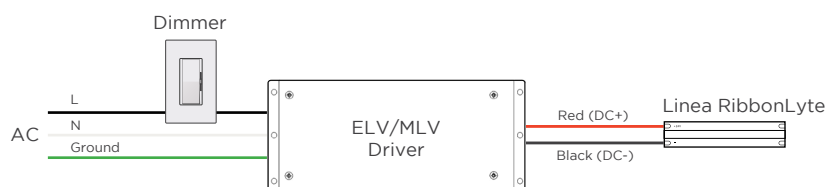

DMX

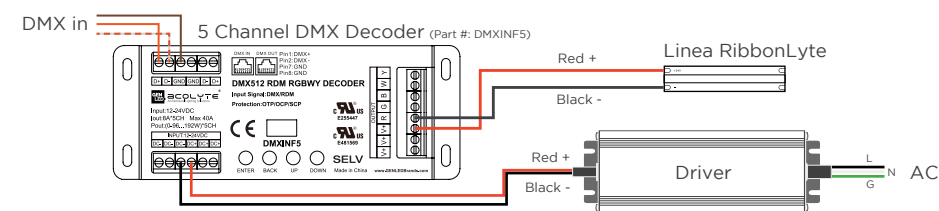

WIRE COLORS PER RIBBONLYTE COLOR

STATIC WHITE
Red Wire (+) Positive
Black Wire (-) Negative

ACTUAL POWER CONSUMPTION

Length (ft)	Length (m)	Actual Power Consumed (W)	Average Wattage (W/ft)	Average Wattage (W/m)	Actual Current Drawn (A)
5	1.52	11.78	2.36	7.73	0.491
10	3.05	23.39	2.34	7.67	0.975
15	4.57	34.64	2.31	7.57	1.443
20	6.10	45.36	2.27	7.44	1.890
21.3	6.49	48.43	2.27	7.46	2.018

NOTE: Quotes use nominal values. We highly recommend using nominal wattages for all customer calculations. Allow for a 15% buffer (10% driver, 5% fixture) in these calculations as performance may vary. Acolyte is not liable for product performance if these tables are used instead of nominal values when orders are placed.

REV.09JUN2026

GLOBAL HQ

320 Murray Hill Pkwy
East Rutherford, NJ 07073
U.S.
T: (+1) 212 629 6830
E: Sales-US@GENLEDBrands.com

EUROPEAN HQ

Hogeweyselaan 119
1382 JK Weesp
Netherlands
T: (+31) 346 235 000
E: SalesEurope@GENLEDBrands.com

MEINA HQ

PO Box 371378, #823, Building 4EA
Dubai Airport Free Zone
Dubai, UAE
T: (+971) 4 701 7901
E: SalesMEINA@genledbrands.com

ASIA-PACIFIC HQ

Room 402, Building D
Shenshi Tongchuang Science and Technology Park
No. 16 Hongyin Road
Xingqiang Community, Xinhua Street
Guangming District, Shenzhen, China 518107
T: (+86) 755 8529 0710
E: Sales-Pacific@GENLEDBrands.com