



Date \_\_\_\_\_ Project \_\_\_\_\_

Notes \_\_\_\_\_

**ELV/MLV DIMMABLE DRIVERS**


High-efficiency universal constant voltage driver for flicker-free dimming, compatible with forward and reverse phase dimmers.

- 24V DC, 100-277V AC
- 60W, 96W, 150W, 300W available
- Dimming range: 1%-100%
- IP67, dry and damp location rated
- Overload, short circuit protection
- Class 2 output (60W, 96W)
- Black powder coated steel case
- UL Listed in U.S. and Canada. Your city may require a UL Listed or UL Recognized component, both of which this product satisfies.
- 7-year warranty



**Applications:**

Commercial      Hospitality      Residential  
Entertainment   Museums      Retail  
Healthcare      Public Spaces



**ORDERING GUIDE**

Category	Waterproof	Wattage
DRV	W	
DRV - 24 V Driver	W - Waterproof	2460ELVMLV - 60 W 2496ELVMLV - 96 W 24150ELVMLV - 150 W 24300ELVMLV - 300 W

**COMPATIBLE DIMMERS**

**LUTRON DIVA DIMMER PN: TRIDIMDIVA(With Locator Light) TRIDIMDIVAL**



**DIMENSIONS**

Width: 2.94 in (75 mm)  
Length: 4.69 in (120 mm)  
Depth: 0.30 in (7.6 mm)

**FEATURES**

- Large paddle switch with a captive linear-slide dimmer
- 30 mA max control current
- Available in White finish
- Available with locator light which glows green when the switch is off

**LUTRON NOVA-T DIMMER PN: TRIDIMNOVA**



**DIMENSIONS**

Width: 2.75 in (70 mm)  
Length: 4.56 in (116 mm)  
Depth: 0.30 in (7.6 mm)

**FEATURES**

- Slide adjusts brightness and On/Off control
- 30 mA max control current
- Available in White finish

**LUTRON SKYLARK CONTOUR DIMMER PN: TRIDIMSKY**



**DIMENSIONS**

Width: 2.94 in (75 mm)  
Length: 4.69 in (120 mm)  
Depth: 0.30 in (7.6 mm)

**FEATURES**


- Single pole and 3-way versions
- Compatible with Acolyte Triac Dimmer
- Slide adjusts brightness and On/Off control
- 30 mA max control current
- Available in White finish

**SPECIFICATIONS**

	60 W	96 W
Output Voltage (DC)	24 V	24 V
Rated Current	2.5 A	4.0 A
Rated Power	60 W	96 W
Input Voltage Range (VAC)	100 - 277	100 - 277
Input Current	0.9 A max	1.3 A AC
Frequency Range	50 / 60 Hz	50 / 60 Hz
Efficiency	> 90%	> 90%
Power Factor	> 0.90	> 0.90
Withstand Voltage	1500 V AC	1500 V AC
Dimming Range	1% - 100%	1% - 100%
Ambient Temperature Range	-40° F to 113° F (-40° C to 45° C)	-40° F to 113° F (-40° C to 45° C)
Protection	Short circuit and overload	Short circuit and overload
IP Rating	IP67	IP67
Safety Standards	Conforms to UL STD. 1310, Certified to CSA STD. C22.2 No. 223, CE	Conforms to UL STD. 1310, Certified to CSA STD. C22.2 No. 223, CE
Dimensions	7.4 in. x 3.62 in. x 1.02 in. (L x W x H) (187.96 mm x 91.95 mm x 25.91 mm)	7.73 in. x 5.16 in. x 1.54 in. (L x W x H) (196.34 mm x 131.1 mm x 39.12 mm)
Weight	0.24 lbs / 0.11 kg	3.7 lbs / 1.36 kg
Warranty	7 years	7 years

\* Mount with at least 10" of free flow air space around it

**WIRING DIAGRAM**

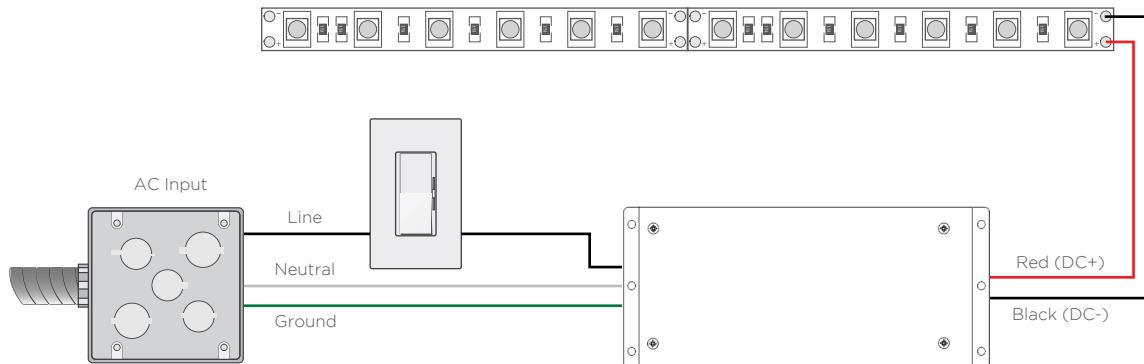

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

**SPECIFICATIONS**

	150 W	300 W
Output Voltage (DC)	24 V	24 V
Rated Current	6.2 A	12.5 A
Rated Power	150 W	300 W
Input Voltage Range (VAC)	100 - 277	100 - 277
Input Current	1.8 A	3.4 A
Frequency Range	50 / 60 Hz	50 / 60 Hz
Efficiency	> 87%	> 87%
Power Factor	> 0.90	> 0.90
Withstand Voltage	1500 V AC	1500 V AC
Dimming Range	1% - 100%	1% - 100%
Temperature Range	-40° F to 113° F (-40° C to 45° C)	-40° F to 113° F (-40° C to 45° C)
Protection	Short circuit and overload	Short circuit and overload
IP Rating	IP67	IP67
Safety Standards	Conforms to UL STD. 8750 Certified to CSA STD. C22.2 No. 107.1, CE	Conforms to UL STD. 8750 Certified to CSA STD. C22.2 No. 107.1, CE
Dimensions	9.99 in. x 5.2 in. x 1.82 in. (L x W x H) (253.75 mm x 132.08 mm x 46.23 mm)	10.94 in. x 4.25 in. x 1.77 in. (L x W x H) (277.88 mm x 107.95 mm x 44.96 mm)
Weight	3 lbs / 1.36 kg	4.2 lbs . 1.91 kg
Warranty	7 years	7 years

\* Mount with at least 10" of free flow air space around it

**DRIVER REMOTE DISTANCES**

Wattages	60 W		96 W		150 W		300 W	
	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
24 AWG / 0.20 mm <sup>2</sup>	9.94	3.030	6.21	1.894	3.98	1.212	1.99	0.606
22 AWG / 0.33 mm <sup>2</sup>	16.82	5.128	10.51	3.205	6.73	2.051	3.36	1.026
20 AWG / 0.52 mm <sup>2</sup>	25.73	7.843	16.08	4.902	10.29	3.137	5.15	1.569
18 AWG / 0.82 mm <sup>2</sup>	41.65	12.698	26.03	7.937	16.66	5.079	8.33	2.540
16 AWG / 1.31 mm <sup>2</sup>	67.28	20.513	42.05	12.821	26.91	8.205	13.46	4.103
14 AWG / 2.08 mm <sup>2</sup>	106.67	32.520	66.67	20.325	42.67	13.008	21.33	6.504
12 AWG / 3.31 mm <sup>2</sup>	168.21	51.282	105.13	32.051	67.28	20.513	33.64	10.256
10 AWG / 5.26 mm <sup>2</sup>	265.05	80.808	165.66	50.505	106.02	32.323	53.01	16.162
8 AWG / 8.37 mm <sup>2</sup>	416.51	126.984	260.32	79.365	166.60	50.794	83.30	25.397

**NOTE:** Calculations include a standard 10% buffer