

Report No.:

Test Time: 2022/11/29 10:24

## Luminaire Property

Luminaire Manufacturer: Acolyte

Luminaire Category: Neon Silhouette

Luminaire Description: Neon Silhouette RGB-Blue only

Lamp Catalog: NLS3.0RGB-Blue only

Luminous Length (mm): 1000

Luminous Height (mm): 12

Current: 0.131 A

Power Factor: 1.000

Number of Lamps: 1

Luminous Width (mm): 06

Voltage: 24.0 V

Power: 3.13 W

## Photometric Results

CIE Class: Direct

Measurement Flux: 14.3 lm

Downward Ratio: 98%

Horizontal Diffuse Angle(10%,50%): H164.4,H108.7

Vertical Diffuse Angle(10%,50%): V169.7,V107.8

Luminaire Efficacy Rating (LER): 5

Max. Intensity: 5.12 cd

Total Rated Lamp Lumens: 14.3 lm

Efficiency: 100%

Upward Ratio: 2%


Central Intensity: 5.05 cd

Pos of Max. Intensity: H0 V6

Picture Of Luminaire



Luminous Intensity Distribution Curve

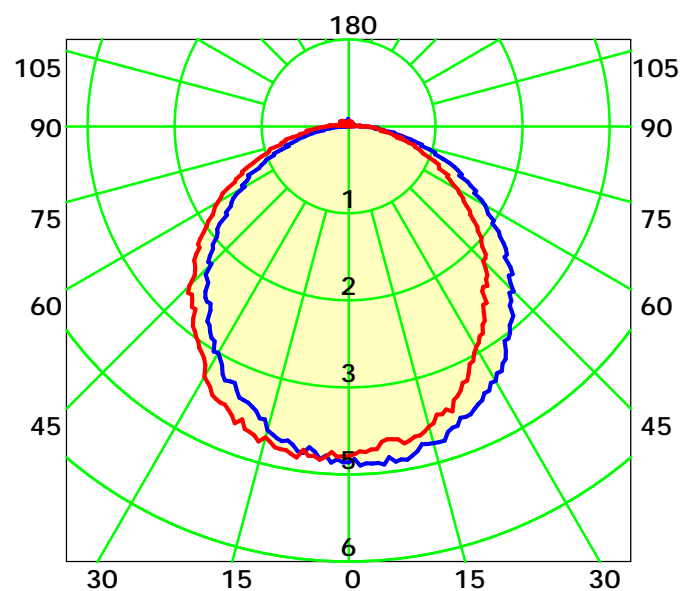

Average Diffuse Angle(50%): 108.2° Unit: cd

— C0-C180 — C90-C270

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature: 25

Operator: Jacky

Gamma Plane (°):0.0-180.0: 1.0


Test Device: GPM-1800B

Distance: 9.028 m

Humidity: 60%

Inspector:


## Luminous Intensity Distribution Curve

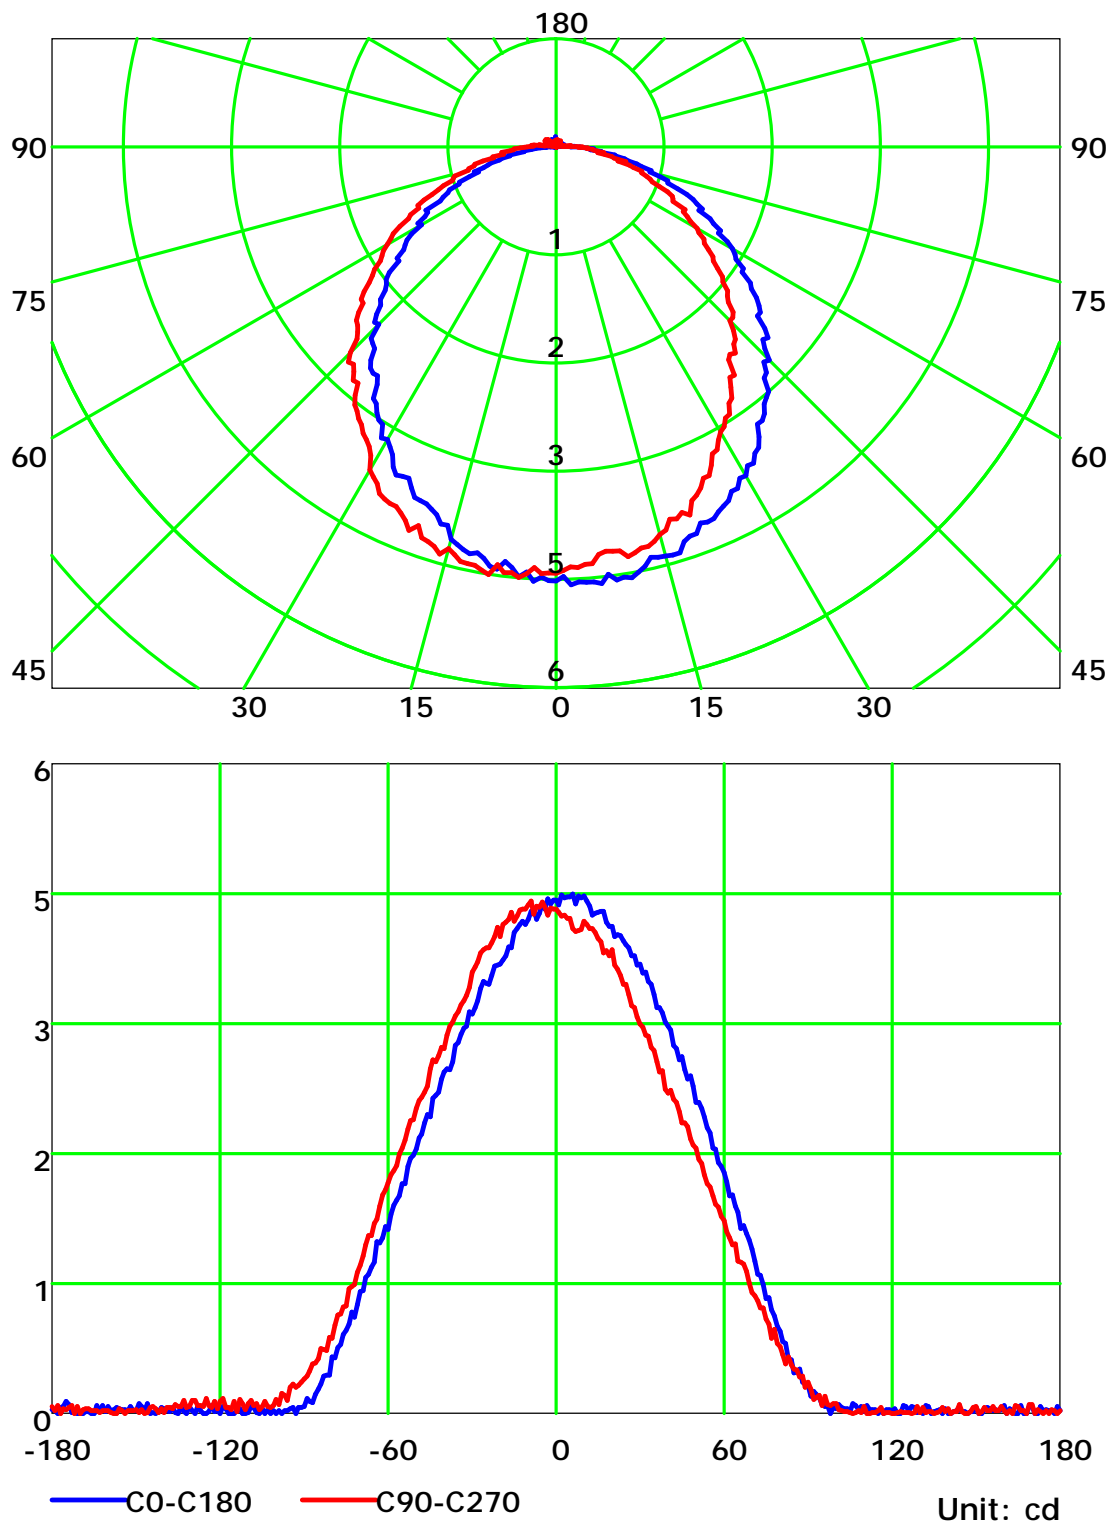

C Plane (°):0.0-360.0: 30.0  
Test Lab:  
Test Type: TYPE C  
Temperature: 25  
Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0  
Test Device: GPM-1800B  
Distance: 9.028 m  
Humidity: 60%  
Inspector:

## Luminous Intensity Distribution Curve(cd/klm)

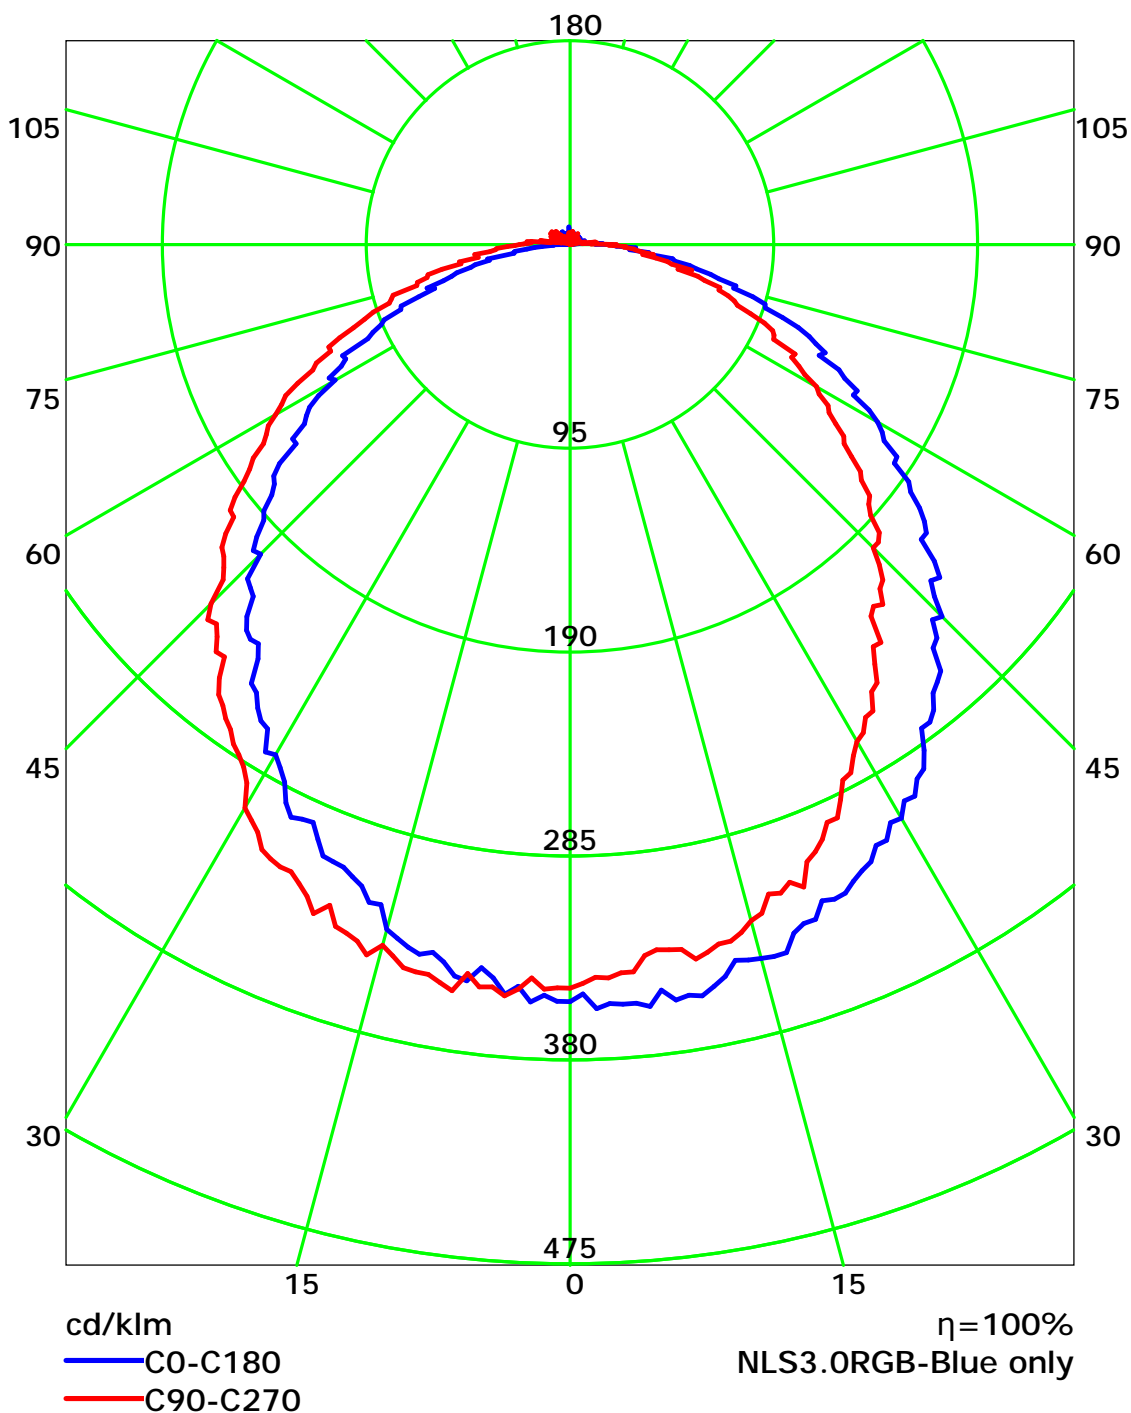

C Plane (°):0.0-360.0: 30.0  
Test Lab:  
Test Type: TYPE C  
Temperature: 25  
Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0  
Test Device: GPM-1800B  
Distance: 9.028 m  
Humidity: 60%  
Inspector:


## Coefficients Of Utilization - Zonal Cavity Method

RC	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.5	0.5	0.5	0.3	0.3	0.3	0.1	0.1	0.1	0
RW	0.7	0.5	0.3	0.1	0.7	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0.5	0.3	0.1	0
RCR	RF = 0.2																	
0	118	118	118	118	115	115	115	115	110	110	110	105	105	105	100	100	100	98
1	108	103	98	94	105	100	96	92	95	92	89	91	88	86	87	85	83	80
2	98	89	82	76	95	87	81	75	83	78	73	79	75	71	76	72	69	67
3	89	78	70	63	86	76	69	63	73	67	61	70	64	60	67	62	58	56
4	81	69	60	54	79	68	59	53	65	58	52	62	56	51	60	55	50	48
5	75	62	53	46	73	61	52	46	58	51	45	56	49	44	54	48	44	41
6	69	56	47	40	67	55	46	40	53	45	39	51	44	39	49	43	38	36
7	64	51	42	36	62	50	41	35	48	40	35	46	39	34	45	39	34	32
8	60	46	38	32	58	45	37	32	44	36	31	42	36	31	41	35	31	29
9	56	42	34	29	54	42	34	28	40	33	28	39	33	28	38	32	28	26
10	52	39	31	26	51	38	31	26	37	30	26	36	30	25	35	29	25	23

Spacing Criteria (0-180): 1.23

Spacing Criteria (90-270): 1.22

Spacing Criteria (Diagonal): 1.32

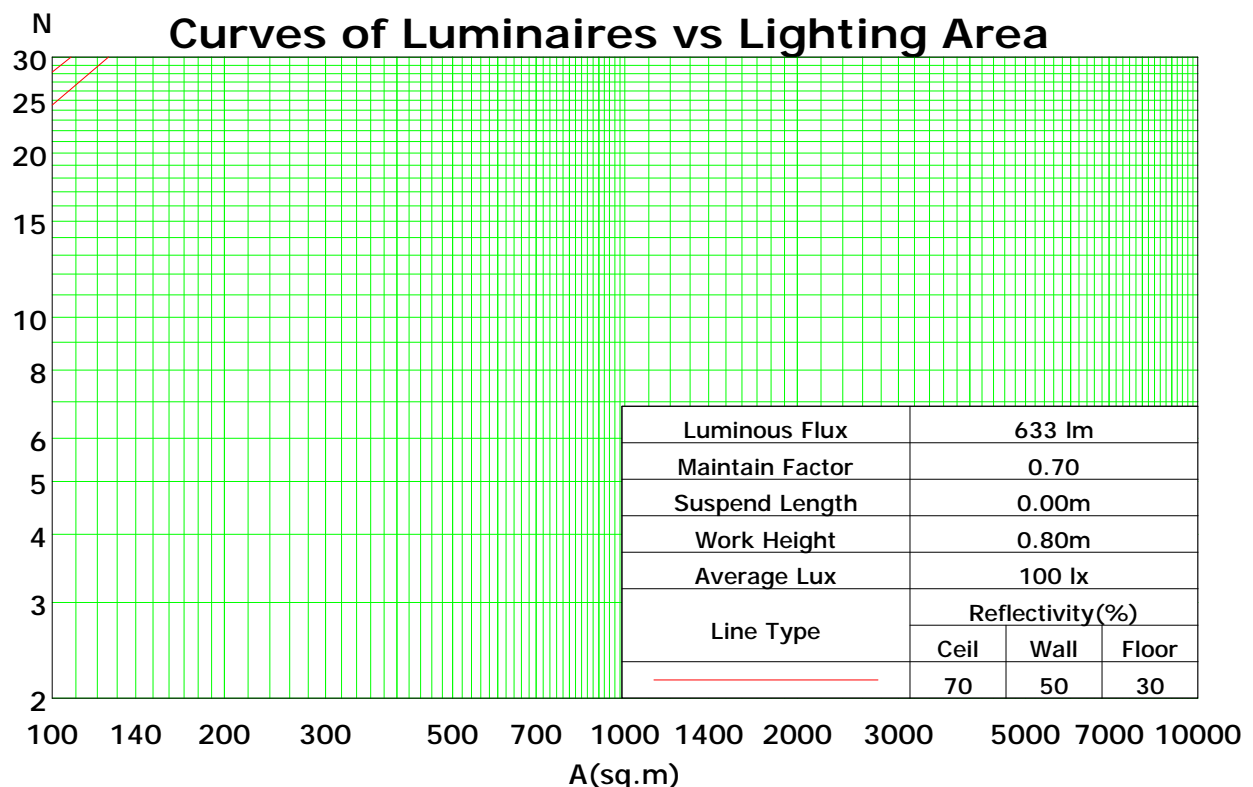

C Plane (°):0.0-360.0: 30.0

Test Lab:

Test Type: TYPE C

Temperature: 25

Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 9.028 m

Humidity: 60%

Inspector:

## Isocandela (rectangle)

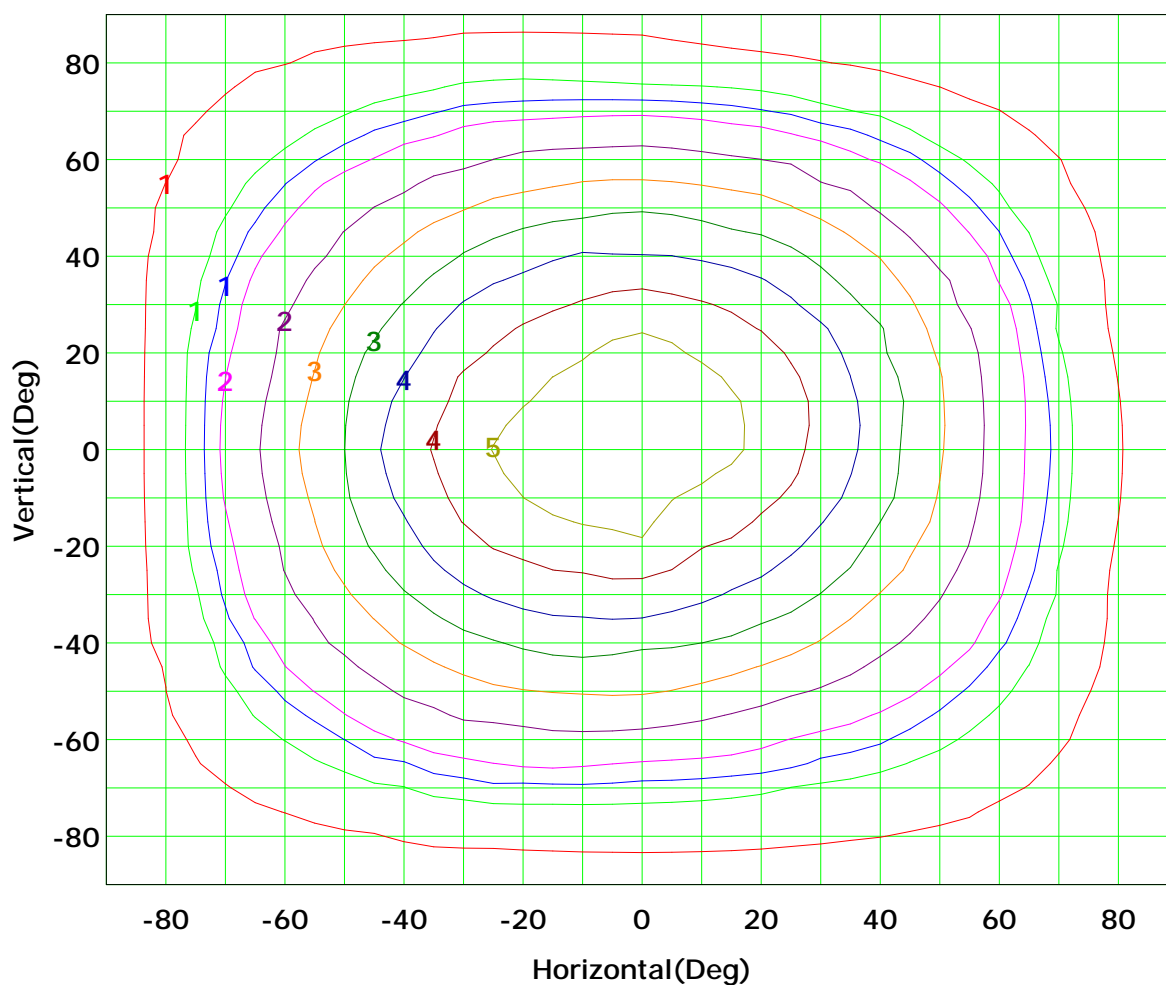


I<sub>max</sub> (100%): 5 cd

( 10%):	1 cd	( 20%):	1 cd
( 25%):	1 cd	( 30%):	2 cd
( 40%):	2 cd	( 50%):	3 cd
( 60%):	3 cd	( 70%):	4 cd
( 80%):	4 cd	( 90%):	5 cd

C Plane (°):0.0-360.0: 30.0  
Test Lab:  
Test Type: TYPE C  
Temperature: 25  
Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0  
Test Device: GPM-1800B  
Distance: 9.028 m  
Humidity: 60%  
Inspector:

## IsoLux Plot

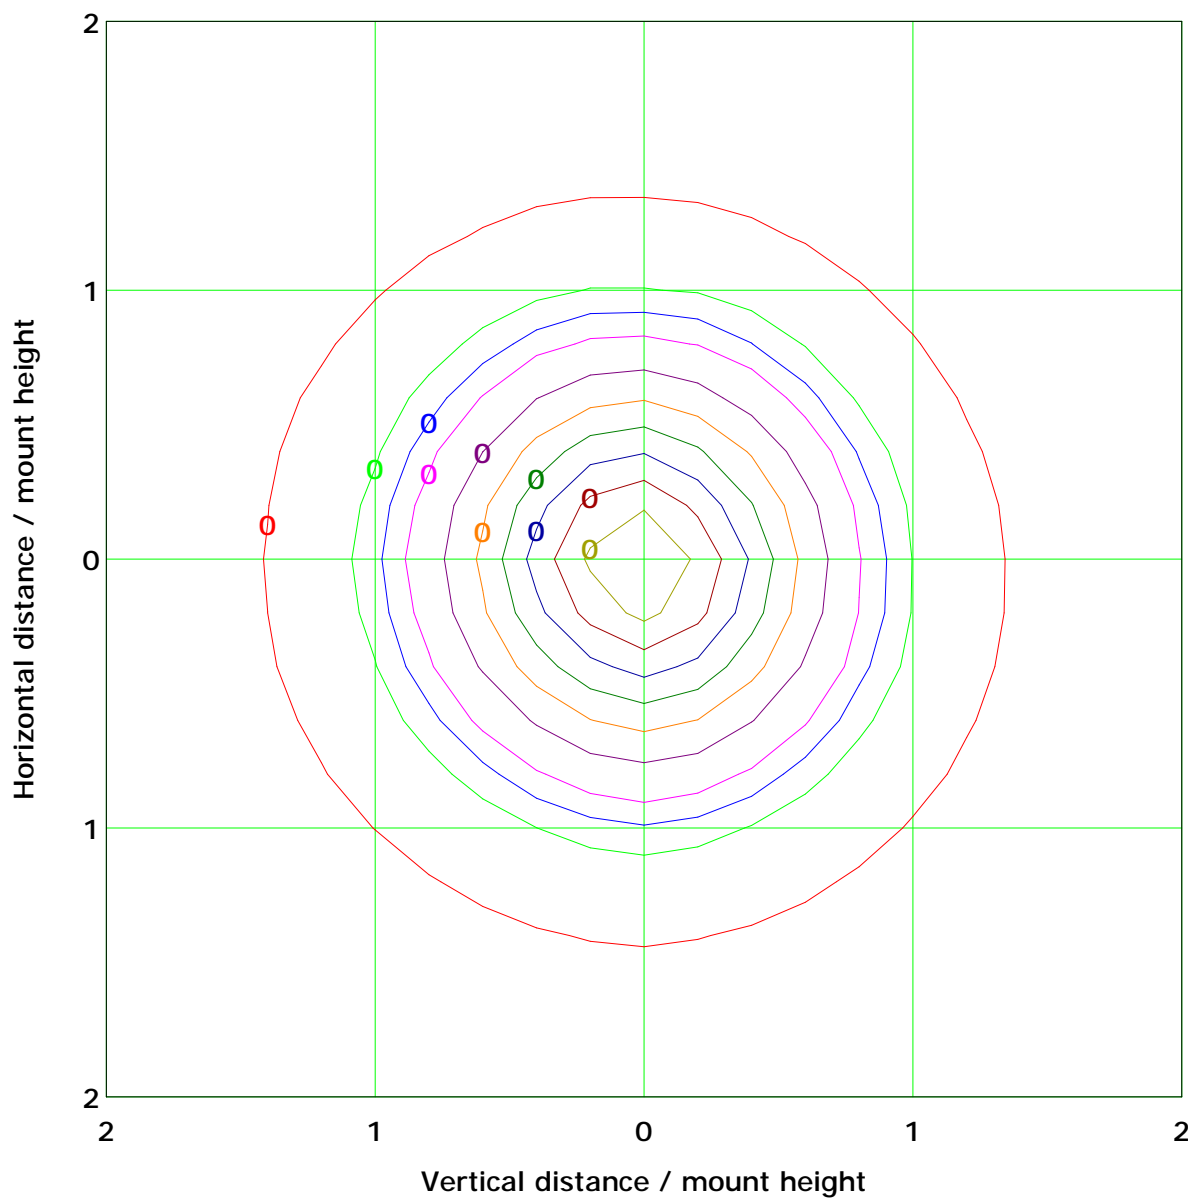


C Plane (°):0.0-360.0: 30.0  
Test Lab:  
Test Type: TYPE C  
Temperature: 25  
Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0  
Test Device: GPM-1800B  
Distance: 9.028 m  
Humidity: 60%  
Inspector:

## Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

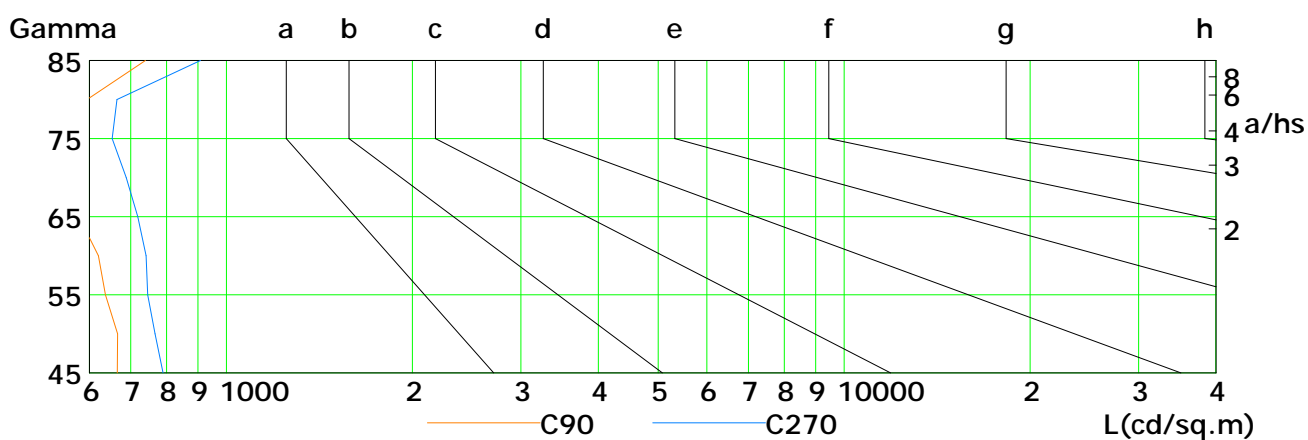


L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	276	234	208	177	148	122	86	63	32
C90	666	667	637	620	577	561	573	593	740
C180	229	199	170	135	111	90	62	44	19
C270	790	767	746	741	719	689	653	665	908

C Plane (°):0.0-360.0: 30.0  
Test Lab:  
Test Type: TYPE C  
Temperature: 25  
Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0  
Test Device: GPM-1800B  
Distance: 9.028 m  
Humidity: 60%  
Inspector:




## Illuminance at a Distance

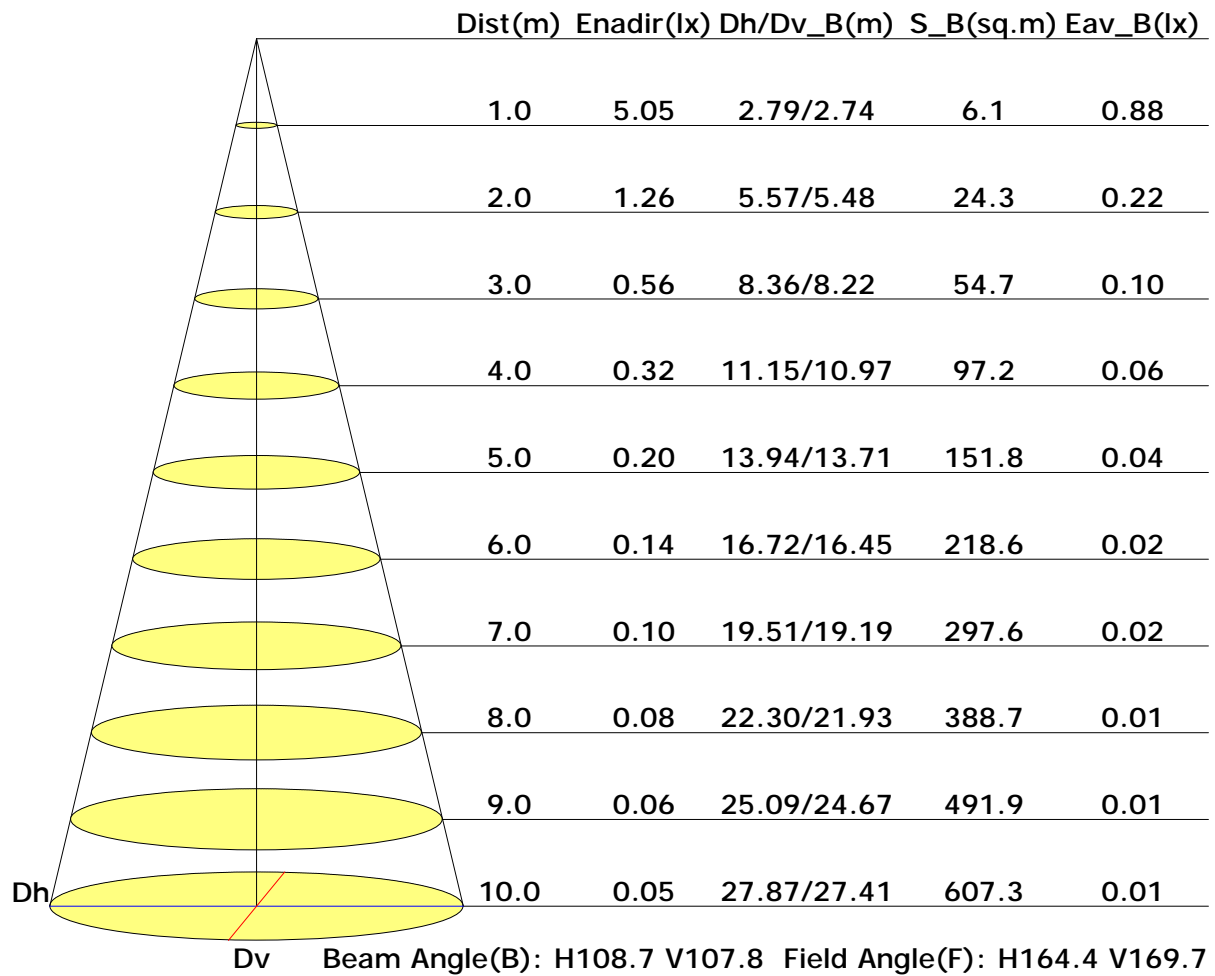





## Vertical IsoLux Plot

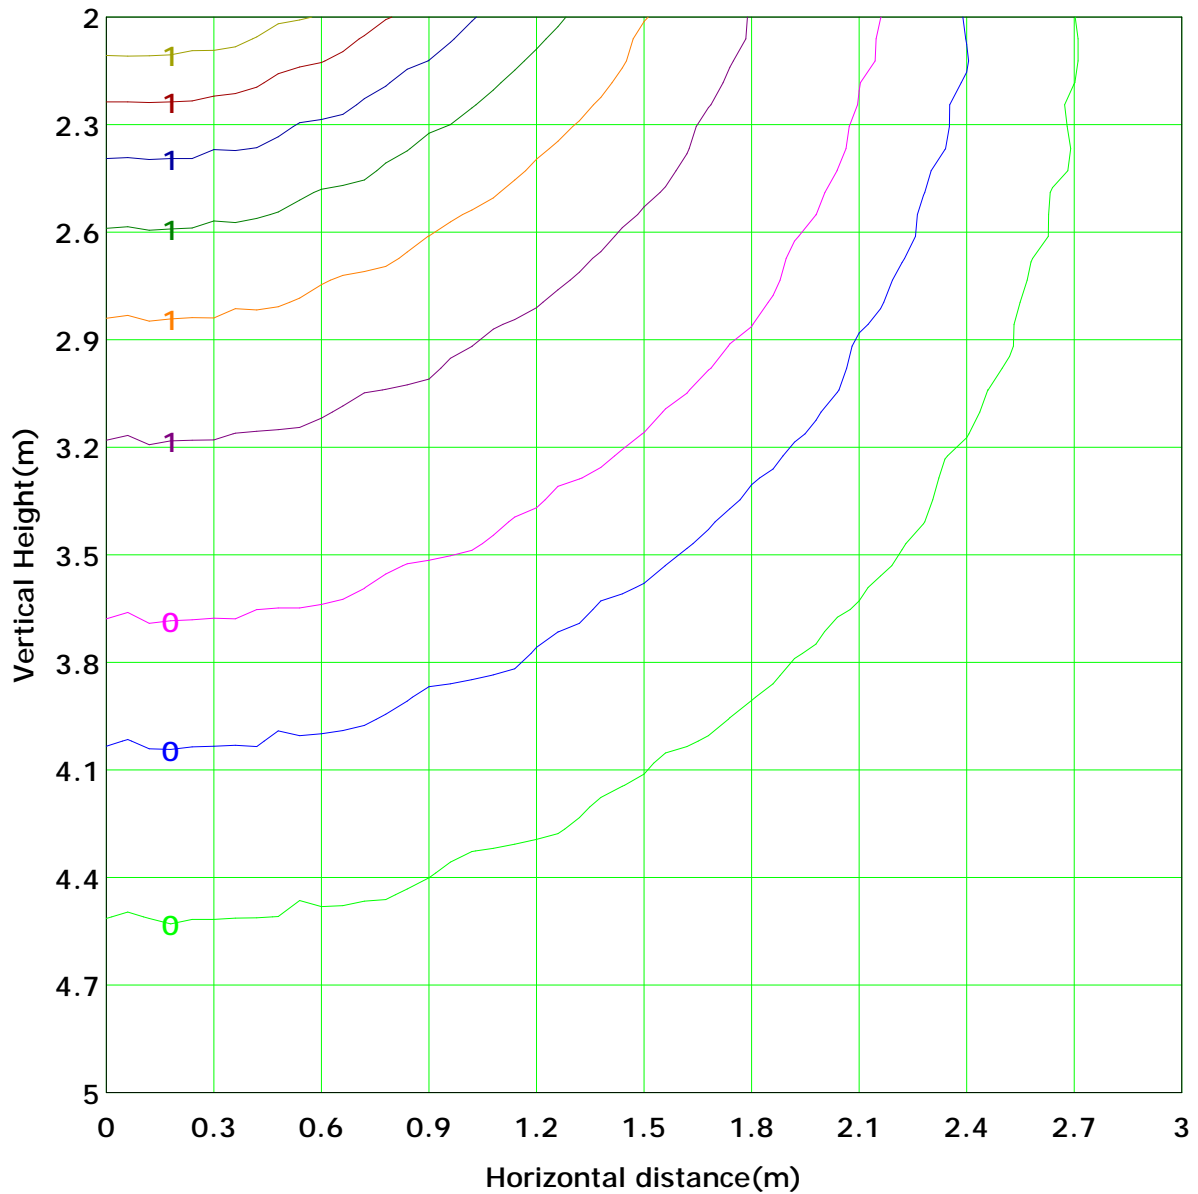

Lowest(m): 2.0m	Highest(m): 5.0m	Max Lux: 1.3 lx
( 10%): 0.1 lx	( 20%): 0.3 lx	( 30%): 0.4 lx
( 25%): 0.3 lx	( 40%): 0.5 lx	( 50%): 0.6 lx
( 60%): 0.8 lx	( 70%): 0.9 lx	( 90%): 1.1 lx
( 80%): 1.0 lx		


C Plane (°):0.0-360.0: 30.0  
Test Lab:  
Test Type: TYPE C  
Temperature: 25  
Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0  
Test Device: GPM-1800B  
Distance: 9.028 m  
Humidity: 60%  
Inspector:

Gamma Plane (°):0.0-180.0:1.0  
Test Device: GPM-1800B  
Distance: 9.028 m  
Humidity: 60%  
Inspector:



## The Average Illuminance Effective Figure

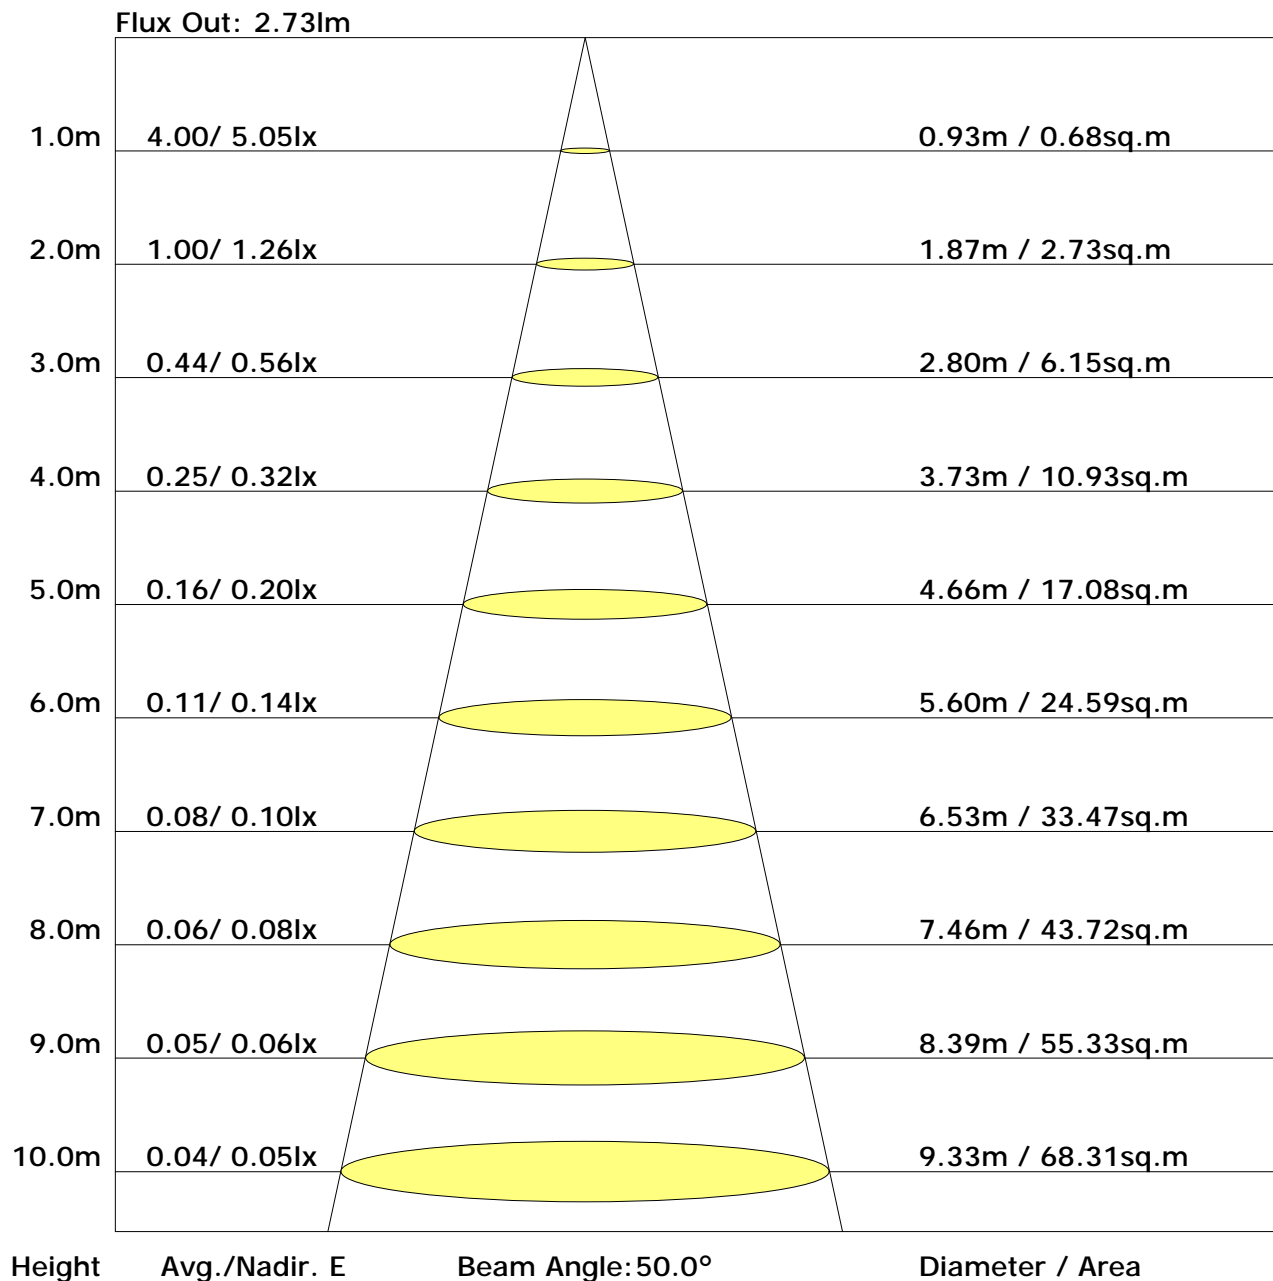

C Plane (°):0.0-360.0: 30.0  
Test Lab:  
Test Type: TYPE C  
Temperature: 25  
Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0  
Test Device: GPM-1800B  
Distance: 9.028 m  
Humidity: 60%  
Inspector:

## UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	23.5	25.1	23.9	25.5	25.9	19.9	21.5	20.3	21.9	22.3
3H	25.6	27.1	26.1	27.5	27.9	21.3	22.8	21.8	23.2	23.6
4H	26.5	27.8	26.9	28.2	28.7	21.8	23.2	22.3	23.6	24.0
6H	27.2	28.4	27.6	28.9	29.3	22.2	23.5	22.6	23.9	24.3
8H	27.5	28.7	27.9	29.1	29.6	22.3	23.5	22.7	23.9	24.4
12H	27.7	28.8	28.1	29.3	29.7	22.4	23.5	22.8	24.0	24.4
X=4H Y=2H	23.8	25.1	24.2	25.5	26.0	20.7	22.0	21.1	22.4	22.8
3H	26.0	27.1	26.4	27.6	28.0	22.2	23.4	22.7	23.8	24.3
4H	26.9	27.9	27.4	28.4	28.9	22.8	23.8	23.3	24.3	24.8
6H	27.7	28.6	28.2	29.1	29.6	23.3	24.2	23.7	24.7	25.2
8H	28.0	28.9	28.5	29.4	29.9	23.4	24.2	23.9	24.7	25.2
12H	28.3	29.1	28.8	29.6	30.1	23.5	24.3	24.0	24.8	25.3
X=8H Y=4H	27.0	27.8	27.5	28.3	28.8	23.1	24.0	23.6	24.5	25.0
6H	27.8	28.6	28.4	29.1	29.6	23.7	24.4	24.2	24.9	25.5
8H	28.2	28.9	28.8	29.4	29.9	23.9	24.5	24.4	25.1	25.6
12H	28.5	29.1	29.1	29.6	30.3	24.1	24.7	24.6	25.2	25.8
X=12H Y=4H	27.0	27.8	27.5	28.3	28.8	23.2	24.0	23.7	24.5	25.0
6H	27.9	28.5	28.4	29.0	29.6	23.8	24.4	24.3	24.9	25.5
8H	28.2	28.8	28.8	29.4	30.0	24.0	24.6	24.6	25.1	25.7

Calculate in accordance with CIE 190:2010

 C Plane (°):0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: Jacky

 Gamma Plane (°):0.0-180.0: 1.0  
 Test Device: GPM-1800B  
 Distance: 9.028 m  
 Humidity: 60%  
 Inspector:

## Utilisation Factor Table(Floor cavity)

Utilisation Factors UF(F)			SHR NOM = 1.25								
Room Reflectance			Room Index(RI)								
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.55	0.66	0.73	0.78	0.85	0.90	0.94	0.98	1.01
	0.30		0.48	0.58	0.65	0.71	0.79	0.84	0.88	0.94	0.98
	0.20		0.42	0.52	0.59	0.65	0.74	0.80	0.84	0.90	0.94
0.50	0.50	0.20	0.54	0.63	0.70	0.75	0.82	0.86	0.90	0.94	0.97
	0.30		0.47	0.56	0.64	0.69	0.76	0.82	0.85	0.90	0.94
	0.20		0.41	0.51	0.58	0.64	0.72	0.77	0.82	0.87	0.91
0.30	0.50	0.20	0.52	0.61	0.68	0.72	0.79	0.83	0.86	0.90	0.92
	0.30		0.46	0.55	0.62	0.67	0.74	0.79	0.82	0.87	0.90
	0.20		0.41	0.51	0.57	0.63	0.70	0.75	0.79	0.84	0.88
0.00	0.00	0.00	0.39	0.48	0.54	0.59	0.66	0.71	0.75	0.79	0.83
Rating: 3W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980											

## Utilisation Factor Table(Wall)

Utilisation Factors UF(W)			SHR NOM = 1.25									
Room Reflectance			Room Index(RI)									
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.70	0.50	0.20	1.00	0.83	0.71	0.62	0.50	0.42	0.36	0.28	0.23	
	0.30		0.83	0.71	0.62	0.55	0.45	0.38	0.33	0.26	0.22	
	0.20		0.71	0.62	0.55	0.49	0.41	0.35	0.31	0.25	0.21	
0.50	0.50	0.20	0.96	0.79	0.68	0.59	0.48	0.43	0.34	0.27	0.22	
	0.30		0.81	0.69	0.60	0.53	0.43	0.37	0.32	0.25	0.21	
	0.20		0.70	0.61	0.54	0.48	0.40	0.34	0.30	0.24	0.20	
0.30	0.50	0.20	0.93	0.76	0.65	0.57	0.45	0.38	0.32	0.25	0.21	
	0.30		0.79	0.67	0.58	0.51	0.42	0.35	0.31	0.24	0.20	
	0.20		0.69	0.60	0.52	0.47	0.39	0.33	0.29	0.23	0.19	
0.00	0.00	0.00	0.59	0.50	0.43	0.38	0.31	0.26	0.23	0.18	0.15	
Rating: 3W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980												

## Utilisation Factor Table(Ceiling cavity)

Utilisation Factors UF(C)			SHR NOM = 1.25								
Room Reflectance			Room Index(RI)								
Ceiling	Wall	Floor	0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00
0.70	0.50	0.20	0.18	0.20	0.21	0.21	0.22	0.23	0.23	0.24	0.24
	0.30		0.12	0.13	0.15	0.16	0.17	0.18	0.19	0.20	0.21
	0.20		0.07	0.08	0.10	0.11	0.13	0.15	0.16	0.18	0.19
0.50	0.50	0.20	0.18	0.19	0.20	0.20	0.21	0.22	0.22	0.23	0.23
	0.30		0.11	0.13	0.14	0.15	0.17	0.18	0.19	0.20	0.20
	0.20		0.07	0.08	0.10	0.11	0.13	0.14	0.15	0.17	0.18
0.30	0.50	0.20	0.17	0.18	0.19	0.20	0.20	0.21	0.21	0.22	0.22
	0.30		0.11	0.13	0.14	0.15	0.16	0.17	0.18	0.19	0.20
	0.20		0.07	0.08	0.10	0.11	0.12	0.14	0.15	0.17	0.18
0.00	0.00	0.00	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
Rating: 3W Photometrically tested without ceiling board. Multiply UF values by service correction factors Calculate in accordance with CIBSE Technical Memorandum NO.5 1980											

## Zonal Lumen

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
0.0-1.0	4.9	0.0	0.0	0.03	0.03
1.0-2.0	4.9	0.0	0.0	0.10	0.13
2.0-3.0	4.9	0.0	0.0	0.17	0.30
3.0-4.0	4.9	0.0	0.1	0.23	0.53
4.0-5.0	4.9	0.0	0.1	0.30	0.82
5.0-6.0	4.9	0.1	0.2	0.36	1.19
6.0-7.0	4.9	0.1	0.2	0.42	1.61
7.0-8.0	4.9	0.1	0.3	0.49	2.10
8.0-9.0	4.9	0.1	0.4	0.55	2.65
9.0-10.0	4.9	0.1	0.5	0.62	3.27
10.0-11.0	4.8	0.1	0.6	0.68	3.94
11.0-12.0	4.8	0.1	0.7	0.74	4.68
12.0-13.0	4.8	0.1	0.8	0.80	5.47
13.0-14.0	4.8	0.1	0.9	0.85	6.33
14.0-15.0	4.7	0.1	1.0	0.91	7.24
15.0-16.0	4.7	0.1	1.2	0.97	8.20
16.0-17.0	4.7	0.1	1.3	1.02	9.22
17.0-18.0	4.6	0.2	1.5	1.07	10.29
18.0-19.0	4.6	0.2	1.6	1.12	11.41
19.0-20.0	4.6	0.2	1.8	1.17	12.59
20.0-21.0	4.5	0.2	2.0	1.22	13.81
21.0-22.0	4.5	0.2	2.2	1.26	15.07
22.0-23.0	4.4	0.2	2.3	1.30	16.37
23.0-24.0	4.4	0.2	2.5	1.34	17.72
24.0-25.0	4.4	0.2	2.7	1.39	19.10
25.0-26.0	4.3	0.2	2.9	1.42	20.53
26.0-27.0	4.3	0.2	3.1	1.46	21.98
27.0-28.0	4.2	0.2	3.4	1.49	23.47
28.0-29.0	4.2	0.2	3.6	1.52	24.99
29.0-30.0	4.1	0.2	3.8	1.55	26.54
30.0-31.0	4.1	0.2	4.0	1.58	28.12
31.0-32.0	4.0	0.2	4.3	1.60	29.72
32.0-33.0	3.9	0.2	4.5	1.62	31.34
33.0-34.0	3.9	0.2	4.7	1.64	32.98
34.0-35.0	3.8	0.2	5.0	1.66	34.64
35.0-36.0	3.7	0.2	5.2	1.67	36.31

C Plane (°): 0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0  
 Test Device: GPM-1800B  
 Distance: 9.028 m  
 Humidity: 60%  
 Inspector:



## Zonal Lumen (Continue 1)

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
36.0-37.0	3.7	0.2	5.4	1.68	37.99
37.0-38.0	3.6	0.2	5.7	1.70	39.69
38.0-39.0	3.6	0.2	5.9	1.70	41.39
39.0-40.0	3.5	0.2	6.2	1.71	43.10
40.0-41.0	3.4	0.2	6.4	1.71	44.82
41.0-42.0	3.4	0.2	6.7	1.72	46.53
42.0-43.0	3.3	0.2	6.9	1.71	48.25
43.0-44.0	3.2	0.2	7.1	1.71	49.95
44.0-45.0	3.2	0.2	7.4	1.71	51.66
45.0-46.0	3.1	0.2	7.6	1.70	53.36
46.0-47.0	3.0	0.2	7.9	1.69	55.05
47.0-48.0	3.0	0.2	8.1	1.67	56.72
48.0-49.0	2.9	0.2	8.4	1.66	58.39
49.0-50.0	2.8	0.2	8.6	1.65	60.04
50.0-51.0	2.7	0.2	8.8	1.63	61.66
51.0-52.0	2.7	0.2	9.1	1.61	63.27
52.0-53.0	2.6	0.2	9.3	1.60	64.87
53.0-54.0	2.5	0.2	9.5	1.57	66.44
54.0-55.0	2.5	0.2	9.7	1.54	67.98
55.0-56.0	2.4	0.2	9.9	1.51	69.49
56.0-57.0	2.3	0.2	10.2	1.48	70.97
57.0-58.0	2.2	0.2	10.4	1.45	72.42
58.0-59.0	2.2	0.2	10.6	1.42	73.84
59.0-60.0	2.1	0.2	10.8	1.39	75.23
60.0-61.0	2.0	0.2	11.0	1.35	76.58
61.0-62.0	2.0	0.2	11.1	1.32	77.90
62.0-63.0	1.9	0.2	11.3	1.29	79.18
63.0-64.0	1.8	0.2	11.5	1.25	80.44
64.0-65.0	1.7	0.2	11.7	1.20	81.64
65.0-66.0	1.7	0.2	11.8	1.16	82.80
66.0-67.0	1.6	0.2	12.0	1.13	83.93
67.0-68.0	1.5	0.2	12.2	1.09	85.02
68.0-69.0	1.5	0.1	12.3	1.04	86.05
69.0-70.0	1.4	0.1	12.5	0.99	87.05
70.0-71.0	1.3	0.1	12.6	0.94	87.99
71.0-72.0	1.2	0.1	12.7	0.90	88.89

C Plane (°): 0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0  
 Test Device: GPM-1800B  
 Distance: 9.028 m  
 Humidity: 60%  
 Inspector:

## Zonal Lumen (Continue 2)

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
72.0-73.0	1.2	0.1	12.8	0.85	89.74
73.0-74.0	1.1	0.1	13.0	0.81	90.55
74.0-75.0	1.0	0.1	13.1	0.76	91.31
75.0-76.0	1.0	0.1	13.2	0.72	92.03
76.0-77.0	0.9	0.1	13.3	0.68	92.71
77.0-78.0	0.9	0.1	13.4	0.64	93.34
78.0-79.0	0.8	0.1	13.4	0.59	93.94
79.0-80.0	0.7	0.1	13.5	0.54	94.47
80.0-81.0	0.7	0.1	13.6	0.49	94.97
81.0-82.0	0.6	0.1	13.6	0.45	95.41
82.0-83.0	0.5	0.1	13.7	0.40	95.82
83.0-84.0	0.5	0.1	13.8	0.37	96.18
84.0-85.0	0.4	0.0	13.8	0.32	96.51
85.0-86.0	0.4	0.0	13.8	0.28	96.79
86.0-87.0	0.3	0.0	13.9	0.25	97.04
87.0-88.0	0.3	0.0	13.9	0.22	97.26
88.0-89.0	0.3	0.0	13.9	0.19	97.46
89.0-90.0	0.2	0.0	14.0	0.18	97.63
90.0-91.0	0.2	0.0	14.0	0.15	97.78
91.0-92.0	0.2	0.0	14.0	0.12	97.91
92.0-93.0	0.1	0.0	14.0	0.11	98.02
93.0-94.0	0.1	0.0	14.0	0.11	98.13
94.0-95.0	0.1	0.0	14.0	0.10	98.22
95.0-96.0	0.1	0.0	14.1	0.08	98.30
96.0-97.0	0.1	0.0	14.1	0.07	98.37
97.0-98.0	0.1	0.0	14.1	0.06	98.43
98.0-99.0	0.1	0.0	14.1	0.05	98.48
99.0-100.0	0.1	0.0	14.1	0.05	98.53
100.0-101.0	0.1	0.0	14.1	0.05	98.58
101.0-102.0	0.1	0.0	14.1	0.04	98.62
102.0-103.0	0.1	0.0	14.1	0.04	98.65
103.0-104.0	0.1	0.0	14.1	0.04	98.69
104.0-105.0	0.0	0.0	14.1	0.03	98.72
105.0-106.0	0.0	0.0	14.1	0.03	98.76
106.0-107.0	0.0	0.0	14.1	0.04	98.79
107.0-108.0	0.0	0.0	14.1	0.03	98.82

C Plane (°): 0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0  
 Test Device: GPM-1800B  
 Distance: 9.028 m  
 Humidity: 60%  
 Inspector:

## Zonal Lumen (Continue 3)

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
108.0-109.0	0.1	0.0	14.1	0.04	98.86
109.0-110.0	0.1	0.0	14.1	0.04	98.90
110.0-111.0	0.0	0.0	14.2	0.03	98.93
111.0-112.0	0.0	0.0	14.2	0.03	98.96
112.0-113.0	0.0	0.0	14.2	0.03	98.99
113.0-114.0	0.0	0.0	14.2	0.03	99.02
114.0-115.0	0.0	0.0	14.2	0.02	99.04
115.0-116.0	0.0	0.0	14.2	0.02	99.07
116.0-117.0	0.0	0.0	14.2	0.02	99.09
117.0-118.0	0.0	0.0	14.2	0.03	99.11
118.0-119.0	0.0	0.0	14.2	0.03	99.14
119.0-120.0	0.0	0.0	14.2	0.03	99.17
120.0-121.0	0.0	0.0	14.2	0.02	99.19
121.0-122.0	0.0	0.0	14.2	0.02	99.22
122.0-123.0	0.0	0.0	14.2	0.03	99.24
123.0-124.0	0.0	0.0	14.2	0.03	99.27
124.0-125.0	0.0	0.0	14.2	0.03	99.30
125.0-126.0	0.0	0.0	14.2	0.03	99.32
126.0-127.0	0.0	0.0	14.2	0.02	99.34
127.0-128.0	0.0	0.0	14.2	0.03	99.37
128.0-129.0	0.0	0.0	14.2	0.03	99.40
129.0-130.0	0.0	0.0	14.2	0.03	99.43
130.0-131.0	0.0	0.0	14.2	0.03	99.46
131.0-132.0	0.0	0.0	14.2	0.02	99.48
132.0-133.0	0.1	0.0	14.2	0.03	99.51
133.0-134.0	0.1	0.0	14.2	0.03	99.54
134.0-135.0	0.0	0.0	14.2	0.02	99.56
135.0-136.0	0.0	0.0	14.2	0.02	99.58
136.0-137.0	0.0	0.0	14.2	0.02	99.60
137.0-138.0	0.0	0.0	14.2	0.02	99.62
138.0-139.0	0.0	0.0	14.3	0.02	99.64
139.0-140.0	0.0	0.0	14.3	0.02	99.66
140.0-141.0	0.0	0.0	14.3	0.02	99.68
141.0-142.0	0.0	0.0	14.3	0.02	99.70
142.0-143.0	0.0	0.0	14.3	0.02	99.71
143.0-144.0	0.0	0.0	14.3	0.02	99.73

C Plane (°):0.0-360.0: 30.0  
Test Lab:  
Test Type: TYPE C  
Temperature: 25  
Operator: Jacky

Gamma Plane (°):0.0-180.0:1.0  
Test Device: GPM-1800B  
Distance: 9.028 m  
Humidity: 60%  
Inspector:

## Zonal Lumen (Continue 4)

Gamma [°]	I <sub>mean</sub> [cd]	Zonal Flux [lm]	Sum Zonal Flux [lm]	Rel Zonal Flux [%]	Sum Rel Zonal Flux [%]
144.0-145.0	0.0	0.0	14.3	0.01	99.74
145.0-146.0	0.0	0.0	14.3	0.01	99.76
146.0-147.0	0.0	0.0	14.3	0.01	99.77
147.0-148.0	0.0	0.0	14.3	0.01	99.78
148.0-149.0	0.0	0.0	14.3	0.01	99.79
149.0-150.0	0.0	0.0	14.3	0.01	99.81
150.0-151.0	0.0	0.0	14.3	0.01	99.82
151.0-152.0	0.0	0.0	14.3	0.01	99.83
152.0-153.0	0.0	0.0	14.3	0.01	99.85
153.0-154.0	0.0	0.0	14.3	0.01	99.86
154.0-155.0	0.0	0.0	14.3	0.01	99.87
155.0-156.0	0.0	0.0	14.3	0.01	99.88
156.0-157.0	0.0	0.0	14.3	0.01	99.89
157.0-158.0	0.0	0.0	14.3	0.01	99.90
158.0-159.0	0.0	0.0	14.3	0.01	99.91
159.0-160.0	0.0	0.0	14.3	0.01	99.92
160.0-161.0	0.0	0.0	14.3	0.01	99.92
161.0-162.0	0.0	0.0	14.3	0.01	99.93
162.0-163.0	0.0	0.0	14.3	0.01	99.93
163.0-164.0	0.0	0.0	14.3	0.01	99.94
164.0-165.0	0.0	0.0	14.3	0.01	99.95
165.0-166.0	0.0	0.0	14.3	0.01	99.95
166.0-167.0	0.0	0.0	14.3	0.01	99.96
167.0-168.0	0.0	0.0	14.3	0.01	99.97
168.0-169.0	0.0	0.0	14.3	0.00	99.97
169.0-170.0	0.0	0.0	14.3	0.01	99.98
170.0-171.0	0.0	0.0	14.3	0.00	99.98
171.0-172.0	0.0	0.0	14.3	0.00	99.98
172.0-173.0	0.0	0.0	14.3	0.00	99.99
173.0-174.0	0.0	0.0	14.3	0.00	99.99
174.0-175.0	0.0	0.0	14.3	0.00	99.99
175.0-176.0	0.0	0.0	14.3	0.00	100.00
176.0-177.0	0.0	0.0	14.3	0.00	100.00
177.0-178.0	0.0	0.0	14.3	0.00	100.00
178.0-179.0	0.0	0.0	14.3	0.00	100.00
179.0-180.0	0.0	0.0	14.3	0.00	100.00

C Plane (°): 0.0-360.0: 30.0  
 Test Lab:  
 Test Type: TYPE C  
 Temperature: 25  
 Operator: Jacky

Gamma Plane (°): 0.0-180.0: 1.0  
 Test Device: GPM-1800B  
 Distance: 9.028 m  
 Humidity: 60%  
 Inspector: