

PICCOLO MICRO FIXTURES

RoHS IP20

Declare. TM66 ASSESSED TITLE 24 JA8 COMPLIANT 2200K-4000K

Available Color Temperatures

2200K 2400K 2700K 3000K 3500K 4000K

Housing finishes

Silver Black* Custom*

*Consult factory. Additional fee and MOQ apply.

Available Lens

Milky Lens
63% Light Transmission


Piccolo is a family of custom micro fixtures that use a flat milky lens to create tiny, diode-free lines of light in tight spaces such as custom millwork (Piccolo) or small corners (Piccolo 45). Both the Piccolo and the Piccolo 45 are sold in custom sizes ranging from 2.43 in. (61.8 mm) to 6 ft. 6.81 in. (2001.8 mm) long in increments of 0.2 in. (5 mm). The Piccolo family features a special IP20 micro RibbonLyte that provides 90+ CRI in six available CCTs ranging from 2200K to 4000K.

COMMON FEATURES


- 2.9 W/ft (9.6 W/m)
- Smallest fixture at 2.43 in. (61.8 mm) including end caps
- Sold in 0.2 in. (5 mm) increments up to 6 ft. 6.81 in. (2001.8 mm)
- 61 LEDs/ft (200 LEDs/m)
- 90+ CRI, diode-free
- 140-170 lm/ft (460-560 lm/m)
- IP20 rating (for indoor use)

Piccolo

- 0.2 in. (5 mm) wide by 0.23 in. (5.91 mm) high
- Mount with Mounting Clips or VHB tape
- 120° beam angle

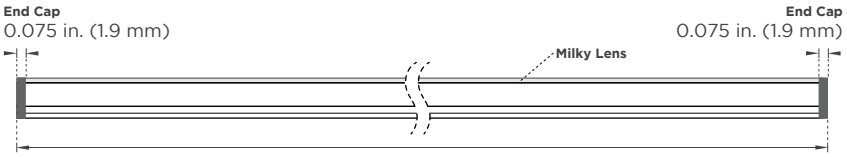


From 2.43 in. (61.8 mm) to 6 ft. 6.81 in. (2001.8 mm) long
in increments of 0.2 in. (5 mm)




Piccolo 45

- 0.26 in. (6.6 mm) wide by 0.26 in. (6.6 mm) high
- Mount with Mounting Clips or VHB tape
- 120° beam angle presented at 45°

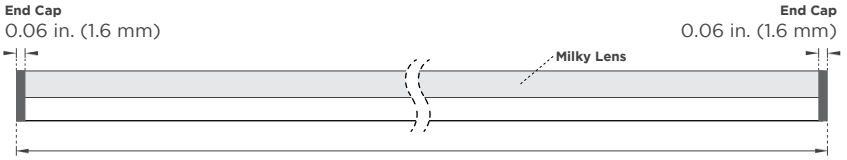

From 2.43 in. (61.8 mm) to 6 ft. 6.81 in. (2001.8 mm) long
in increments of 0.2 in. (5 mm)





REV. 17NOV2026