



PICCOLO MICRO FIXTURES

UL CE RoHS IP20

Declare.

TM66
ASSESSED

TITLE 24
IA3
COMPLIANT

Available Color Temperatures



Housing finishes



*Consult factory. Additional fee and MOQ apply.

Available Lens



Milky Lens
63% Light Transmission



Piccolo is a family of custom micro fixtures that use a flat milky lens to create tiny, diode-free lines of light in tight spaces such as custom millwork (Piccolo) or small corners (Piccolo 45). Both the Piccolo and the Piccolo 45 are sold in custom sizes ranging from 2.43 in. (61.8 mm) to 6 ft. 6.81 in. (2001.8 mm) long in increments of 0.2 in. (5 mm). The Piccolo family features a special IP20 micro RibbonLyte that provides 90+ CRI in six available CCTs ranging from 2200K to 4000K.

COMMON FEATURES

- 2.9 W/ft (9.6 W/m)
- Smallest fixture at 2.43 in. (61.8 mm) including end caps
- Sold in 0.2 in. (5 mm) increments up to 6 ft. 6.81 in. (2001.8 mm)
- 61 LEDs/ft (200 LEDs/m)
- 90+ CRI, diode-free
- IP20 rating (for indoor use)

Piccolo

- 0.2 in. (5 mm) wide by 0.23 in. (5.91 mm) high
- Mount with Mounting Clips or VHB tape
- 120° beam angle

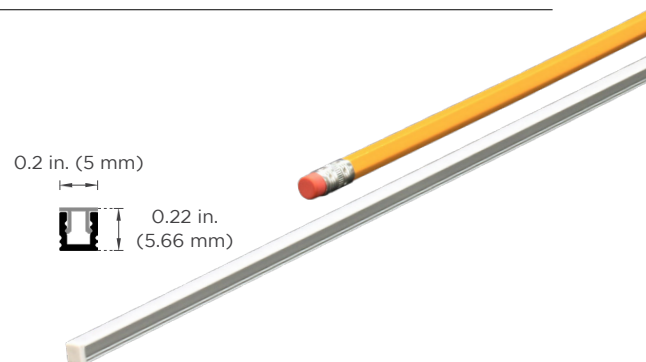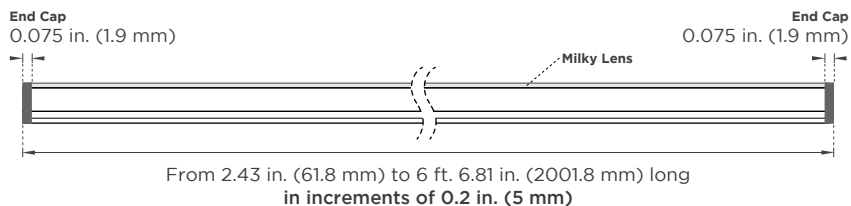

Piccolo 45

- 0.26 in. (6.6 mm) wide by 0.26 in. (6.6 mm) high
- Mount with Mounting Clips or VHB tape
- 120° beam angle presented at 45°

