




# Scroll Pendant Series


Design open curves and flowing custom shapes.  
If you can draw it, we can do it!

- 3 standard sizes and 2 styles
- 24V fixtures use remote drivers
- Static White (90+ CRI) fixtures are Constant Current
- Variable White and RGBW fixtures are Constant Voltage

## HOUSING FINISHES

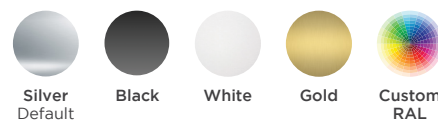

## COLOR TEMPERATURES & COLORS




### Scroll135



Direct lighting

Pendant or Surface Mounted fixtures  
Static White high output models at  
56.7 lm/W, 465 lm/ft (1525.2 lm/m)  
Min. bending diameter: 31.5 in. (800 mm)


### Scroll150



Direct and Indirect lighting

Pendant or Surface Mounted fixtures  
Static White high output models at  
66.5 lm/W, 479 lm/ft (1571.1 lm/m)  
Min. bending diameter: 39.4 in. (1000 mm)


### Scroll180

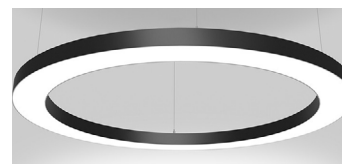

Direct lighting

Pendant or Surface Mounted fixtures  
Static White high output models at  
67.2 lm/W, 1109.1 lm/ft (3637.8 lm/m)  
Min. bending diameter: 23.6 in. (600 mm)


### Scroll135S



Side-illuminated

Pendant or Surface Mounted fixtures  
Static White high output models at  
63 lm/W, 654.7 lm/ft (2147.4 lm/m)  
Min. bending diameter: 23.6 in. (600 mm)


### Scroll150S



Side-illuminated

Pendant or Surface Mounted fixtures  
Static White high output models at  
66.2 lm/W, 695.6 lm/ft (2281.6 lm/m)  
Min. bending diameter: 27.6 in. (700 mm)

### Scroll180S



Side-illuminated

Pendant or Surface Mounted fixtures  
Static White high output models at  
71.8 lm/W, 1507.9 lm/ft (4945.9 lm/m)  
Min. bending diameter: 27.6 in. (700 mm)