




Scroll Pendant Series


Design open curves and flowing custom shapes.
If you can draw it, we can do it!

- 3 standard sizes and 2 styles
- 24V fixtures use remote drivers
- Static White (90+ CRI) fixtures are Constant Current
- Variable White and RGBW fixtures are Constant Voltage

HOUSING FINISHES

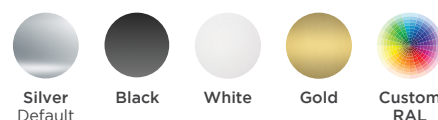

COLOR TEMPERATURES & COLORS




Scroll135



Direct lighting

Pendant or Surface Mounted fixtures
Static White high output models at
56.7 lm/W, 465 lm/ft (1525.2 lm/m)
Min. bending diameter: 23.6 in. (600 mm)


Scroll150



Direct and Indirect lighting

Pendant or Surface Mounted fixtures
Static White high output models at
66.5 lm/W, 479 lm/ft (1571.1 lm/m)
Min. bending diameter: 23.6 in. (600 mm)


Scroll180

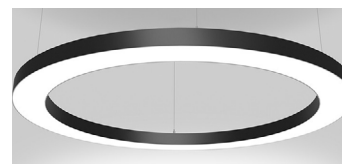

Direct lighting

Pendant or Surface Mounted fixtures
Static White high output models at
67.2 lm/W, 1109.1 lm/ft (3637.8 lm/m)
Min. bending diameter: 23.6 in. (600 mm)


Scroll135S

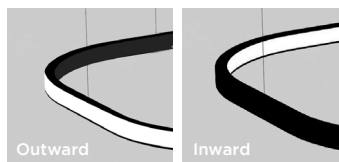

Side-illuminated

Pendant or Surface Mounted fixtures
Static White high output models at
63 lm/W, 654.7 lm/ft (2147.4 lm/m)
Min. bending diameter: 23.6 in. (600 mm)


Scroll150S

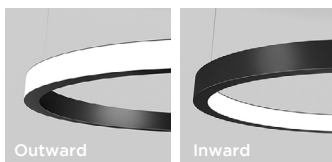

Side-illuminated

Pendant or Surface Mounted fixtures
Static White high output models at
66.2 lm/W, 695.6 lm/ft (2281.6 lm/m)
Min. bending diameter: 27.6 in. (700 mm)

Scroll180S

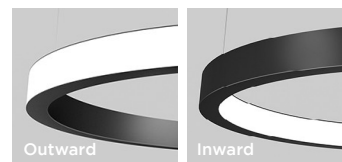

Side-illuminated

Pendant or Surface Mounted fixtures
Static White high output models at
71.8 lm/W, 1507.9 lm/ft (4945.9 lm/m)
Min. bending diameter: 27.6 in. (700 mm)