



Date _____ Project _____

Notes _____

SCROLL35 PENDANT FIXTURE

Fashion graceful custom fixtures with open curves or bold signature lighting pieces with the Scroll Pendant Series from Acolyte. Design fully closed shapes like simple circles and triangles or complex undulating ovals, squares and lines, all manufactured to your precise specification. If you can draw it, we can do it! The incredibly flexible Scroll Pendant Series also allows us to generate complementary custom luminaires in surface mounted fixtures.

- Pendant or surface mounted fixtures
- Static White at 2700K, 3000K, 3500K, 4000K
- 90+ CRI at 105 lm/W
- Minimum bending diameter: 31.5 in. (800 mm)
- Variable White or RGBW available
- Standard silver finish
- Special order Black, White, Gold or custom RAL

HOUSING FINISHES



Silver Black White Gold

Default finish


Note: Custom colors available upon request

LENS FINISH



Milky Lens
74% Light Transmission

MOUNTING OPTIONS



Surface Mount

Suspended Mount

AVAILABLE COLOR TEMPERATURES & COLORS



2700K 3000K 3500K 4000K RGBW VW




ORDERING GUIDE

Fixture Length	Output (VW and RGBW in Standard Output only)	Mounting Type	Color Temperature and Colors Direct	
SL35				
SL35 - Scroll 35 Fixture	LO - Low Direct Only SO - Standard Direct Only HO - High Direct Only	P - Suspended Pendant S - Surface	27 - 2700K 30 - 3000K 35 - 3500K	40 - 4000K VW - Variable White RGBW - RGBW
Surface Finish				
SL - Silver	GD - Gold			
BK - Black	C - Custom			
WH - White				

SPECIFICATIONS

Beam Angle	110°
Lens Type	Milky Lens (PMMA)
Length	Continuous lengths available. Lens max lengths are 19 ft 8 in. (6 m)
Operating Voltage	Low-voltage constant current (remote driver with 100-277V AC input)
Dimming	0-10V, DALI
Available Colors	2700K, 3000K, 3500K, 4000K, VW, RGBW
Efficacy (Static White)	105 lm/W
Lumens (Static White)	665-735 lm/ft (2180-2410 lm/m)
CRI	90+
Certifications	UL, CE, RoHS

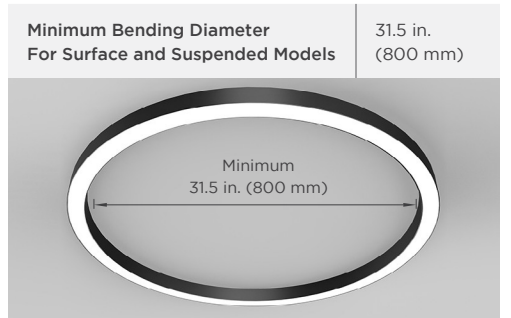

ACCESSORIES

Coupler	Suspended Mounting Kit (included accessory)	End Caps (included accessory)
<p>Part #: SL35COUP</p>		

DIMENSIONS

SURFACE / SUSPENDED

A cross-sectional diagram of the scroll pendant fixture. It shows the curved profile of the fixture. Dimension lines indicate the width and height. The width is labeled as 1.38 in. (35 mm) and the height is labeled as 1.48 in. (37.5 mm).

Width: 1.38 in. (35 mm)
Height: 1.48 in. (37.5 mm)
Length: Up to 19 ft 8 in. (6 m)

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

SUGGESTED SUSPENSION WIRE SEPARATED DISTANCES

SUGGESTED SUSPENSION WIRE SEPARATED DISTANCES

