


SCROLL50 PENDANT FIXTURE

Fashion graceful custom fixtures with open curves or bold signature lighting pieces with the Scroll Pendant Series from Acolyte. Design fully closed shapes like simple circles and triangles or complex undulating ovals, squares and lines, all manufactured to your precise specification. If you can draw it, we can do it! The incredibly flexible Scroll Pendant Series also allows us to generate complementary custom luminaires in surface mounted fixtures.


- Pendant or surface mounted fixtures
- Direct or Direct/Indirect (sconce/pendant) lighting option
- Static White at 2700K, 3000K, 3500K, 4000K
- 90+ CRI at 105 lm/W
- Minimum bending diameter: 39.4 in. (1000 mm)
- Variable White or RGBW available
- Standard silver finish
- Special order Black, White, Gold or custom RAL

HOUSING FINISHES

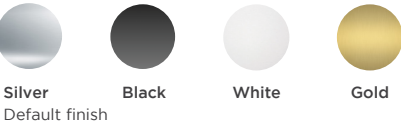


Note: Custom colors available upon request


LENS FINISH





MOUNTING OPTIONS



ILLUMINATION OPTIONS



AVAILABLE COLOR TEMPERATURES & COLORS

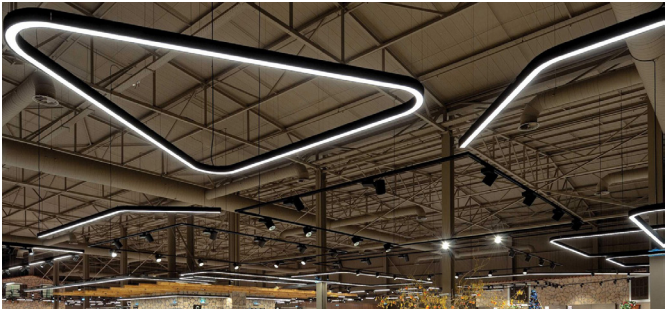

ORDERING GUIDE

Fixture Length		Output (VW and RGBW in Standard Output only)		Mounting Type	
SL50					
SL50 - Scroll 50 Fixture		LO - Low Direct Only	SO-LO - Standard Direct, Low Indirect	P - Suspended Pendant	
		SO - Standard Direct Only	SO-SO - Standard Direct, Standard Indirect	S - Surface	
		HO - High Direct Only	SO-HO - Standard Direct, High Indirect		
		LO-LO - Low Direct, Low Indirect	HO-LO - High Direct, Low Indirect		
		LO-SO - Low Direct, Standard Indirect	HO-SO - High Direct, Standard Indirect		
		LO-HO - Low Direct, High Indirect	HO-HO - High Direct, High Indirect		
Color Temperature and Colors Direct		Color Temperature and Colors Indirect (If direct lighting only, leave this field blank)		Surface Finish	
27 - 2700K	40 - 4000K	27 - 2700K	40 - 4000K	SL - Silver	GD - Gold
30 - 3000K	VW - Variable White	30 - 3000K	VW - Variable White	BK - Black	C - Custom
35 - 3500K	RGBW - RGBW	35 - 3500K	RGBW - RGBW	WH - White	




## SPECIFICATIONS

Beam Angle	110°
Lens Type	Milky Lens (PMMA)
Length	Continuous lengths available. Lens max lengths are 19 ft 8 in. (6 m)
Operating Voltage	Low-voltage constant current (remote driver with 100-277V AC input)
Dimming	0-10V, DALI
Available Colors	2700K, 3000K, 3500K, 4000K, VW, RGBW
Efficacy (Static White)	105 lm/W
Lumens (Static White)	665-735 lm/ft (2180-2410 lm/m)
CRI	90+
Certifications	UL, CE, RoHS



Minimum Bending Diameter For Surface and Suspended Models	39.4 in. (1000 mm)
--	-----------------------



## ACCESSORIES

Coupler	Suspended Mounting Kit (included accessory)	End Caps (included accessory)
<p>Part #: SL50COUP</p> 		

## DIMENSIONS

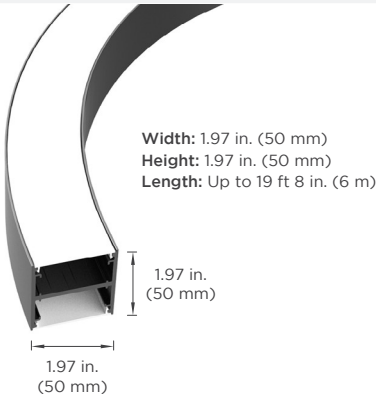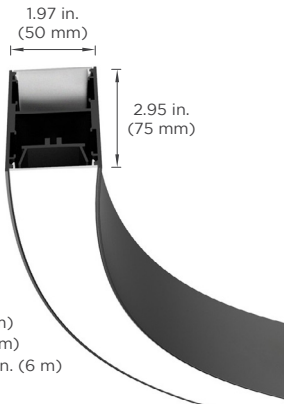SURFACE / SUSPENDED OPTION 1	SURFACE / SUSPENDED OPTION 2
 <p>Width: 1.97 in. (50 mm) Height: 1.97 in. (50 mm) Length: Up to 19 ft 8 in. (6 m)</p>	 <p>Width: 1.97 in. (50 mm) Height: 2.95 in. (75 mm) Length: Up to 19 ft 8 in. (6 m)</p>

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

SUGGESTED SUSPENSION WIRE SEPARATED DISTANCES

SUGGESTED SUSPENSION WIRE SEPARATED DISTANCES

