


Date _____ Project _____

Notes _____

SCROLL50 PENDANT FIXTURE


Fashion graceful custom fixtures with open curves or bold signature lighting pieces with the Scroll Pendant Series from Acolyte. Design fully closed shapes like simple circles and triangles or complex undulating ovals, squares and lines, all manufactured to your precise specification. If you can draw it, we can do it! The incredibly flexible Scroll Pendant Series also allows us to generate complementary custom luminaires in surface mounted fixtures.

- Pendant or surface mounted fixtures
- Direct or Direct/Indirect (sconce/pendant) lighting option
- Static White at 2700K, 3000K, 3500K, 4000K
- 90+ CRI at 105 lm/W
- Minimum bending diameter: 39.4 in. (1000 mm)
- Variable White or RGBW available
- Standard silver finish
- Special order Black, White, Gold or custom RAL

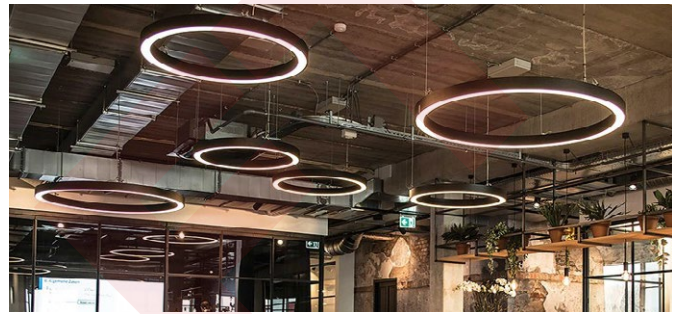


⚠ Product is in final stages of development. Specifications are preliminary targets subject to change before product launch.

HOUSING FINISHES




Silver Default finish
Black
White
Gold
Note: Custom colors available upon request


LENS FINISH




MOUNTING OPTIONS



ILLUMINATION OPTIONS




AVAILABLE COLOR TEMPERATURES & COLORS






ORDERING GUIDE

Fixture Length	Output (VW and RGBW in Standard Output only)	Mounting Type
SL50		
SL50 - Scroll 50 Fixture	LO - Low Direct Only SO - Standard Direct Only HO - High Direct Only LO-LO - Low Direct, Low Indirect LO-SO - Low Direct, Standard Indirect LO-HO - Low Direct, High Indirect	SO-LO - Standard Direct, Low Indirect SO-SO - Standard Direct, Standard Indirect SO-HO - Standard Direct, High Indirect HO-LO - High Direct, Low Indirect HO-SO - High Direct, Standard Indirect HO-HO - High Direct, High Indirect
		P - Suspended Pendant S - Surface
Color Temperature and Colors Direct	Color Temperature and Colors Indirect (If direct lighting only, leave this field blank)	Surface Finish
27 - 2700K 40 - 4000K 30 - 3000K VW - Variable White 35 - 3500K RGBW - RGBW	27 - 2700K 40 - 4000K 30 - 3000K VW - Variable White 35 - 3500K RGBW - RGBW	SL - Silver GD - Gold BK - Black C - Custom WH - White

SPECIFICATIONS

Beam Angle	110°	Minimum Bending Diameter For Surface and Suspended Models	39.4 in. (1000 mm)
Lens Type	Milky Lens (PMMA)		
Length	Continuous lengths available. Lens max lengths are 19 ft 8 in. (6 m)		
Operating Voltage	Low-voltage constant current (remote driver with 100-277V AC input)		
Dimming	0-10V, DALI		
Available Colors	2700K, 3000K, 3500K, 4000K, VW, RGBW		
Efficacy (Static White)	105 lm/W		
Lumens (Static White)	665-735 lm/ft (2180-2410 lm/m)		
CRI	90+		
Certifications	UL, CE, RoHS		

ACCESSORIES

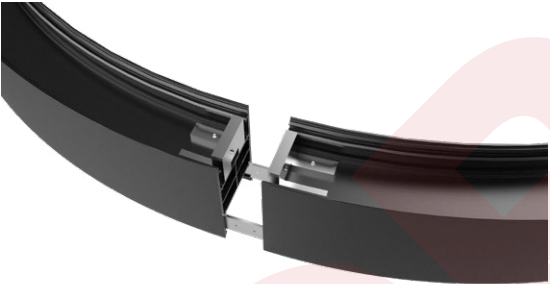Coupler	Suspended Mounting Kit (included accessory)	End Caps (included accessory)
Part #: XXXXXX		
		

DIMENSIONS

SURFACE / SUSPENDED OPTION 1	SURFACE / SUSPENDED OPTION 2
 <p>Width: 1.97 in. (50 mm) Height: 1.97 in. (50 mm) Length: Up to 19 ft 8 in. (6 m)</p>	 <p>Width: 1.97 in. (50 mm) Height: 2.95 in. (75 mm) Length: Up to 19 ft 8 in. (6 m)</p>

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

SUGGESTED SUSPENSION WIRE SEPARATED DISTANCES

SUGGESTED SUSPENSION WIRE SEPARATED DISTANCES

