

## SCROLL80 PENDANT FIXTURE

Fashion graceful custom fixtures with open curves or bold signature lighting pieces with the Scroll Pendant Series from Acolyte. Design fully closed shapes like simple circles and triangles or complex undulating ovals, squares and lines, all manufactured to your precise specification. If you can draw it, we can do it! The incredibly flexible Scroll Pendant Series also allows us to generate complementary custom luminaires in surface mounted fixtures.

- Pendant or surface mounted fixtures
- Static White at 2700K, 3000K, 3500K, 4000K
- 90+ CRI at 105 lm/W
- Minimum bending diameter: 23.6 in. (600 mm)
- Variable White or RGBW available
- Standard silver finish
- Special order Black, White, Gold or custom RAL

### HOUSING FINISHES



Silver  
Default finish

Black

White

Gold


Note: Custom colors available upon request

### LENS FINISH



Milky Lens  
74% Light Transmission


### MOUNTING OPTIONS

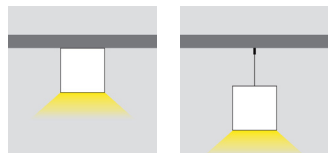

Surface Mount

Suspended Mount

### AVAILABLE COLOR TEMPERATURES & COLORS



2700K



3000K

3500K

4000K

RGBW

VW

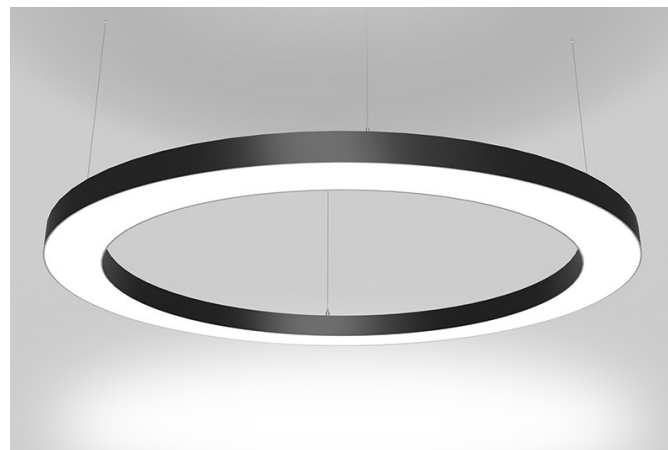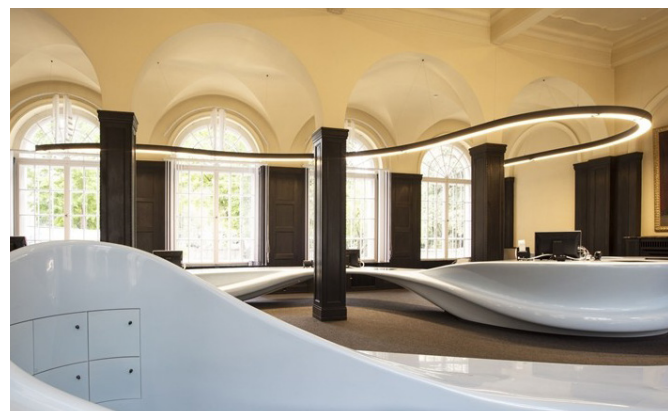

**RoHS IP20**

### ORDERING GUIDE

Fixture Length	Output (VW and RGBW in Standard Output only)	Mounting Type	Color Temperature and Colors Direct	
<b>SL80</b>				
<b>SL80</b> - Scroll 80 Fixture	<b>LO</b> - Low Direct Only <b>SO</b> - Standard Direct Only <b>HO</b> - High Direct Only	<b>P</b> - Suspended Pendant <b>S</b> - Surface	<b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K	<b>40</b> - 4000K <b>VW</b> - Variable White <b>RGBW</b> - RGBW
<b>Surface Finish</b>				
<b>SL</b> - Silver	<b>GD</b> - Gold			
<b>BK</b> - Black	<b>C</b> - Custom			
<b>WH</b> - White				




## SPECIFICATIONS

Beam Angle	110°
Lens Type	Milky Lens (PMMA)
Length	Continuous lengths available. Lens max lengths are 19 ft 8 in. (6 m)
Operating Voltage	Low-voltage constant current (remote driver with 100-277V AC input)
Dimming	0-10V, DALI
Available Colors	2700K, 3000K, 3500K, 4000K, VW, RGBW
Efficacy (Static White)	105 lm/W
Lumens (Static White)	665-735 lm/ft (2180-2410 lm/m)
CRI	90+
Certifications	UL, CE, RoHS

Minimum Bending Diameter	23.6 in. (600 mm)
--------------------------	-------------------



## ACCESSORIES

Coupler	Suspended Mounting Kit (included accessory)	End Caps (included accessory)
<p>Part #: SL80COUP</p> 		

## DIMENSIONS

SURFACE / SUSPENDED	
<p>Width: 3.15 in. (80 mm) Height: 1.48 in. (37.5 mm) Length: Up to 19 ft 8 in. (6 m)</p>	

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

SUGGESTED SUSPENSION WIRE SEPARATED DISTANCES

SUGGESTED SUSPENSION WIRE SEPARATED DISTANCES

