





Date _____ Project _____

Notes _____

SCROLL80 PENDANT FIXTURE


Fashion graceful custom fixtures with open curves or bold signature lighting pieces with the Scroll Pendant Series from Acolyte. Design fully closed shapes like simple circles and triangles or complex undulating ovals, squares and lines, all manufactured to your precise specification. If you can draw it, we can do it! The incredibly flexible Scroll Pendant Series also allows us to generate complementary custom luminaires in surface mounted fixtures.

- Pendant or surface mounted fixtures
- Static White at 2700K, 3000K, 3500K, 4000K
- 90+ CRI at 105 lm/W
- Minimum bending diameter: 23.6 in. (600 mm)
- Variable White or RGBW available
- Standard silver finish
- Special order Black, White, Gold or custom RAL

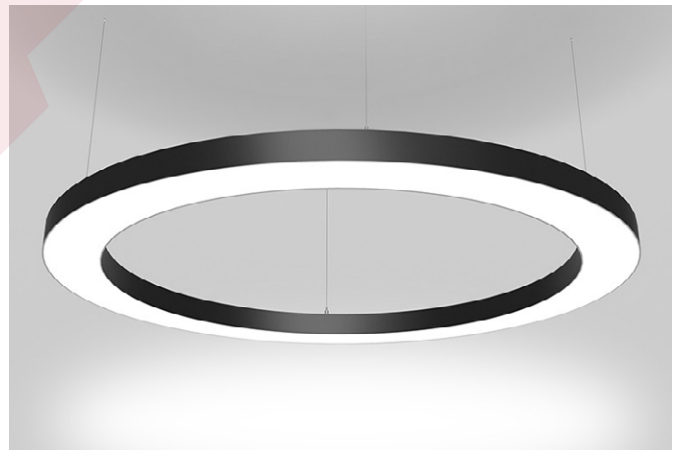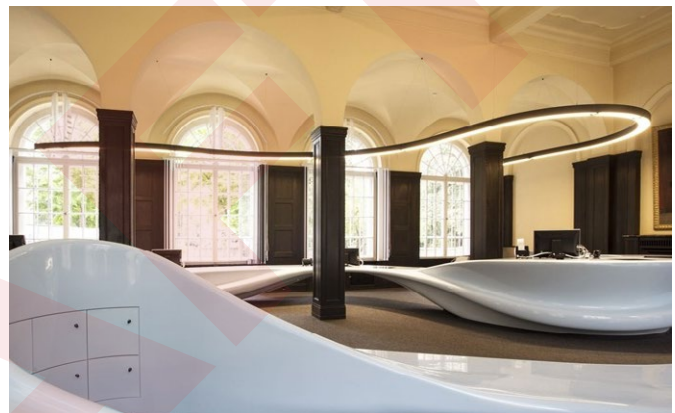


⚠ Product is in final stages of development. Specifications are preliminary targets subject to change before product launch.

HOUSING FINISHES

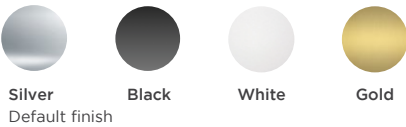


Note: Custom colors available upon request


LENS FINISH



MOUNTING OPTIONS

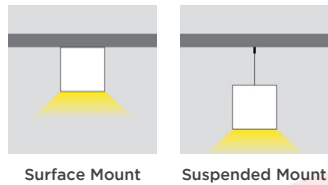

AVAILABLE COLOR TEMPERATURES & COLORS




ORDERING GUIDE




Fixture Length	Output (VW and RGBW in Standard Output only)	Mounting Type	Color Temperature and Colors Direct	
SL80				
SL80 - Scroll 80 Fixture	LO - Low Direct Only SO - Standard Direct Only HO - High Direct Only	P - Suspended Pendant S - Surface	27 - 2700K 30 - 3000K 35 - 3500K	40 - 4000K VW - Variable White RGBW - RGBW
Surface Finish				
SL - Silver	GD - Gold			
BK - Black	C - Custom			
WH - White				




SPECIFICATIONS

Beam Angle	110°	Minimum Bending Diameter	23.6 in. (600 mm)
Lens Type	Milky Lens (PMMA)		
Length	Continuous lengths available. Lens max lengths are 19 ft 8 in. (6 m)		
Operating Voltage	Low-voltage constant current (remote driver with 100-277V AC input)		
Dimming	0-10V, DALI		
Available Colors	2700K, 3000K, 3500K, 4000K, VW, RGBW		
Efficacy (Static White)	105 lm/W		
Lumens (Static White)	665-735 lm/ft (2180-2410 lm/m)		
CRI	90+		
Certifications	UL, CE, RoHS		

ACCESSORIES

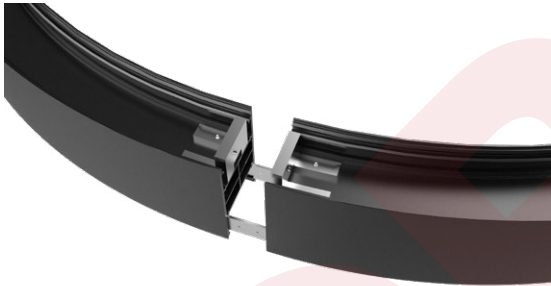Coupler	Suspended Mounting Kit (included accessory)	End Caps (included accessory)
Part #: XXXXXX 		

DIMENSIONS

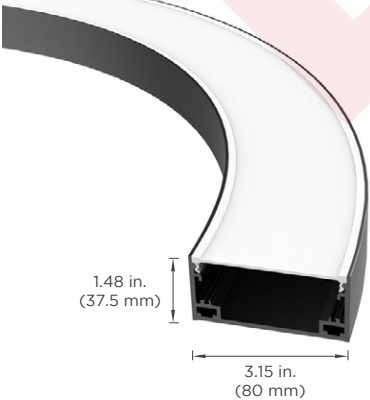SURFACE / SUSPENDED
 <p>Width: 3.15 in. (80 mm) Height: 1.48 in. (37.5 mm) Length: Up to 19 ft 8 in. (6 m)</p>

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

SUGGESTED SUSPENSION WIRE SEPARATED DISTANCES

SUGGESTED SUSPENSION WIRE SEPARATED DISTANCES

